


RS4G08 Quadruple 2-Input Positive-AND Gate

FEATURES

- Operating Voltage Range: 1.65V to 5.5V
- Low Power Consumption: 1 μ A (Max)
- Operating Temperature Range: -40°C to +125°C
- Inputs Accept Voltage to 5.5V
- High Output Drive: ± 24 mA at V_{CC}=3.0V
- PACKAGES: SOIC-14(SOP14) and TSSOP-14

APPLICATIONS

- Active Noise Elimination
- Bar Code Scanner
- Blood Pressure Monitor
- CPAP Machine
- Fingerprint identification
- IP Phone: Wired and Wireless
- Network attached storage (NAS)
- Private Branch Exchange (PBX)

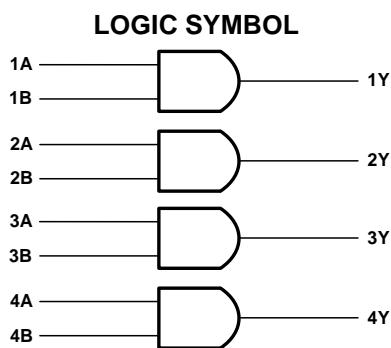

DESCRIPTION

The RS4G08 quadruple 2-input positive-AND gate is designed for 1.65V to 5.5V V_{CC} operation.

The RS4G08 device performs the Boolean function Y=A • B or Y= A + B̄ in positive logic. The device is fully specified for partial-power-down applications using I_{OFF}. The I_{OFF} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

The RS4G08 is available in Green SOIC-14(SOP14) and TSSOP-14 packages. It operates over an ambient temperature range of -40°C to +125°C.

Device Information ⁽¹⁾

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|----------------|-----------------|
| RS4G08 | SOIC-14(SOP14) | 8.65mm × 3.90mm |
| | TSSOP-14 | 5.00mm × 4.40mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

FUNCTION TABLE

| INPUTS | | OUTPUT |
|--------|---|--------|
| A | B | Y |
| H | H | H |
| L | H | L |
| H | L | L |
| L | L | L |

Y=A•B

H=High Voltage Level

L=Low Voltage Level


Revision History

Note: Page numbers for previous revisions may different from page numbers in the current version.

| VERSION | Change Date | Change Item |
|---------|-------------|---------------------------|
| A.1 | 2021/4/16 | Initial version completed |

PIN CONFIGURATIONS

TOP VIEW

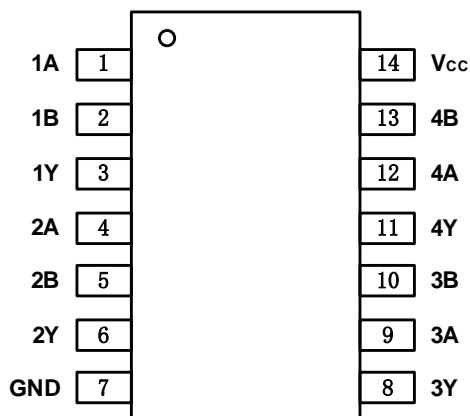

SOIC-14(SOP14)/TSSOP-14

PIN DESCRIPTION

| PIN | NAME | I/O TYPE | FUNCTION |
|-----------------------------|------|----------|-----------------------|
| SOIC-14(SOP14) /TSSOP-14 | | | |
| 1 | 1A | I | Channel 1 logic input |
| 2 | 1B | I | Channel 1 logic input |
| 3 | 1Y | O | Logic level output1 |
| 4 | 2A | I | Channel 2 logic input |
| 5 | 2B | I | Channel 2 logic input |
| 6 | 2Y | O | Logic level output2 |
| 7 | GND | - | Ground |
| 8 | 3Y | O | Logic level output3 |
| 9 | 3A | I | Channel 3 logic input |
| 10 | 3B | I | Channel 3 logic input |
| 11 | 4Y | O | Logic level output4 |
| 12 | 4A | I | Channel 4 logic input |
| 13 | 4B | I | Channel 4 logic input |
| 14 | Vcc | - | Power Supply |

Specifications

Absolute Maximum Ratings ⁽¹⁾

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾⁽²⁾

| | | MIN | MAX | UNIT |
|------------------|---|-------------------|----------------------|------|
| V _{CC} | Supply voltage range | -0.5 | 6.5 | V |
| V _I | Input voltage range ⁽²⁾ | -0.5 | 6.5 | V |
| V _O | Voltage range applied to any output in the high-impedance or power-off state ⁽²⁾ | -0.5 | 6.5 | V |
| V _O | Voltage range applied to any output in the high or low state ⁽²⁾⁽³⁾ | -0.5 | V _{CC} +0.5 | V |
| I _{IK} | Input clamp current | V _I <0 | -50 | mA |
| I _{OK} | Output clamp current | V _O <0 | -50 | mA |
| I _O | Continuous output current | | ±50 | mA |
| | Continuous current through V _{CC} or GND | | ±100 | mA |
| T _J | Junction temperature | | 150 | °C |
| T _{STG} | Storage temperature | -65 | 150 | °C |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The value of V_{CC} is provided in the *Recommended Operating Conditions table*.

ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|------------------------|---------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM) | ±8000 V |
| | | Machine model (MM) | ±500 V |

Thermal Information:

| THERMAL METRIC ⁽¹⁾ | | RS4G08 | | UNIT | |
|-------------------------------|--|----------------|----------|------|--|
| | | 14PINS | | | |
| | | SOIC-14(SOP14) | TSSOP-14 | | |
| R _{θJA} | Junction-to-ambient thermal resistance | 122.2 | 141.2 | °C/W | |
| R _{θJC(top)} | Junction-to-case(top) thermal resistance | 80.9 | 78.8 | °C/W | |
| R _{θJB} | Junction-to-board thermal resistance | 80.6 | 85.8 | °C/W | |
| Ψ _{JT} | Junction-to-top characterization parameter | 40.4 | 27.7 | °C/W | |
| Ψ _{JB} | Junction-to-board characterization parameter | 80.3 | 85.5 | °C/W | |
| R _{θJC(bot)} | Junction-to-case(bottom) thermal resistance | N/A | N/A | °C/W | |

PACKAGE/ORDERING INFORMATION

| PRODUCT | ORDERING NUMBER | TEMPERATURE RANGE | PACKAGE LEAD | PACKAGE MARKING ⁽¹⁾ | PACKAGE OPTION |
|---------|-----------------|-------------------|----------------|--------------------------------|--------------------|
| RS4G08 | RS4G08XP | -40°C ~+125°C | SOIC-14(SOP14) | RS4G08 | Tape and Reel,4000 |
| | RS4G08XQ | -40°C ~+125°C | TSSOP-14 | RS4G08 | Tape and Reel,4000 |

NOTE:

- (1) There may be additional marking, which relates to the lot trace code information(data code and vendor code), the logo or the environmental category on the device.

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (TYP values are at $T_A = +25^\circ\text{C}$, unless otherwise noted.)⁽¹⁾

Recommended Operating Conditions

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | MAX | UNIT |
|-------------------------------|------------|--|----------------------|----------------------|------|
| Supply voltage | V_{CC} | Operating | 1.65 | 5.5 | V |
| | | Data retention only | 1.5 | 5.5 | |
| High-level input voltage | V_{IH} | $V_{CC}=1.65\text{V}$ to 1.95V | $0.65 \times V_{CC}$ | | V |
| | | $V_{CC}=2.3\text{V}$ to 2.7V | 1.7 | | |
| | | $V_{CC}=3\text{V}$ to 3.6V | 2.2 | | |
| | | $V_{CC}=4.5\text{V}$ to 5.5V | $0.7 \times V_{CC}$ | | |
| Low-level input voltage | V_{IL} | $V_{CC}=1.65\text{V}$ to 1.95V | | $0.15 \times V_{CC}$ | V |
| | | $V_{CC}=2.3\text{V}$ to 2.7V | | 0.3 | |
| | | $V_{CC}=3\text{V}$ to 3.6V | | 0.4 | |
| | | $V_{CC}=4.5\text{V}$ to 5.5V | | $0.15 \times V_{CC}$ | |
| Input voltage | V_I | | 0 | 5.5 | V |
| Output voltage | V_O | | 0 | V_{CC} | V |
| Input transition rise or fall | t_r, t_f | $V_{CC}=1.8\text{V} \pm 0.15\text{V}, 2.5\text{V} \pm 0.2\text{V}$ | | 20 | ns/V |
| | | $V_{CC}=3.3\text{V} \pm 0.3\text{V}$ | | 10 | |
| | | $V_{CC}=5\text{V} \pm 0.5\text{V}$ | | 5 | |
| Operating temperature | T_A | | -40 | +125 | °C |

DC Characteristics


| PARAMETER | TEST CONDITIONS | | V_{CC} | TEMP | MIN | TYP | MAX | UNIT | |
|-----------------|----------------------------|--|---------------|--------------|-----|-----------|----------|---------------|--|
| V_{OH} | $I_{OH} = -100\mu\text{A}$ | 1.65V to 5.5V | Full | $V_{CC}-0.1$ | | | | V | |
| | $I_{OH} = -4\text{mA}$ | 1.65V | | 1.2 | | | | | |
| | $I_{OH} = -8\text{mA}$ | 2.3V | | 1.9 | | | | | |
| | $I_{OH} = -16\text{mA}$ | 3V | | 2.4 | | | | | |
| | $I_{OH} = -24\text{mA}$ | | | 2.3 | | | | | |
| | $I_{OH} = -32\text{mA}$ | 4.5V | | 3.8 | | | | | |
| V_{OL} | $I_{OL} = 100\mu\text{A}$ | 1.65V to 5.5V | Full | | | 0.1 | | V | |
| | $I_{OL} = 4\text{mA}$ | 1.65V | | | | 0.45 | | | |
| | $I_{OL} = 8\text{mA}$ | 2.3V | | | | 0.3 | | | |
| | $I_{OL} = 16\text{mA}$ | 3V | | | | 0.4 | | | |
| | $I_{OL} = 24\text{mA}$ | | | | | 0.55 | | | |
| | $I_{OL} = 32\text{mA}$ | 4.5V | | | | 0.55 | | | |
| I_I | A or B inputs | $V_I=5.5\text{V}$ or GND | 0V to 5.5V | +25°C | | ± 0.1 | ± 1 | μA | |
| | | | | Full | | | ± 5 | | |
| I_{off} | | V_I or $V_O=5.5\text{V}$ | 0 | +25°C | | ± 0.1 | ± 1 | μA | |
| | | | | Full | | | ± 10 | | |
| I_{cc} | | $V_I=5.5\text{V}$ or GND, $I_O=0$ | 1.65V to 5.5V | +25°C | | 0.1 | 1 | μA | |
| | | | | Full | | | 10 | | |
| ΔI_{cc} | | One input at $V_{CC}-0.6\text{V}$, Other inputs at V_{CC} or GND | 3V to 5.5V | Full | | | 500 | μA | |

AC Characteristics

| PARAMETER | SYMBOL | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------------------------|----------|-------------------------|---------------------------|-----|------|-----|------|
| Propagation Delay | t_{pd} | $V_{cc}=1.8V \pm 0.15V$ | $C_L=30pF, R_L=1k\Omega$ | | 11.2 | | ns |
| | | $V_{cc}=2.5V \pm 0.2V$ | $C_L=30pF, R_L=500\Omega$ | | 6.5 | | |
| | | $V_{cc}=3.3V \pm 0.3V$ | $C_L=50pF, R_L=500\Omega$ | | 5.4 | | |
| | | $V_{cc}=5V \pm 0.5 V$ | $C_L=50pF, R_L=500\Omega$ | | 4.3 | | |
| Input Capacitance | C_i | $V_{cc}=0V$ | | | 4 | | pF |
| Power dissipation capacitance | C_{pd} | $V_{cc}=3.3V$ | $f=10MHz$ | | 26 | | pF |
| | | $V_{cc}=5V$ | | | 31 | | |


(1) All unused inputs of the device must be held at V_{cc} or GND to ensure proper device operation.

Parameter Measurement Information

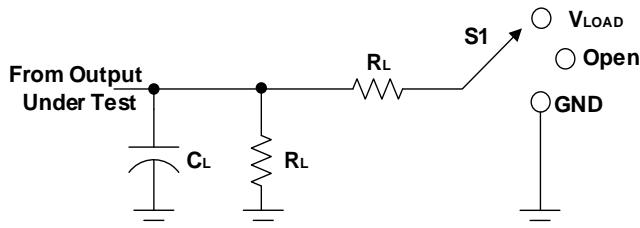

| TEST | S1 |
|-------------------|------------|
| t_{PLH}/t_{PHL} | Open |
| t_{PLZ}/t_{PZL} | V_{LOAD} |
| t_{PHZ}/t_{PZH} | GND |

| V _{cc} | INPUTS | | V _M | V _{LOAD} | C _L | | R _L | | V _Δ |
|-----------------|-----------------|------------------------------|--------------------|---------------------|----------------|------|----------------|------|----------------|
| | V _I | t _{r/t_f} | | | | | | | |
| 1.8V±0.15V | V _{cc} | ≤2ns | V _{cc} /2 | 2 x V _{cc} | 15pF | 30pF | 1MΩ | 1kΩ | 0.15V |
| 2.5V±0.2V | V _{cc} | ≤2ns | V _{cc} /2 | 2 x V _{cc} | 15pF | 30pF | 1MΩ | 500Ω | 0.15V |
| 3.3V±0.3V | 3V | ≤2.5ns | 1.5V | 6V | 15pF | 50pF | 1MΩ | 500Ω | 0.3V |
| 5V±0.5V | V _{cc} | ≤2.5ns | V _{cc} /2 | 2 x V _{cc} | 15pF | 50pF | 1MΩ | 500Ω | 0.3V |

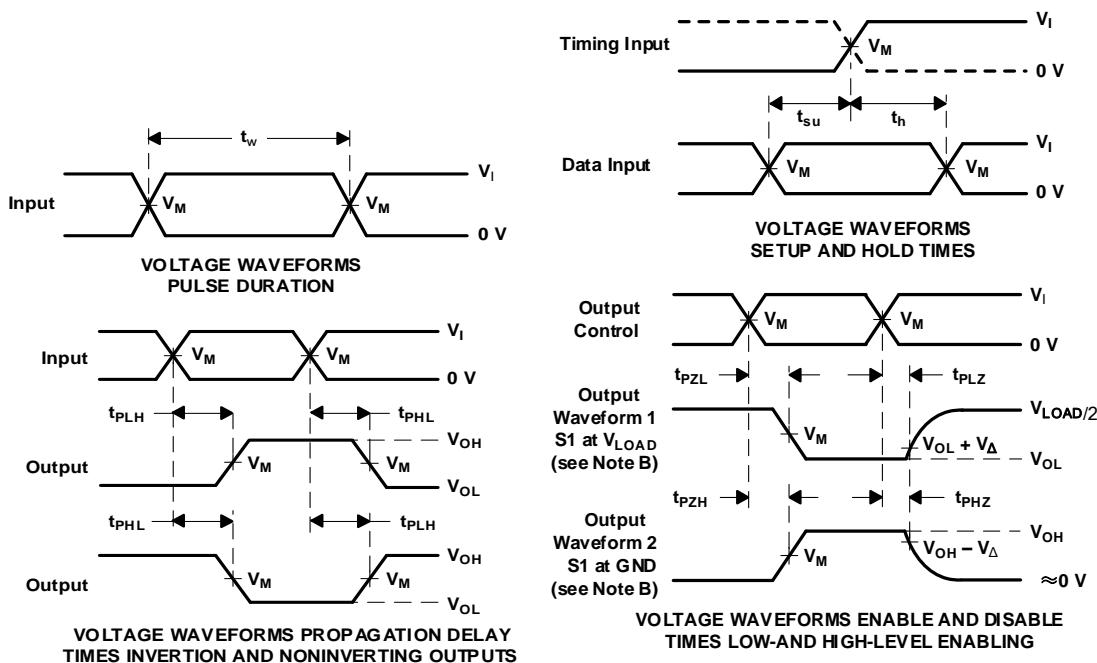

NOTES: A. CL includes probe and jig capacitance.

B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.

Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.

C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_o = 50 Ω.

D. The outputs are measured one at a time, with one transition per measurement.

E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.



F. t_{PZL} and t_{PZH} are the same as t_{en}.

G. t_{PLH} and t_{PHL} are the same as t_{pd}.



H. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms

PACKAGE OUTLINE DIMENSIONS SOIC-14(SOP14)

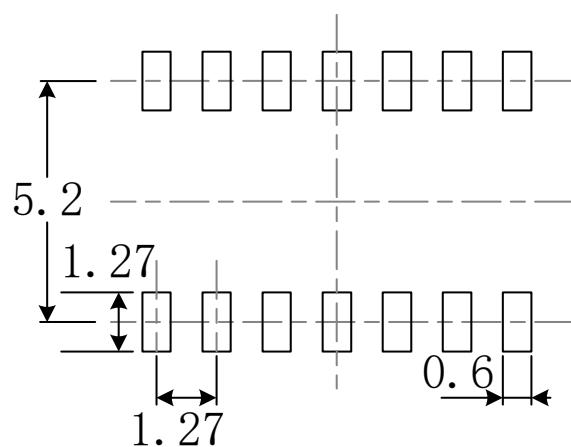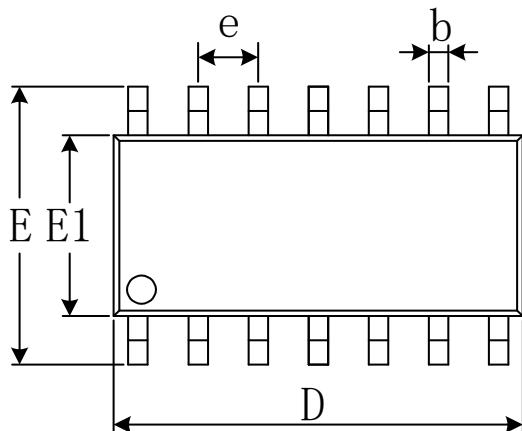


RECOMMENDED LAND PATTERN (Unit: mm)

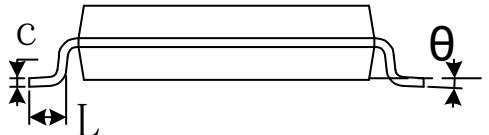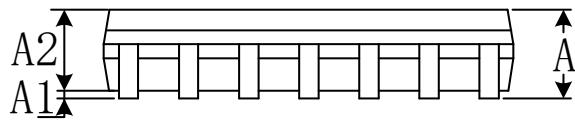


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.310 | 0.510 | 0.012 | 0.020 |
| c | 0.100 | 0.250 | 0.004 | 0.010 |
| D | 8.450 | 8.850 | 0.333 | 0.348 |
| e | 1.270(BSC) | | 0.050(BSC) | |
| E | 5.800 | 6.200 | 0.228 | 0.244 |
| E1 | 3.800 | 4.000 | 0.150 | 0.157 |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

TSSOP-14

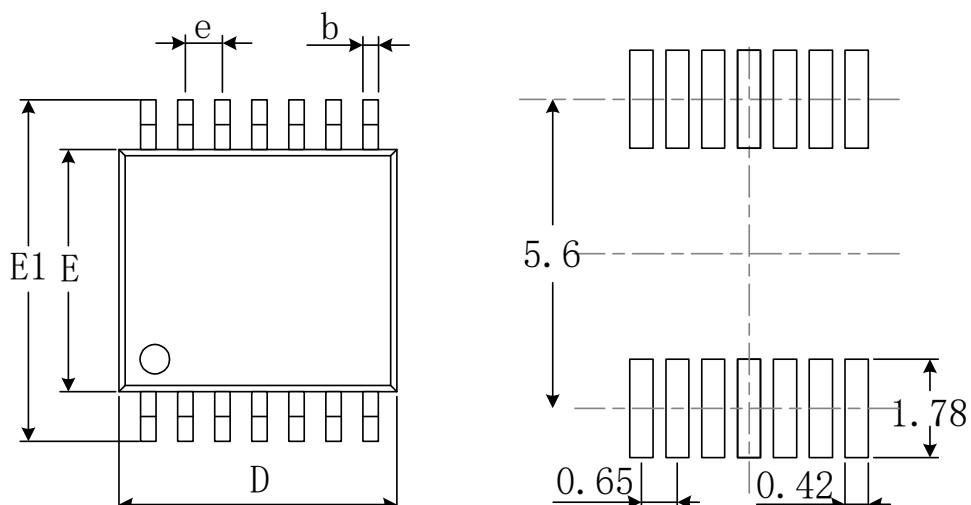

RECOMMENDED LAND PATTERN (Unit: mm)

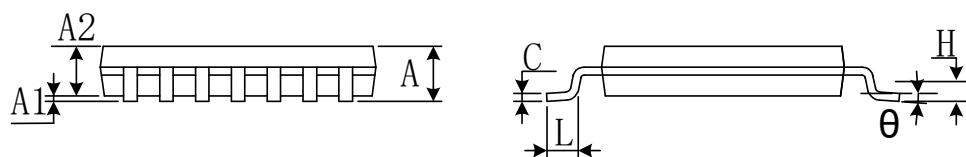

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | | 1.200 | | 0.047 |
| A1 | 0.050 | 0.150 | 0.002 | 0.006 |
| A2 | 0.800 | 1.050 | 0.031 | 0.041 |
| b | 0.190 | 0.300 | 0.007 | 0.012 |
| c | 0.090 | 0.200 | 0.004 | 0.008 |
| D | 4.860 | 5.100 | 0.191 | 0.201 |
| E | 4.300 | 4.500 | 0.169 | 0.177 |
| E1 | 6.250 | 6.550 | 0.246 | 0.258 |
| e | 0.650(BSC) | | 0.026(BSC) | |
| L | 0.500 | 0.700 | 0.020 | 0.028 |
| H | 0.25(TYP) | | 0.01(TYP) | |
| θ | 1° | 7° | 1° | 7° |

单击下面可查看定价，库存，交付和生命周期等信息

[>>Runic\(润石\)](#)