



Surface Mount Schottky Barrier Rectifier  
Reverse Voltage - 20 to 200 V  
Forward Current - 3.0A

**PINNING**

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

Top View  
Marking Code: DS32W ---S32  
DS34W ---S34  
DS36W ---S36  
DS38W ---S38  
DS310W ---S310  
DS312W ---S312  
DS315W ---S315  
DS320W ---S320  
Simplified outline SOD-123FL and symbol

**FEATURES**

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

**MECHANICAL DATA**

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 15mg 0.00048oz

**Absolute Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter   | Symbols         | DS32W      | DS34W    | DS36W | DS38W | DS310W | DS312W | DS315W | DS320W | Units |
|---|-----------------|------------|----------|-------|-------|--------|--------|--------|--------|-------|
| Maximum Repetitive Peak Reverse Voltage   | $V_{RRM}$       | 20         | 40       | 60    | 80    | 100    | 120    | 150    | 200    | V     |
| Maximum RMS voltage   | $V_{RMS}$       | 14         | 28       | 42    | 56    | 70     | 84     | 105    | 140    | V     |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 20         | 40       | 60    | 80    | 100    | 120    | 150    | 200    | V     |
| Maximum Average Forward Rectified Current   | $I_{F(AV)}$     | 3.0        |          |       |       |        |        |        |        | A     |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)         | $I_{FSM}$       | 80         |          |       |       |        |        |        |        | A     |
| Max Instantaneous Forward Voltage at 3 A  | $V_F$           | 0.55       | 0.70     |       | 0.85  |        | 0.95   |        | V      |       |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$ | $I_R$           | 0.5<br>10  | 0.3<br>5 |       |       |        | mA     |        |        |       |
| Typical Junction Capacitance <sup>(1)</sup>   | $C_j$           | 250        | 160      |       |       |        | pF     |        |        |       |
| Typical Thermal Resistance <sup>(2)</sup>   | $R_{\theta JA}$ | 80         |          |       |       |        |        |        |        | °C/W  |
| Operating Junction Temperature Range  | $T_j$           | -55 ~ +150 |          |       |       |        |        |        |        | °C    |
| Storage Temperature Range   | $T_{stg}$       | -55 ~ +150 |          |       |       |        |        |        |        | °C    |

( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.



Fig.1 Forward Current Derating Curve

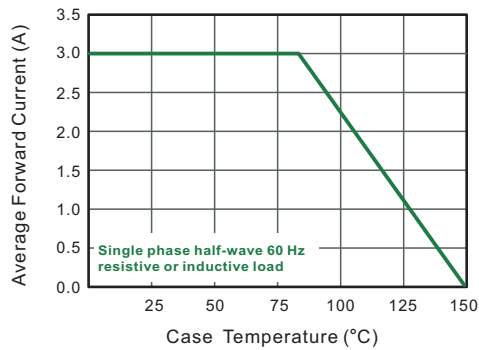


Fig.2 Typical Reverse Characteristics

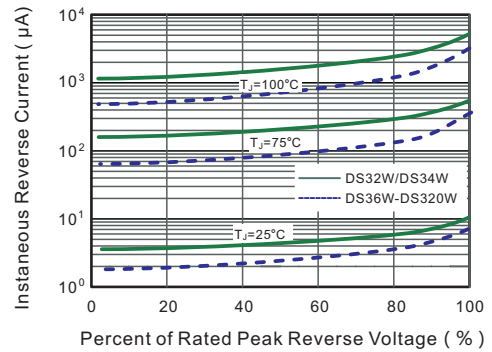


Fig.3 Typical Forward Characteristic

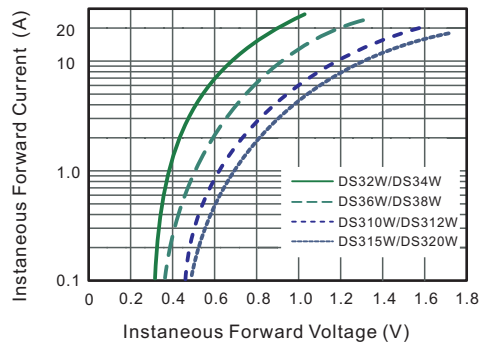


Fig.4 Typical Junction Capacitance

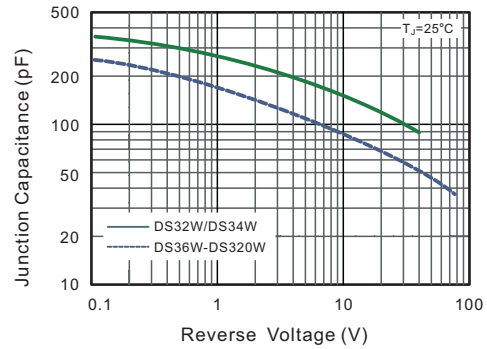


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


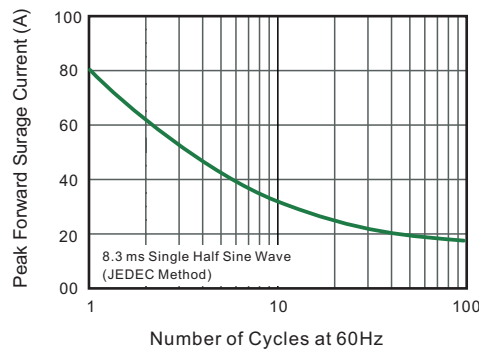


Fig.6- Typical Transient Thermal Impedance




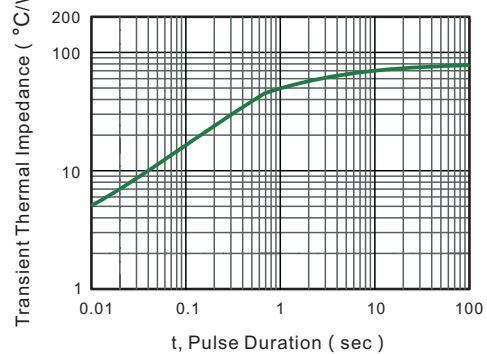


## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123FL

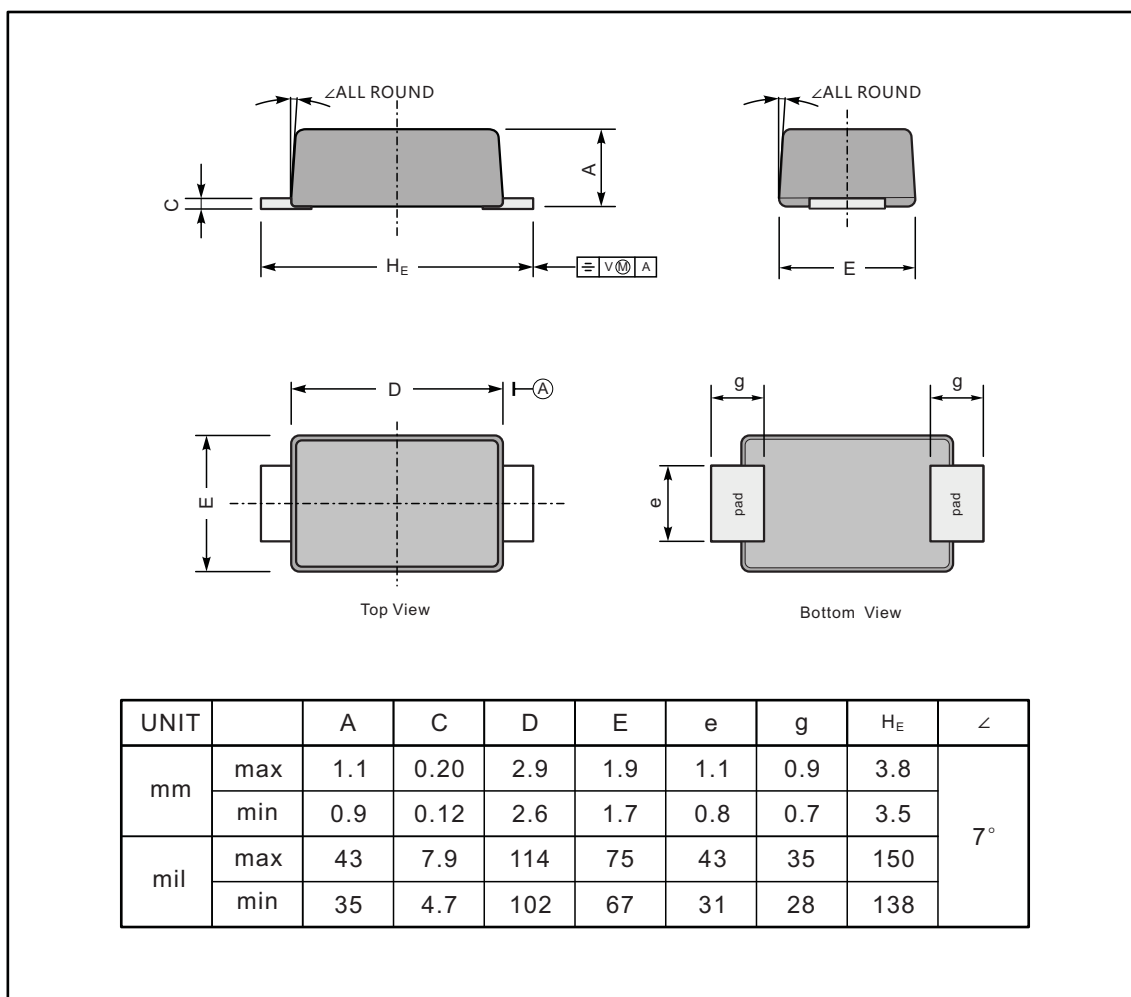

### The recommended mounting pad size

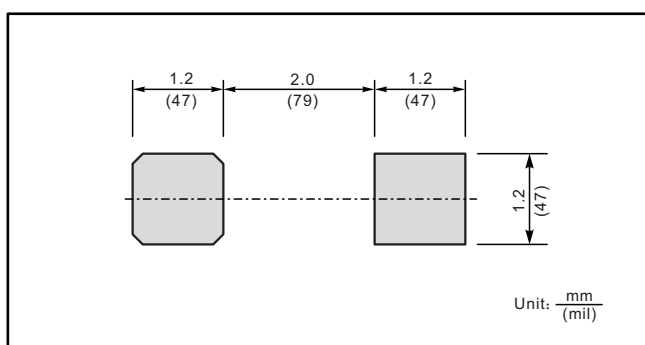

### Marking

| Type number | Marking code |
|-------------|--------------|
| DS32W       | S32          |
| DS34W       | S34          |
| DS36W       | S36          |
| DS38W       | S38          |
| DS310W      | S310         |
| DS312W      | S312         |
| DS315W      | S315         |
| DS320W      | S320         |

单击下面可查看定价，库存，交付和生命周期等信息

[>>JINGDAO\(晶导\)](#)