


PEH220, Aluminum Electrolytic, 1,200 uF, -10/+30%, 40 VDC, -40/+150°C

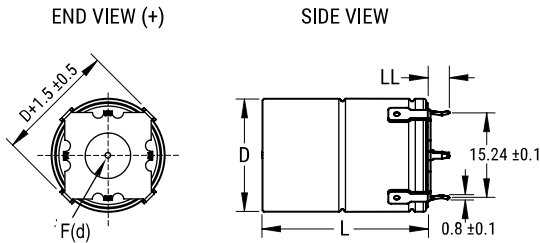

Note: '()' correspond to the letters used in the product bulletin

Dimensions	
D	16mm +/-0.5mm
L	35.7mm +/-1mm
LL	3.3mm +/-0.5mm
F	1mm +/-0.3mm

Packaging Specifications	
Weight:	11 g
Packaging:	Bulk, Bag
Packaging Quantity:	100

General Information	
Series:	PEH220
Dielectric:	Aluminum Electrolytic
Style:	Radial Crown
Description:	Radial Crown Aluminum Electrolytic
RoHS:	Yes
Lead:	Radial Crown
Qualifications:	AEC-Q200
AEC-Q200:	Yes
Notes:	Obsolete due to a packaging change. The bulk packaging option is no longer available. See PEH220KG4120QE4 for the same capacitor packaged in a tray.
Shelf Life:	156 Weeks

Specifications	
Capacitance:	1,200 uF
Capacitance Tolerance:	-10/+30%
Voltage DC:	40 VDC
Temperature Range:	-40/+150°C
Rated Temperature:	150°C
Life:	1500 Hrs
Resistance:	74 mOhms (100Hz 20C), 31 mOhms (100kHz 20C), 14.8 mOhms (5-100kHz 150C)
Ripple Current:	15.5 Amps (5kHz 125C, With Heat Sink), 9.8 Amps (5kHz 140C, With Heat Sink), 4.4 Amps (5kHz 150C, With Heat Sink), 5.7 Amps (5kHz 125C), 7.2 Amps (>=5 kHz 125C Max)
Leakage Current:	148 uA (5min 20°C)

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)

[>>点击查看相关商品](#)