


**KEMET Part Number: MMK5334J63J02L4BULK**  
(F601JJ334J063C)

MMK/F601, Film, Metallized Polyester, General Purpose, 0.33 uF, 5%, 63 VDC, 85°C, Lead Spacing = 5mm

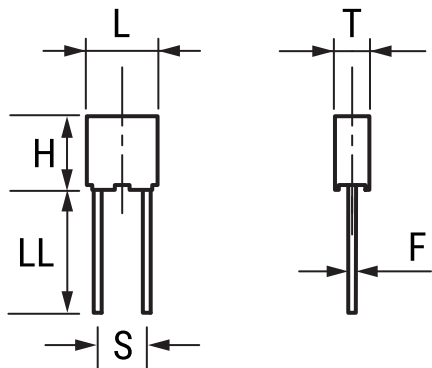

| General Information |   |
|---------------------|---|
| Series:             | MMK/F601  |
| Dielectric:         | Metallized Polyester  |
| Style:              | Radial  |
| Features:           | DC Multipurpose Applications  |
| RoHS:               | Yes   |
| Lead:               | Wire Leads  |
| Notes:              | Not For New Design, Please Check Possible Alternative Parts (AltPart) |

| Dimensions |              |
|------------|--------------|
| L          | 7.2mm MAX    |
| H          | 8mm MAX      |
| T          | 3.5mm MAX    |
| S          | 5mm +/-0.4mm |
| LL         | 5mm NOM      |
| F          | 0.5mm NOM    |

| Packaging Specifications |           |
|--------------------------|-----------|
| Packaging:               | Bulk, Bag |
| Packaging Quantity:      | 2000      |

| Specifications         |                                       |
|------------------------|---------------------------------------|
| Capacitance:           | 0.33 uF                               |
| Capacitance Tolerance: | 5%                                    |
| Voltage AC:            | 40 VAC                                |
| Voltage DC:            | 63 VDC, 48.8 VDC (100C)               |
| Temperature Range:     | -55/+100C                             |
| Rated Temperature:     | 85°C                                  |
| Dissipation Factor:    | 0.80% 1kHz, 1.20% 10kHz, 3.00% 100kHz |
| Insulation Resistance: | 15 GOhms                              |
| Max dV/dt:             | 25 V/us                               |
| Inductance:            | 6 nH                                  |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)