


VRR Indust X7R HVHT200C, Ceramic, 0.22 uF, 10%, 500 VDC, X7R, Commercial, High Temperature, HighVoltage, Lead Spacing = 10.16mm

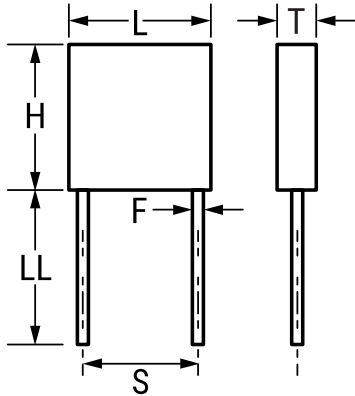

General Information	
Series:	VRR Indust X7R HVHT200C
Style:	Radial
Description:	Commercial, High Temperature, HighVoltage
Features:	Commercial
RoHS:	Yes
Termination:	Gold
Failure Rate:	N/A
Testing and Reliability:	Standard
AEC-Q200:	No

Dimensions	
L	13.2mm MAX
H	12.7mm MAX
T	7.62mm MAX
S	10.16mm +/-0.051mm
LL	31.75mm MIN
F	0.635mm +/-0.051mm

Specifications	
Capacitance:	0.22 uF
Capacitance Tolerance:	10%
Voltage DC:	500 VDC
Dielectric Withstanding Voltage:	750 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	X7R
Dissipation Factor:	2.50%
Insulation Resistance:	4.5 GOhms

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	1

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)