


F611, Film, Metallized Polyester, 100 uF, 20%, 63 VDC, 85°C, Lead Spacing = 27.5mm

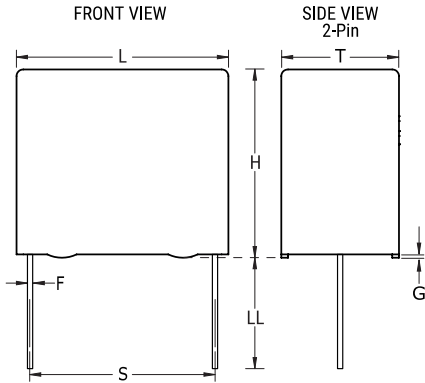

General Information	
Series:	F611
Dielectric:	Metallized Polyester
Style:	Radial
Features:	Pulse
RoHS:	Yes
Lead:	Wire Leads

Specifications	
Capacitance:	100 uF
Capacitance Tolerance:	20%
Temperature Range:	-55/+105C
Rated Temperature:	85°C
Insulation Resistance:	50 mOhms
Max dV/dt:	2 V/us
Inductance:	6 nH

Dimensions	
L	31.5mm MAX
H	37mm MAX
T	22mm MAX
S	27.5mm +/-0.4mm
LL	4mm +2/-0mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications	
Packaging:	Bulk, Tray
Packaging Quantity:	168

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)