


KEMET Part Number: PHE840MB5680MB05R25XA
(F840BE683M275ALAF1)

PHE840M/F840, Film, Metallized Polypropylene, Safety, 0.068 uF, 20%, 275 VAC (X2), 760 VDC, 105°C, Lead Spacing = 7.5mm

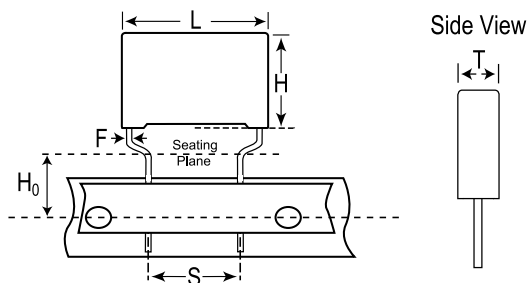

General Information	
Series:	PHE840M/F840
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	EMI Safety
RoHS:	Yes
Lead:	Formed To 7.5mm
Qualifications:	ENEC, UL, cUL
Notes:	Not For New Design, Please Check Possible Alternative Parts (AltPart)

Dimensions	
L	18mm MAX
H	12.5mm MAX
T	5.5mm MAX
S	7.5mm +0.6/-0.1mm
H0	16mm +/-0.5mm
F	0.8mm NOM

Specifications	
Capacitance:	0.068 uF
Capacitance Tolerance:	20%
Voltage AC:	275 VAC (X2)
Voltage DC:	760 VDC
Temperature Range:	-55/+105C
Rated Temperature:	105°C
Insulation Resistance:	30 GOhms
Max dV/dt:	100 V/us
Safety Class:	X2

Packaging Specifications	
Packaging:	Ammo, 330x330x50mm, Box

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)