


T396, Tantalum, MnO2 Tantalum, Commercial Grade, 4.7 uF, 10%, 16 VDC, Radial, Solid Tantalum, Three Leaded, Lead Spacing = 2.54mm

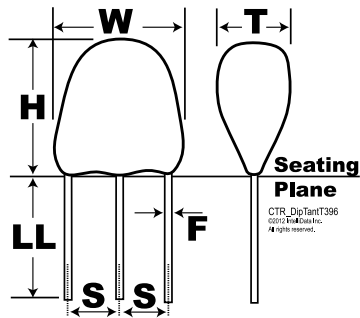

**Dimensions**

W	7.1mm
H	8.1mm
T	4.8mm
S	2.54mm +/-0.2mm
LL	4.75mm +/-1.27mm
F	0.5mm +/-0.05mm

**Packaging Specifications**

Packaging:	Bulk, Bag
Packaging Quantity:	1000

**General Information**

Series:	T396
Dielectric:	MnO2 Tantalum
Style:	Radial Three Lead
Description:	Radial, Solid Tantalum, Three Leaded
RoHS:	No
Prop 65:	<b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Construction:	Conformal
Notes:	Longest Lead Is Positive

**Specifications**

Capacitance:	4.7 uF
Capacitance Tolerance:	10%
Voltage DC:	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range:	-55/+125C
Dissipation Factor:	5.00%
Leakage Current:	0.6 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET Electronics\(基美\)](#)