


VRR Indust X7R HVHT200C, Ceramic, 4700 pF, 10%, 3000 VDC, X7R, Commercial, High Temperature, HighVoltage, Lead Spacing = 6.35mm

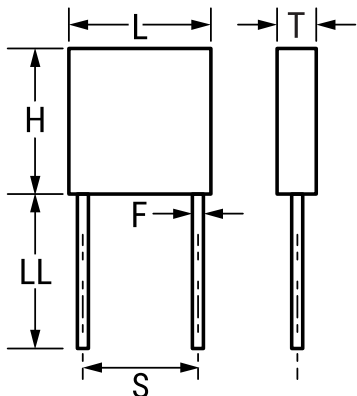

General Information	
Series:	VRR Indust X7R HVHT200C
Style:	Radial
Description:	Commercial, High Temperature, HighVoltage
Features:	Commercial
RoHS:	Yes
Termination:	Gold
Failure Rate:	N/A
Testing and Reliability:	Standard
AEC-Q200:	No

Dimensions	
L	8.89mm MAX
H	10.16mm MAX
T	6.98mm MAX
S	6.35mm +/-0.76mm
LL	31.75mm MIN
F	0.635mm +/-0.051mm

Specifications	
Capacitance:	4700 pF
Capacitance Tolerance:	10%
Voltage DC:	3000 VDC
Dielectric Withstanding Voltage:	4500 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	X7R
Dissipation Factor:	2.50%
Insulation Resistance:	100 GOhms

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	1

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)