


T353, Tantalum, MnO2 Tantalum, Commercial Grade, 68 uF, 10%, 20 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 5.08mm

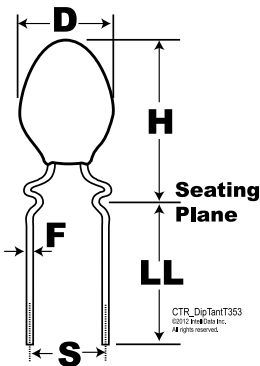

Dimensions

|    |                  |
|----|------------------|
| D  | 8.9mm            |
| H  | 18.5mm           |
| S  | 5.08mm +/-0.38mm |
| LL | 4.75mm +/-0.81mm |
| F  | 0.5mm +/-0.05mm  |

Packaging Specifications

|                     |           |
|---------------------|-----------|
| Packaging:          | Bulk, Bag |
| Packaging Quantity: | 100       |

General Information

|              |                                                                                                                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Series:      | T353                                                                                                                                                                                                    |
| Dielectric:  | MnO2 Tantalum                                                                                                                                                                                           |
| Style:       | Radial                                                                                                                                                                                                  |
| Description: | Radial, Solid Tantalum, Conformal, Dipped                                                                                                                                                               |
| Features:    | Low Leakage                                                                                                                                                                                             |
| RoHS:        | No                                                                                                                                                                                                      |
| Prop 65:     |  <b>WARNING:</b> Cancer and reproductive harm - <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> . |
| REACH:       | SVHC (Pb – CAS 7439-92-1)                                                                                                                                                                               |
| Termination: | Lead (SnPb)                                                                                                                                                                                             |
| Notes:       | Longest Lead Is Positive                                                                                                                                                                                |

Specifications

|                        |                                                     |
|------------------------|-----------------------------------------------------|
| Capacitance:           | 68 uF                                               |
| Capacitance Tolerance: | 10%                                                 |
| Voltage DC:            | 20 VDC (85C), 13 VDC (125C), 0.2 VDC (125C Reverse) |
| Temperature Range:     | -55/+125C                                           |
| Dissipation Factor:    | 8.00%                                               |
| Leakage Current:       | 4.3 uA                                              |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)