


C4BS, Film, Metallized Polypropylene, Power, 0.1 uF, 5%, 700 VAC, 2000 VDC, 70°C, Lead Spacing = 31mm

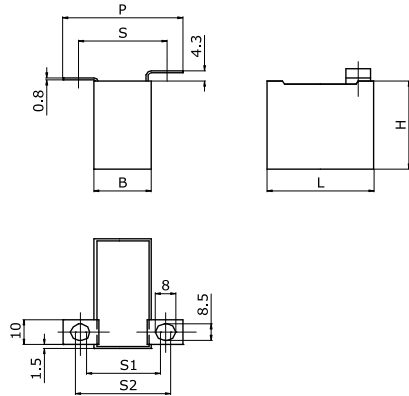

**Dimensions**

<b>L</b>	32mm NOM
<b>H</b>	33mm NOM
<b>T</b>	18mm NOM
<b>S</b>	31mm NOM
<b>S1</b>	41mm NOM
<b>P</b>	56mm NOM

**Packaging Specifications**

<b>Packaging:</b>	Bulk, Bag
<b>Packaging Quantity:</b>	65

**General Information**

<b>Series:</b>	C4BS
<b>Dielectric:</b>	Metallized Polypropylene
<b>Style:</b>	Radial
<b>Features:</b>	IGBT Circuit
<b>RoHS:</b>	Yes
<b>Lead:</b>	Flat Tabs
<b>Miscellaneous:</b>	KEMET Style E Tabs

**Specifications**

<b>Capacitance:</b>	0.1 uF
<b>Capacitance Tolerance:</b>	5%
<b>Voltage AC:</b>	700 VAC
<b>Voltage DC:</b>	2000 VDC
<b>Temperature Range:</b>	-40/+85C
<b>Rated Temperature:</b>	70°C
<b>Max dV/dt:</b>	2241 V/us
<b>Resistance:</b>	12.9 mOhms (100kHz)
<b>Ripple Current:</b>	12 Amps (100kHz 70C), 224 Amps (Peak)
<b>Inductance:</b>	36 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)