


KEMET Part Number: MMC10.2224J63A31BULK
(F160WP224J063A)

MMC/F160, Film, Metallized Polyester, General Purpose, 0.22 uF, 5%, 40 VAC, 63 VDC, 100°C, 4036, 5.5mm

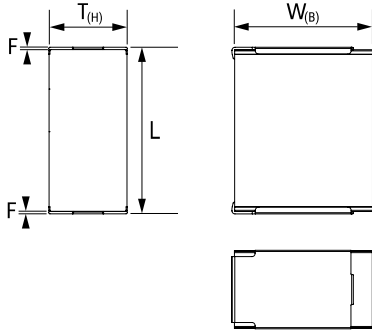

Note: '()' correspond to the letters used in the product bulletin

| Dimensions | |
|------------|-----------------|
| Chip Size | 4036 |
| L | 10.2mm +/-0.2mm |
| W | 9.1mm +/-0.2mm |
| T | 5.5mm +/-0.2mm |
| F | 0.5mm NOM |

| Packaging Specifications | |
|--------------------------|-----------|
| Packaging: | Bulk, Bag |
| Packaging Quantity: | 1000 |

| General Information | |
|---------------------|-------------------------------------|
| Series: | MMC/F160 |
| Dielectric: | Metallized Polyester |
| Style: | SMD Chip |
| RoHS: | Yes |
| AEC-Q200: | No |
| Miscellaneous: | Not For New Design. Use Series F161 |
| Shelf Life: | 104 Weeks |

| Specifications | |
|------------------------|---------------------------------------|
| Capacitance: | 0.22 uF |
| Capacitance Tolerance: | 5% |
| Voltage AC: | 40 VAC |
| Voltage DC: | 63 VDC |
| Temperature Range: | -55/+100C |
| Rated Temperature: | 100°C |
| Dissipation Factor: | 0.80% 1kHz, 1.20% 10kHz, 3.00% 100kHz |
| Insulation Resistance: | 15 GOhms |
| Max dV/dt: | 20 V/us |

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)