


KEMET Part Number: 06HV61R473K
(06HV61R473K)

HV RAD-LDD Mil X7R HV 49467, Ceramic, 0.047 uF, 10%, 600 VDC, X7R, Lead Spacing = 5.59mm

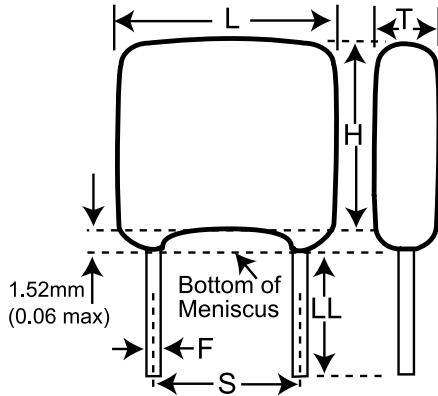

General Information	
Series:	HV RAD-LDD Mil X7R HV 49467
Style:	Radial
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Failure Rate:	N/A

Dimensions	
L	8.128mm MAX
H	7.112mm MAX
T	6.35mm MAX
S	5.588mm +/-0.762mm
LL	31.75mm MIN
F	0.635mm NOM

Specifications	
Capacitance:	0.047 uF
Capacitance Tolerance:	10%
Voltage DC:	600 VDC
Dielectric Withstanding Voltage:	900 VDC
Temperature Range:	-55/+200C
Temperature Coefficient:	X7R
Dissipation Factor:	2.5%
Insulation Resistance:	21.3 GOhms

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	1

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)