


C9T, Film, Metallized Polypropylene, AC Filter, 46.2 uF, -5/+15%, 415 VAC

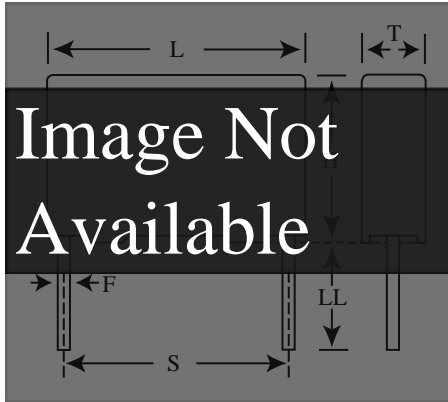

General Information	
Series:	C9T
Dielectric:	Metallized Polypropylene
Style:	Can
Features:	Three Phase PFC
RoHS:	Yes
Lead:	Quick Connect
Qualifications:	VDE
Miscellaneous:	3x Rated Capacitance, Delta Connection. Q = 7.5 kvar. Operating Freq. = 50 Hz
Notes:	Not For New Design

Dimensions	
D	60mm +/-0.5mm
L	220mm +/-2mm

Specifications	
Capacitance:	46.2 uF
Capacitance Tolerance:	-5/+15%
Voltage AC:	415 VAC
Temperature Range:	-25/+55C
Rated Temperature:	55°C
Max dV/dt:	30 V/us
Ripple Current:	10.4 Amps

Packaging Specifications	
Mounting:	Bolt - M12x16
Packaging:	Bulk, Bag
Packaging Quantity:	9

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)