


T340, Tantalum, MnO2 Tantalum, Commercial Grade, 47 uF, 10%, 16 VDC, Lead Spacing = 10mm

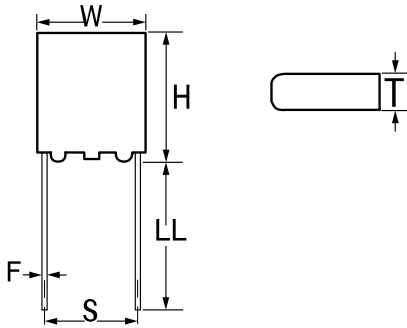

Dimensions	
W	12.3mm MAX
H	10.5mm MAX
T	7.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm

Packaging Specifications	
Packaging:	Bulk, Bag
Packaging Quantity:	100

General Information	
Series:	T340
Dielectric:	MnO2 Tantalum
Style:	Radial Molded
Description:	Radial, Solid Tantalum, Molded
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Lead (SnPb)
Construction:	Molded
Miscellaneous:	Includes Standoff Height of 0.38 +/- 0.13mm
Notes:	Longest Lead Is Positive

Specifications	
Capacitance:	47 uF
Capacitance Tolerance:	10%
Voltage DC:	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range:	-55/+125C
Dissipation Factor:	6.00%
Leakage Current:	7 uA

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)