


KJN SFTY X1-440 Y1-250, Ceramic, 3300 pF, 20%, 440 VAC (X1), 250 VAC (Y1), Y5U, Lead Spacing = 10mm

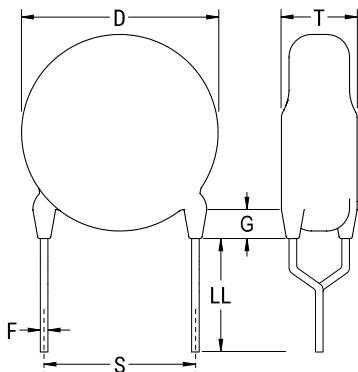

Dimensions	
D	14mm MAX
T	6.5mm MAX
S	10mm MAX
F	0.6mm +/-0.1mm

Packaging Specifications	
Packaging:	T&R, 360mm, H0 = 16mm, Component Pitch = 25.4mm
Packaging Quantity:	500

General Information	
Series:	KJN SFTY X1-440 Y1-250
Style:	Radial Disc
RoHS:	Yes
Termination:	Tin
Failure Rate:	N/A
Qualifications:	ENEC, cUL, CQC, VDE

Specifications	
Capacitance:	3300 pF
Capacitance Tolerance:	20%
Voltage AC:	440 VAC (X1), 250 VAC (Y1)
Dielectric Withstanding Voltage:	4000 VDC
Temperature Range:	-25/+85C
Temperature Coefficient:	Y5U
Dissipation Factor:	2.50%
Insulation Resistance:	10 GOhms
Safety Class:	X1/Y1

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)