


KJN SFTY X1-440 Y1-400, Ceramic, 470 pF, 10%, 440 VAC (X1), 400 VAC (Y1), Y5P, Lead Spacing = 12.5mm

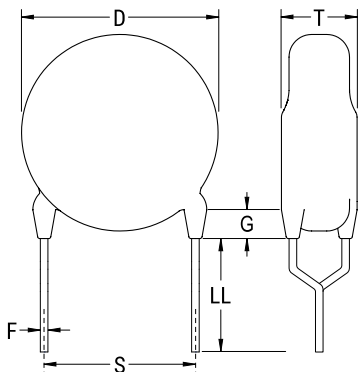

Dimensions	
D	10mm MAX
T	8mm MAX
S	12.5mm MAX
LL	25mm +/-1mm
F	0.6mm +/-0.1mm

Packaging Specifications	
Packaging:	Bulk, Bag

General Information	
Series:	KJN SFTY X1-440 Y1-400
Style:	Radial Disc
RoHS:	Yes
Termination:	Tin
Failure Rate:	N/A
Qualifications:	ENEC, cUL, CQC, VDE

Specifications	
Capacitance:	470 pF
Capacitance Tolerance:	10%
Voltage AC:	440 VAC (X1), 400 VAC (Y1)
Dielectric Withstanding Voltage:	4000 VDC
Temperature Range:	-25/+85C
Temperature Coefficient:	Y5P
Dissipation Factor:	2.5%
Insulation Resistance:	10 GOhms
Safety Class:	X1/Y1

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)