


KEMET Part Number: MMK5104J100J01L3ABULK
(F601JF104J100CL30A)

MMK/F601, Film, Metallized Polyester, General Purpose, 0.1 uF, 5%, 100 VDC, 85°C, Lead Spacing = 5mm

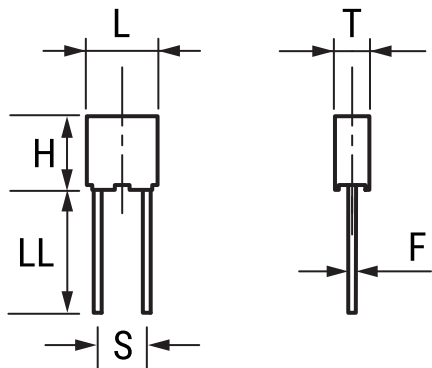

General Information	
Series:	MMK/F601
Dielectric:	Metallized Polyester
Style:	Radial
Features:	DC Multipurpose Applications
RoHS:	Yes
Lead:	Wire Leads
Notes:	Not For New Design, Please Check Possible Alternative Parts (AltPart)

Dimensions	
L	7.2mm MAX
H	6.5mm MAX
T	2.5mm MAX
S	5mm +/-0.4mm
LL	3mm NOM
F	0.5mm NOM

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	5%
Voltage AC:	63 VAC
Voltage DC:	100 VDC, 77.5 VDC (100C)
Temperature Range:	-55/+100C
Rated Temperature:	85°C
Insulation Resistance:	15 GOhms
Max dV/dt:	30 V/us

Packaging Specifications	
Packaging:	Bulk, Bag

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)