

# MP16F/10S

頭部釋義:F/平面 T/斜面 C/凹凸 H/高頭 B/球面

E/環形燈 D/中心燈 △/電壓 ▲/顏色

安裝孔尺寸:16mm

電壓等級:250V/AC


額定電流:3A

燈珠顏色: **R** **G** **Y** **O** **B** **W**

外殼材料:N/黃銅鍍鉻 A/鋅合金鍍鉻 S/不銹鋼  
P/塑料

防護等級:IP67

接線方式:J/焊接式 10/接線柱

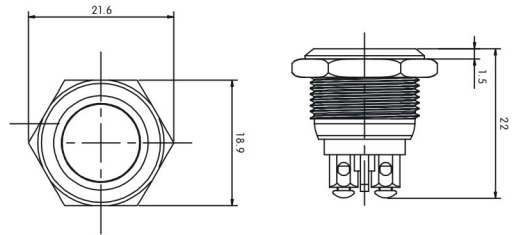

產品規格	Sepecification	MP16F/10S
保護等級	Degree of Protection	IP67
觸點類型	Contact Type	1 NO/1NC 可定制
最大電壓	Maximum Voltage	250V/AC
熱流	Thermal Current	3A
最小負載	Minimum Applicable Load	5V AC/DC, 1mA
觸點材料	Contact material	純銀合金Silver plated
端子形式	Terminal Style	.110" Solder/ Quick Connect
運行溫度	Operating Temperature	-25°C to +65°C
操作濕度	Operating Humidity	45 to 85% RH
接觸電阻	Contact Resistance	5mΩ maximum
絕緣電阻	Insulation Resistance	1000MΩ minimum (500V DC megger)
震蕩電阻	Vibration Resistance	10 to 55Hz, amplitude 1.2mm p-p
保護等級	Degree of Protection	>10g
電氣壽命	Electrical Life	200,000 operations minimum (at full rated load)
機械壽命	Mechanical Life	Maintained: 1000000 Momentary: 1000000 Selector/Keylock: 250000
耐壓	Dielectrical Life	Illumination Unit: 2,000V AC, 1 min. Between live part/ground
錫焊溫度	Soldering Temperature	300°C/3 seconds

单击下面可查看定价，库存，交付和生命周期等信息

[>>SEED STUDIO\(矽递科技\)](#)