

● Feature 特性

- ★TJ21 SMD2016 4pin贴片晶振、晶体谐振器
- ★满足无铅焊接的回流温度曲线要求
- ★高精度、高频率稳定性、可靠性
- ★降低电磁干扰 (EMI) 影响
- ★优良的耐环境特性, 可达工业级温度
- ★包装: 编带卷装, 3000pcs/卷




●Electrical specifications 电气参数



| 型号     | Holder Type                    | TJ21 SMD2016                |
|--------|--------------------------------|-----------------------------|
| 频率范围   | Frequency Toleranc (ΔF) at25°C | 16.0MHz~66.0MHz (Fund)      |
| 温度频差   | Frequency rift                 | ±10ppm ±20ppm               |
| 工作温度范围 | Operating Temperature Range    | -20°C~+70°C to -40°C~+85°C  |
| 储存温度范围 | Storage Temperature Range      | -20°C~+60°C to -55°C~+125°C |
| 老化     | Aging 25°C                     | ±3ppm/year Maximum          |
| 静电容    | Shunt Capacitance (C0)         | 7pf Maxmum                  |
| 激励功率   | Drive Level                    | 10uw~50uw Typical           |
| 绝缘阻抗   | Insulaton Resistance           | 500Mohms at DC 100V         |
| 负载电容   | Load Capacitance (CL)          | 6pf~15pf or specify         |

●Mechanical Dimensions 外型尺寸

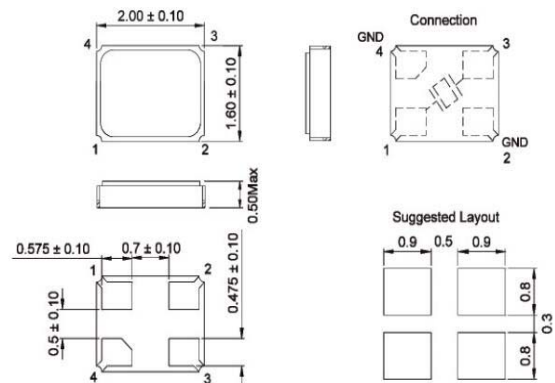


●Equivalent Series Resistance and Mode of Operation  
等效电阻和振荡模式

| Frequency Range 频率范围 | ESR (ohm) 等效阻抗 | Mode 振荡模式   |
|----------------------|----------------|-------------|
| 16.000-18.000 MHz    | 80Max          | Fundamental |
| 18.000-25.000 MHz    | 60Max          | Fundamental |
| 25.000-30.000 MHz    | 40Max          | Fundamental |
| 30.000-66.000 MHz    | 30Max          | Fundamental |

●Reflow condition 回流焊条件



●Frequency VS. Temperature Curve

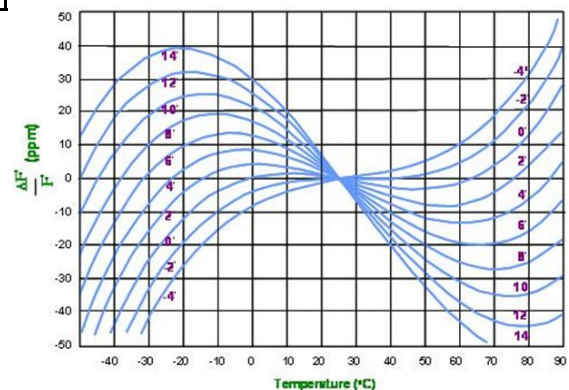

单击下面可查看定价，库存，交付和生命周期等信息

[>>JYJE\(晶友嘉\)](#)