

**Power PCB Relay T9V OBC**

- 1 pole 40A, 1 form A (NO) contact
- Contact gap >1.8mm (suffix S)
- 350mW hold power<sup>1)</sup>
- Ambient temperature up to 85°C at 35A, 105°C at 32A
- The appliance is able to meet VDE V 0126-1-1
- Product in accordance to IEC 60335-1
- EN61095: AC7a at 85°C



f0156\_bc\_inv



Typical applications  
On board charger  
Electrical vehicle loading stations  
Electrical vehicle  
Photovoltaic inverter

**Approvals**

VDE 40030974, UL E58304, CQC16002145203, TUV R50369970  
Technical data of approved types on request

**Contact Data**

Contact arrangement	1 form A (NO)
Contact gap	>1.8mm
Rated voltage	277VAC (1.8mm gap)
Rated current	40A <sup>2)</sup>
Breaking capacity max.	10 000 VA
Contact material	AgNi
Initial contact resistance	75mΩ max. at 1A 6VDC or 3mΩ max. at 40A
Frequency of operation, with/without load	6/300min <sup>-1</sup>
Operate/release time max., incl bounce time	18/15ms

**Contact ratings<sup>3)</sup>**

Type	Contact	Load	Cycles
<b>IEC 61810</b>			
T9VV1K15-12S	A (NO)	35A, 250VAC, cosφ=1, 85°C	20x10 <sup>3</sup>
<b>UL 508</b>			
T9VV1K15-12S	A (NO)	35A, 250VAC, resistive, 85°C	20x10 <sup>3</sup>
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 <sup>3</sup>
<b>CQC</b>			
T9VV1K15-12S	A (NO)	40A, 250VAC, resistive, 60°C	20x10 <sup>3</sup>
<b>TUV</b>			
T9VV1K15-12S	A (NO)	40A, 30VDC, resistive, 70°C	60x10 <sup>3</sup>
<b>Internal Test</b>			
T9VV1K15-12S	A (NO)	32A, 250VAC, cosφ=1, 105°C	30x10 <sup>3</sup>

Mechanical endurance, DC coil 5x10<sup>5</sup> operations

**Coil Data**

Rated coil voltage	12VDC
Coil insulation system according UL	class F

**Coil versions, DC coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power W
12	see note <sup>1)</sup>	9.6	0.8	64±10%	2.25 / min. 0.35 hold

All figures are given for coil without pre-energization, at ambient temperature +23°C.  
Other coil voltages on request.

**Insulation Data**

Initial dielectric strength	
between open contacts	2500V <sub>rms</sub>
between contact and coil	4000V <sub>rms</sub>
Initial surge withstand voltage	
between contact and coil	6kV
Clearance/creepage	
between contact and coil	3/4mm
Initial insulation resistance	
between open contacts	1x10 <sup>9</sup> Ω
between contact and coil	1x10 <sup>9</sup> Ω
Material group of insulation parts	III
Tracking index of relay base	PTI 325

**Other Data**


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)

Ambient temperature	-40 ~ 85°C/105°C
Cold storage <sup>4)</sup>	240h, -40°C
Dry heat <sup>4)</sup>	240h, +105°C
Temperature cycling (Shock) <sup>4)</sup>	1000cycles, -40/+105°C
Operational Life <sup>4)</sup>	1000hrs, 32A, +105°C
Category of environmental protection	
IEC 61810	RTII – flux proof
Vibration resistance (functional) <sup>4)</sup>	10-40Hz 1.27mm 40-70Hz 5g 70-100Hz 0.5mm 100-500Hz 10g
Shock resistance (functional) <sup>4)</sup>	11ms, up to 30g
Shock resistance (destructive)	
IEC 60068-2-27	100g
Terminal Strength (Leaded) <sup>4)</sup>	1.13Kg
Terminal type	PCB-THT
Mounting	see note <sup>2)</sup>
Mounting distance	≥10mm
Weight	appr. 30g
Resistance to soldering heat THT <sup>4)</sup>	Tb, method 1A, hot dip 10s, 260°C with thermal screen
Packaging unit	box/500 pcs.

- 1) Rated voltage: 12VDC. After the energization time of 100ms with 12 VDC the coil requires a reduction of the coil voltage to 4.7...6.0 VDC.
- 2) The relay connections and wiring have to be designed with an adequate cross sections to ensure the current flow and heat dissipation.
- 3) Contact ratings with relay properly vented.
- 4) Refer to AEC-Q200.



**Power PCB Relay T9V OBC** (Continued)

**Dimensions**

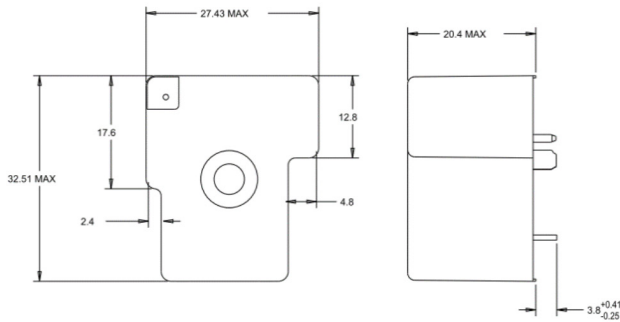

**PCB layout / terminal assignment**

Bottom view on solder pins

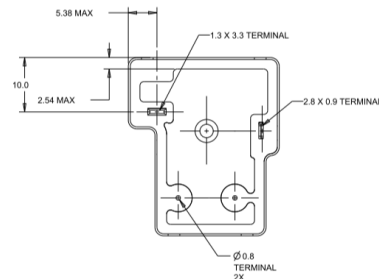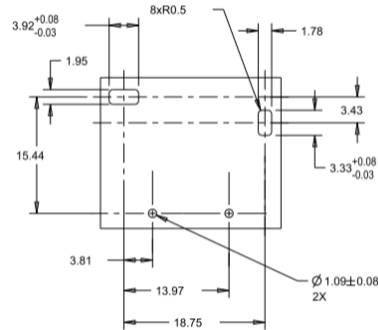

WIRING DIAGRAM (BOTTOM VIEW)



**Notes**

**1) General tolerance**

Diagram Dimension	Tolerance
< 1 mm	±0.1
1 ~ 3 mm	±0.2
> 3 mm	±0.3

**2) Dimensions of the pins after tin soldering**

- a) +0.4 for the width and the thickness
- b) +1.0 for the length

**Product code structure**

Typical product code **T9V V 1 K 1 5 -12 S**

**Type**

**T9V** Power Relay T9V Series

**Enclosure**

**V** Flux-proof plastic case      **S** Wash tight

**Contact arrangement**

**1** 1 Form A (1NO)

**Coil input**

**K** DC coil, 2.25W

**Mounting and termination**

**1** PCB mounting; PCB terminals for coil and contacts

**Contact material**

**5** AgNi

**Coil voltage**

**Coil code:** Please refer to coil version table

**Contact gap**

**blank** 1.5mm contact gap      **S** 1.8mm contact gap

Product code	Version	Contact arrangement	Contact material	Contact gap	Coil	Part Number
T9V1K15-12S	PCB, flux tight	1 form A (NO) contact	AgNi	>1.8mm	12VDC	2027395-5

Note. This list represents the most common types and does not show all variants covered by this datasheet, other types on request.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)