



Rack & Panel

SLE - SME - SRE Series


Sub Miniature / High Density Rectangular / .025" Dia. / 3 Amps .030" Dia. / 5 Amps / .040" Dia. / 7.5 Amps



SLE
.025 Diameter Contacts —
3 Amps.



SRE
.030 Diameter Contacts — 5 Amps

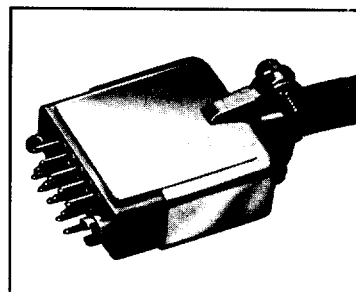

SME
.040 Diameter Contacts — 7.5 Amps

Within this series, you'll find a standard size connector for which you can select one of three current ratings: 3, 5 or 7.5 amps. Compact and lightweight, they are especially suited for

aircraft, instrumentation and portable equipment applications.

Right angle, dip solder, pin or socket contacts are available. Consult factory.

SPECIFICATIONS

Current Rating: SLE - 3 amps; SRE - 5 amps;
SME - 7.5 amps.

No. of Contacts: 4, 5, 7, 9, 11, 14, 20, 26, 29,
34, 44, 50.

Pin Contacts: Brass, gold plated except for
SLE which is phosphor
bronze, gold plated.

Socket Contacts: Phosphor bronze, gold plated.

Termination Types: .037 diameter solder cup will
accept up to #22 AWG
stranded wire. Solder cup
adaptor (Part No. S45) will
accept up to #20 AWG
stranded wire. Dip solder
terminations available for SRE
Series, .030 Dia. Check
Sales Department for
available lengths.

Military versions of SRE are
QPL'd to M28748/7 and
M28748/8.

Electrical Data: The dielectric withstanding
voltage is one minute
electrification at 1000 VAC.

Dielectric: Green glass-filled diallyl
phthalate per MIL-M-14,
SDG-F.

Guides: Type NSS stainless steel,
passivated or Type N Brass,
gold plated.

Jackscrews: Stainless steel, passivated.
Aluminum knobs on the
jackscrews are equipped with
set screws, except JTU
jackscrews which have
stainless steel knobs
equipped with groove pins.

Hoods: Anodized aluminum. May be
applied to either plug or
receptacle. Both top and side
openings are available
for use with either guides
or jackscrews.

Rack & Panel


SLE - SME - SRE Series

**Sub Miniature / High Density Rectangular / .025" Dia. / 3 Amps
.030" Dia. / 5 Amps / .040" Dia. / 7.5 Amps**

CONTACT ARRANGEMENT

Mating Face of Female Moldings - Male Moldings Reverse Image

Dimensions are for reference only and are subject to change. Outline drawings on request.

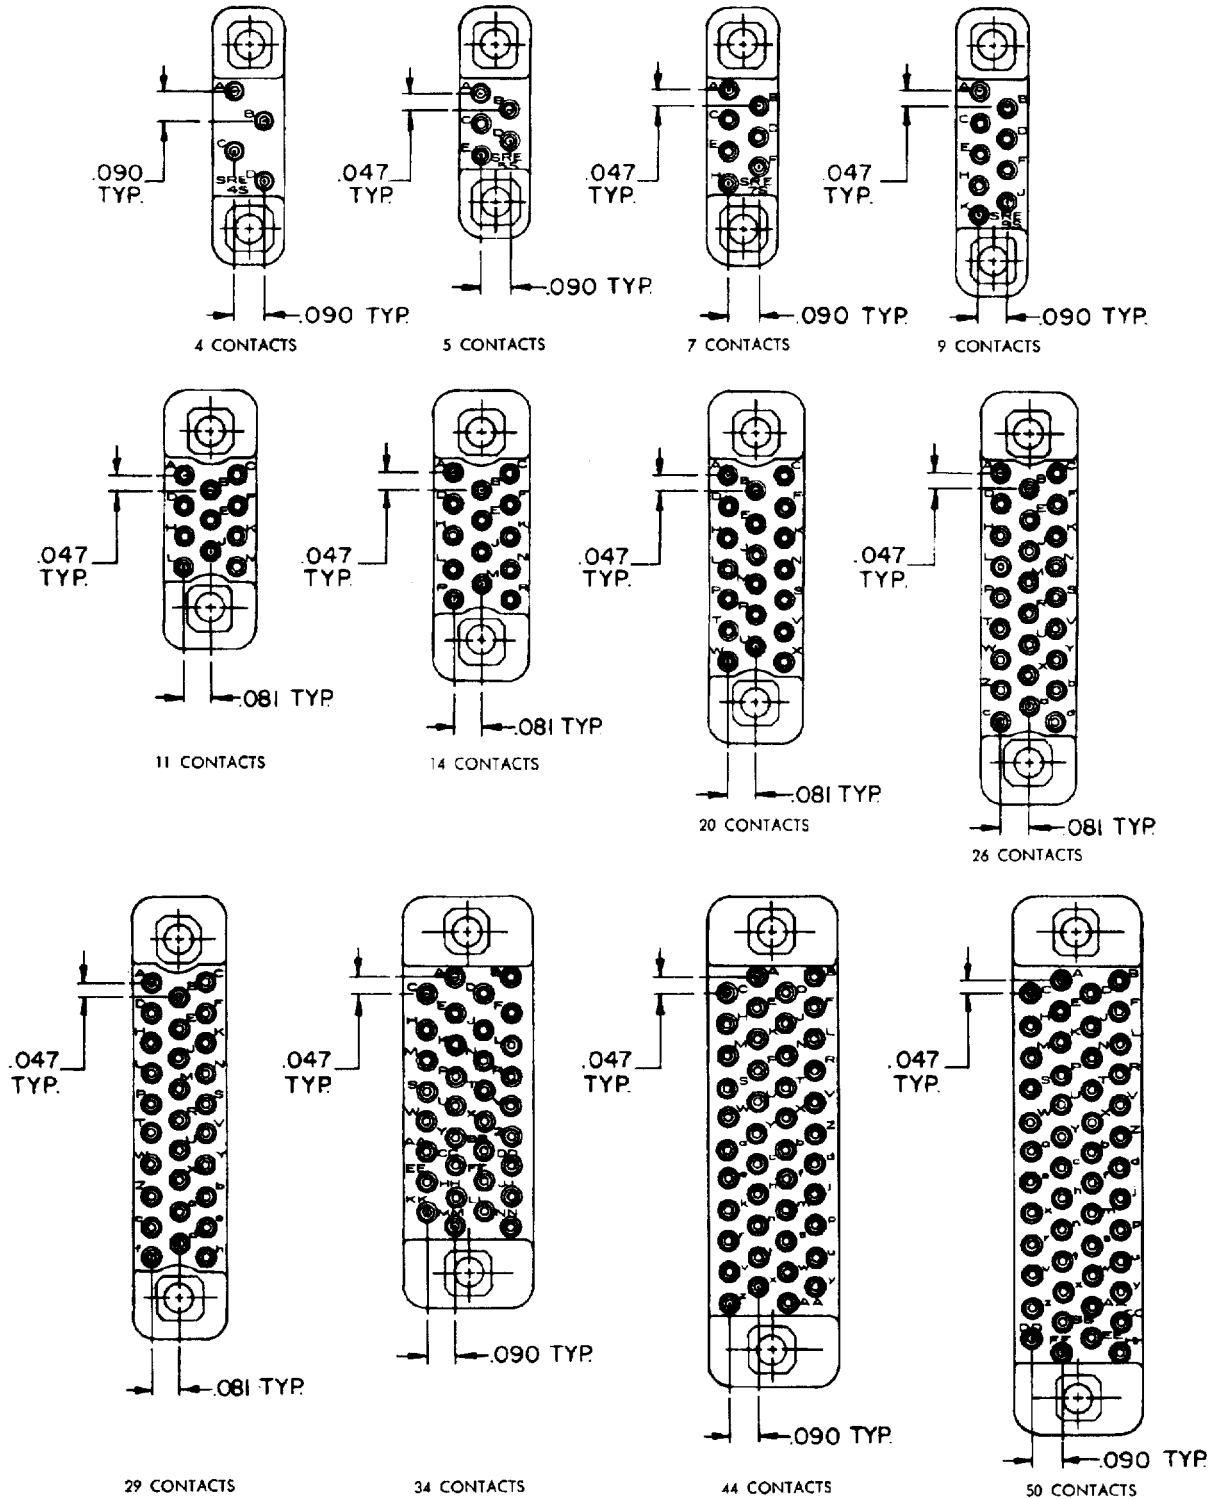

Winchester Electronics

400 Park Road ■ Watertown, Connecticut 06795-0500 ■ Phone: (860) 945-5000 ■ FAX: (860) 945-5191 ■ Internet: <http://www.litton-wed.com>


Rack & Panel

SLE - SME - SRE Series

Sub Miniature / High Density Rectangular / .025" Dia. / 3 Amps
 .030" Dia. / 5 Amps / .040" Dia. / 7.5 Amps

OUTLINE

Dimensions are for reference only and are subject to change. Outline drawings on request.

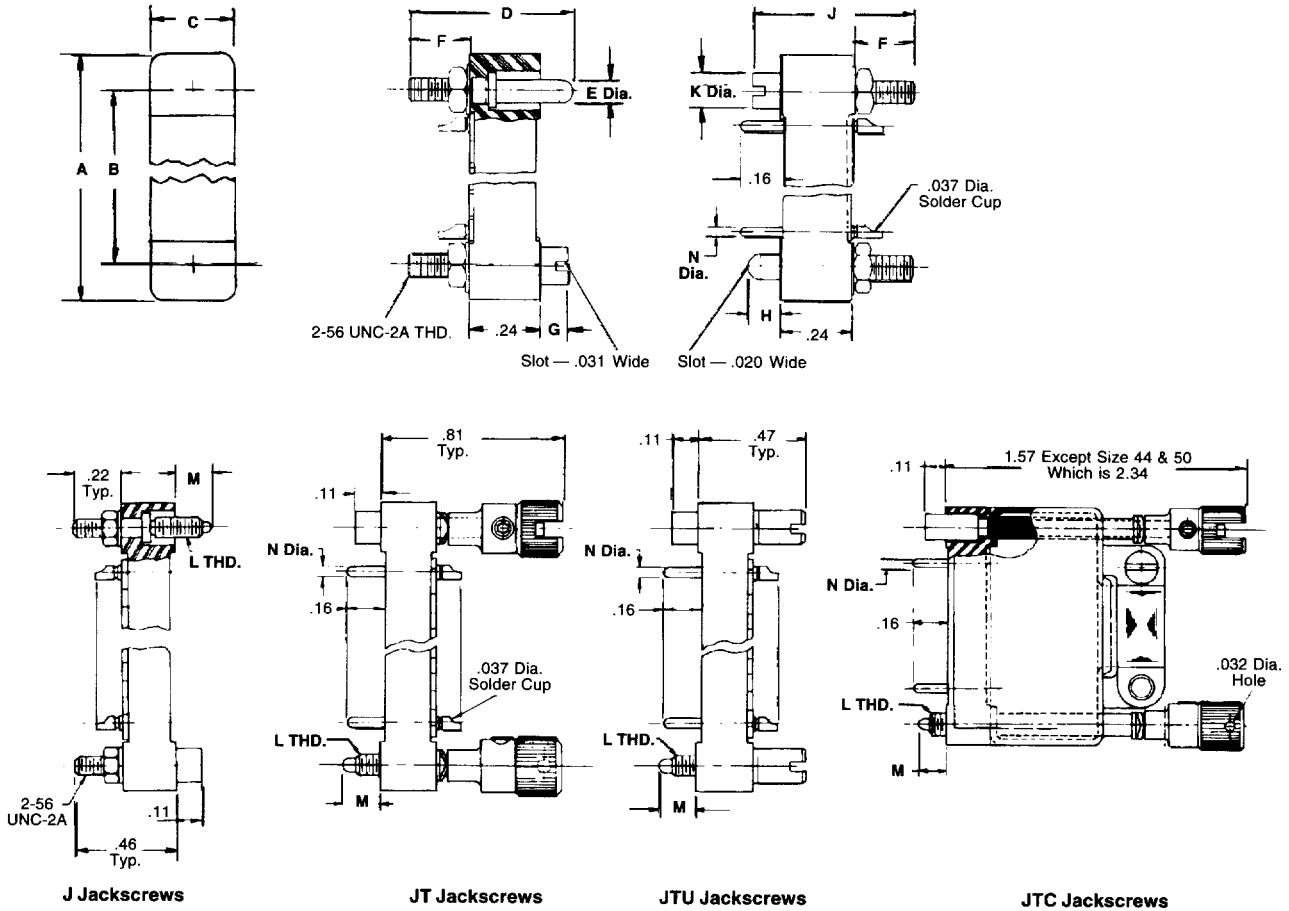

DIMENSIONS

The stainless steel guide pin and socket have good physical strength and are particularly desirable for mounting connectors which will be

subject to severe vibration in service, but not for electrical applications. Optional gold plated brass available for electrical applications.

No. of Contacts	A	B	C
4	.78	.562	.21
5	.70	.482	.21
7	.78	.562	.21
9	.88	.656	.21
11	.78	.531	.28
14	.88	.625	.28
20	1.06	.814	.28
26	1.25	1.000	.28
29	1.34	1.094	.28
34	1.25	1.032	.39
44	1.48	1.267	.39
50	1.63	1.408	.39

Series	D	E Dia	F	G	H	J	K	L Thd	M	N
SLE	.62	.08	.24	.10	.14	.59	.125	2-56 UNC	.15	.025
SRE	.57	.09	.22	.11	.12	.57	.137	3-48 UNC*	.12	.030
SME	.62	.08	.24	.10	.14	.59	.125	2-56 UNC	.15	.040

*2-56 UNC Thread also available.
 See ordering information for part number suffix.

Winchester Electronics

400 Park Road ■ Watertown, Connecticut 06795-0500 ■ Phone: (860) 945-5000 ■ FAX: (860) 945-5191 ■ Internet: <http://www.litton-wed.com>

Rack & Panel


SLE - SME - SRE Series

**Sub Miniature / High Density Rectangular / .025" Dia. / 3 Amps
.030" Dia. / 5 Amps / .040" Dia. / 7.5 Amps**

OUTLINE

Hoods Formed Aluminum

Dimensions are for reference only and are subject to change. Outline drawings on request.

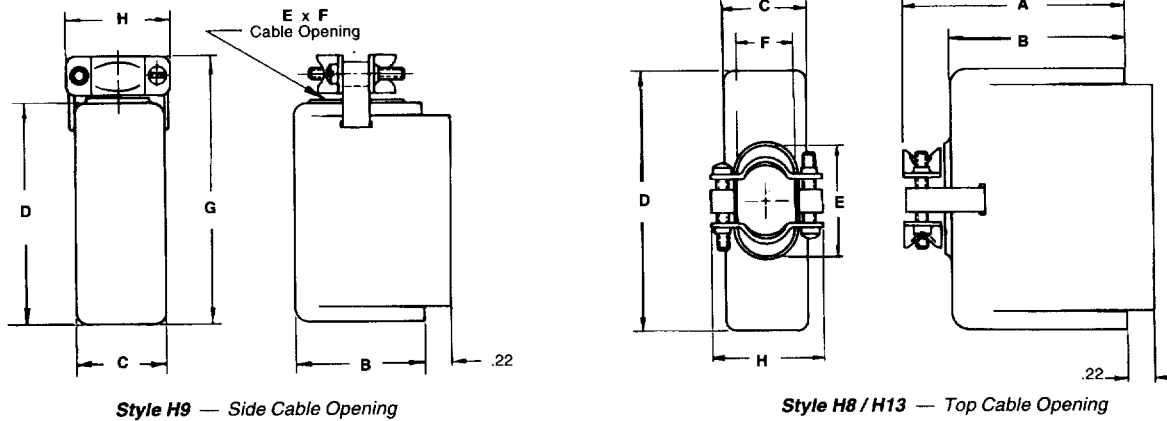

Style H9 — Side Cable Opening


Style H8 / H13 — Top Cable Opening

DIMENSIONS

Hood Style	Hood Catalog Number Guides Only*	Dimensions						Cable Opening		No. of Contacts
		A	B	C	D	G	H	E	F	
H8	SRE11H8	1.02	.72	.33	.78	—	.53	.28	.28	11
H8	SRE50H8	1.80	1.50	.45	1.63	—	.63	1.19	.38	50
H9	SRE11H9	—	.72	.33	.78	1.08	.53	.50	.22	11
H9	SRE50H9	—	1.50	.45	1.63	1.92	.63	1.19	.38	50
H13	SRE4&7H13	1.02	.75	.25	.78	—	.53	.22	.16	4 & 7
H13	SRE14H13	1.02	.75	.34	.88	—	.53	.25	.16	14
H13	SRE20H13	1.02	.75	.34	1.06	—	.53	.38	.25	20
H13	SRE26H13	1.02	.75	.34	1.25	—	.53	.41	.25	26
H13	SRE34H13	1.05	.75	.45	1.25	—	.63	.73	.38	34
NOT AVAILABLE										5
NOT AVAILABLE										9
H13	SRE29H13	1.02	.75	.34	1.34	—	.53	.41	.25	29
NOT AVAILABLE										44

* Add "J" to hood part number when used with fixed jackscrews
Add "JTC" to hood part number when used with long turning jackscrews.

ORDERING INFORMATION

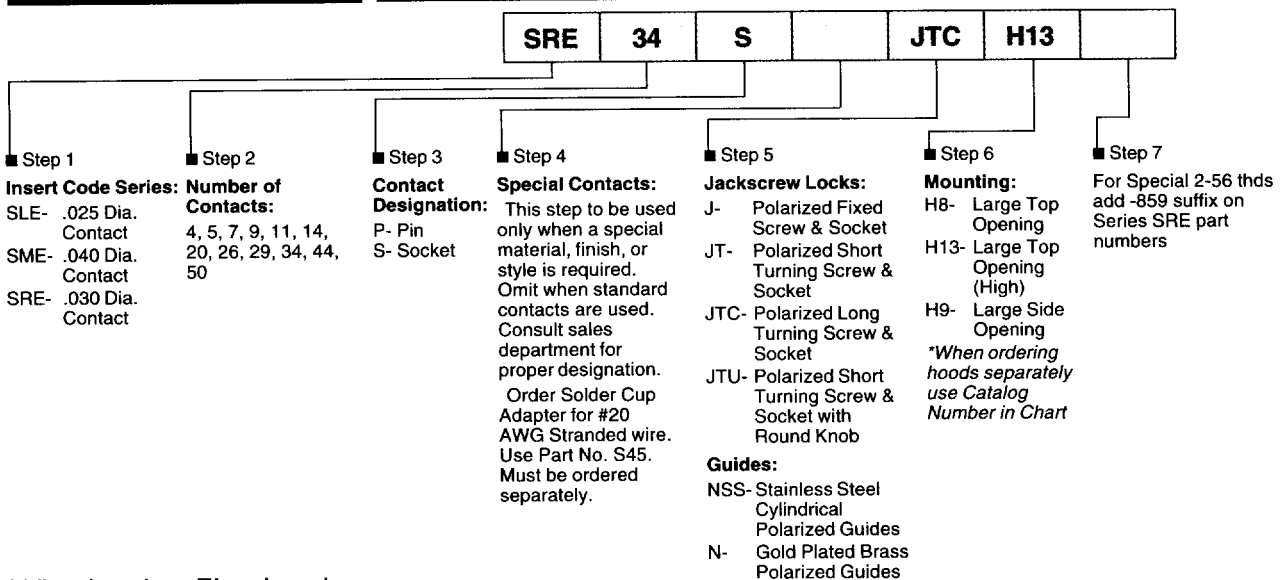

Winchester Electronics

400 Park Road ■ Watertown, Connecticut 06795-0500 ■ Phone: (860) 945-5000 ■ FAX: (860) 945-5191 ■ Internet: <http://www.liiton-wed.com>

单击下面可查看定价，库存，交付和生命周期等信息

[>>Infineon Technologies\(英飞凌\)](#)