


深圳市金航标电子有限公司

DIMENSIONS

SMA 外螺内针



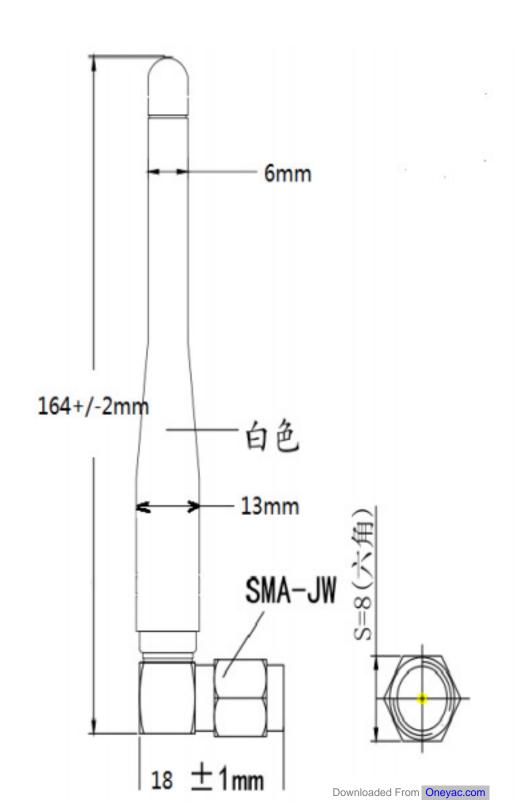


Kinghelm[®] 深圳市金航标电子有限公司

SPECIFICATIONS

Item		Specifications
Antenna	Frequency Range	2400~2500MHz
	Band Width	100MHz
	Polarization	Linear
	Gain	<2.5dBi
	V.S.W.R	<2.0
	Impendance	50Ω
	Connector	RP-SMA Male or others
Environmental	Operating Temperature	-35℃~+70℃
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

VSWR

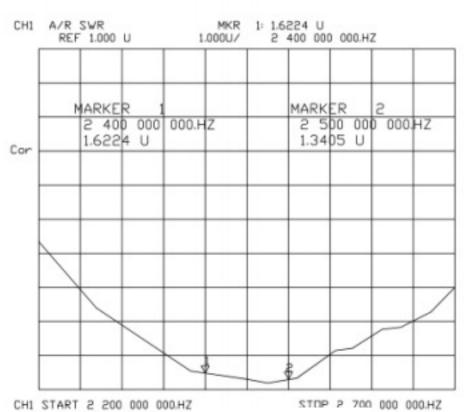


Downloaded From Oneyac.com



深圳市金航标电子有限公司

Radiation Pattern

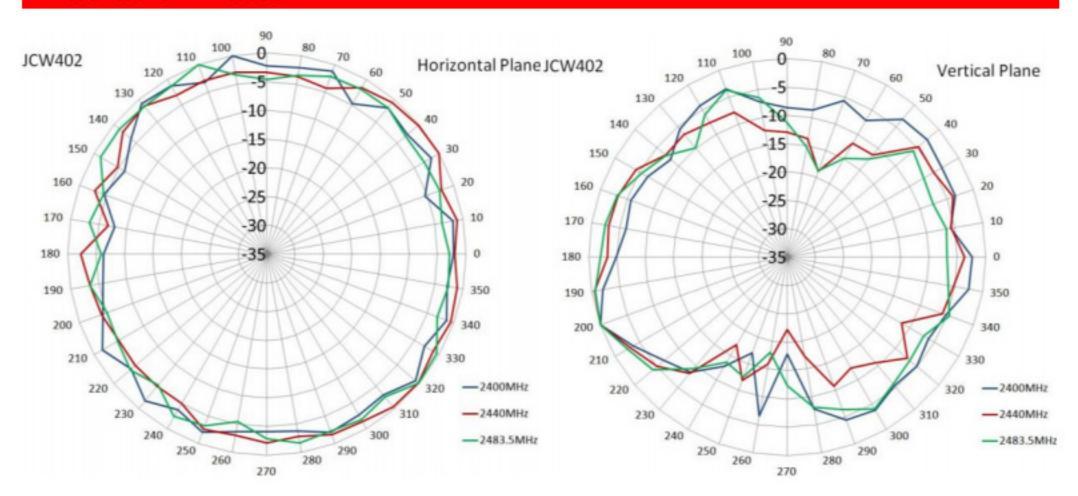

单击下面可查看定价,库存,交付和生命周期等信息

>>kinghelm(金航标)