


深圳市金航标电子有限公司

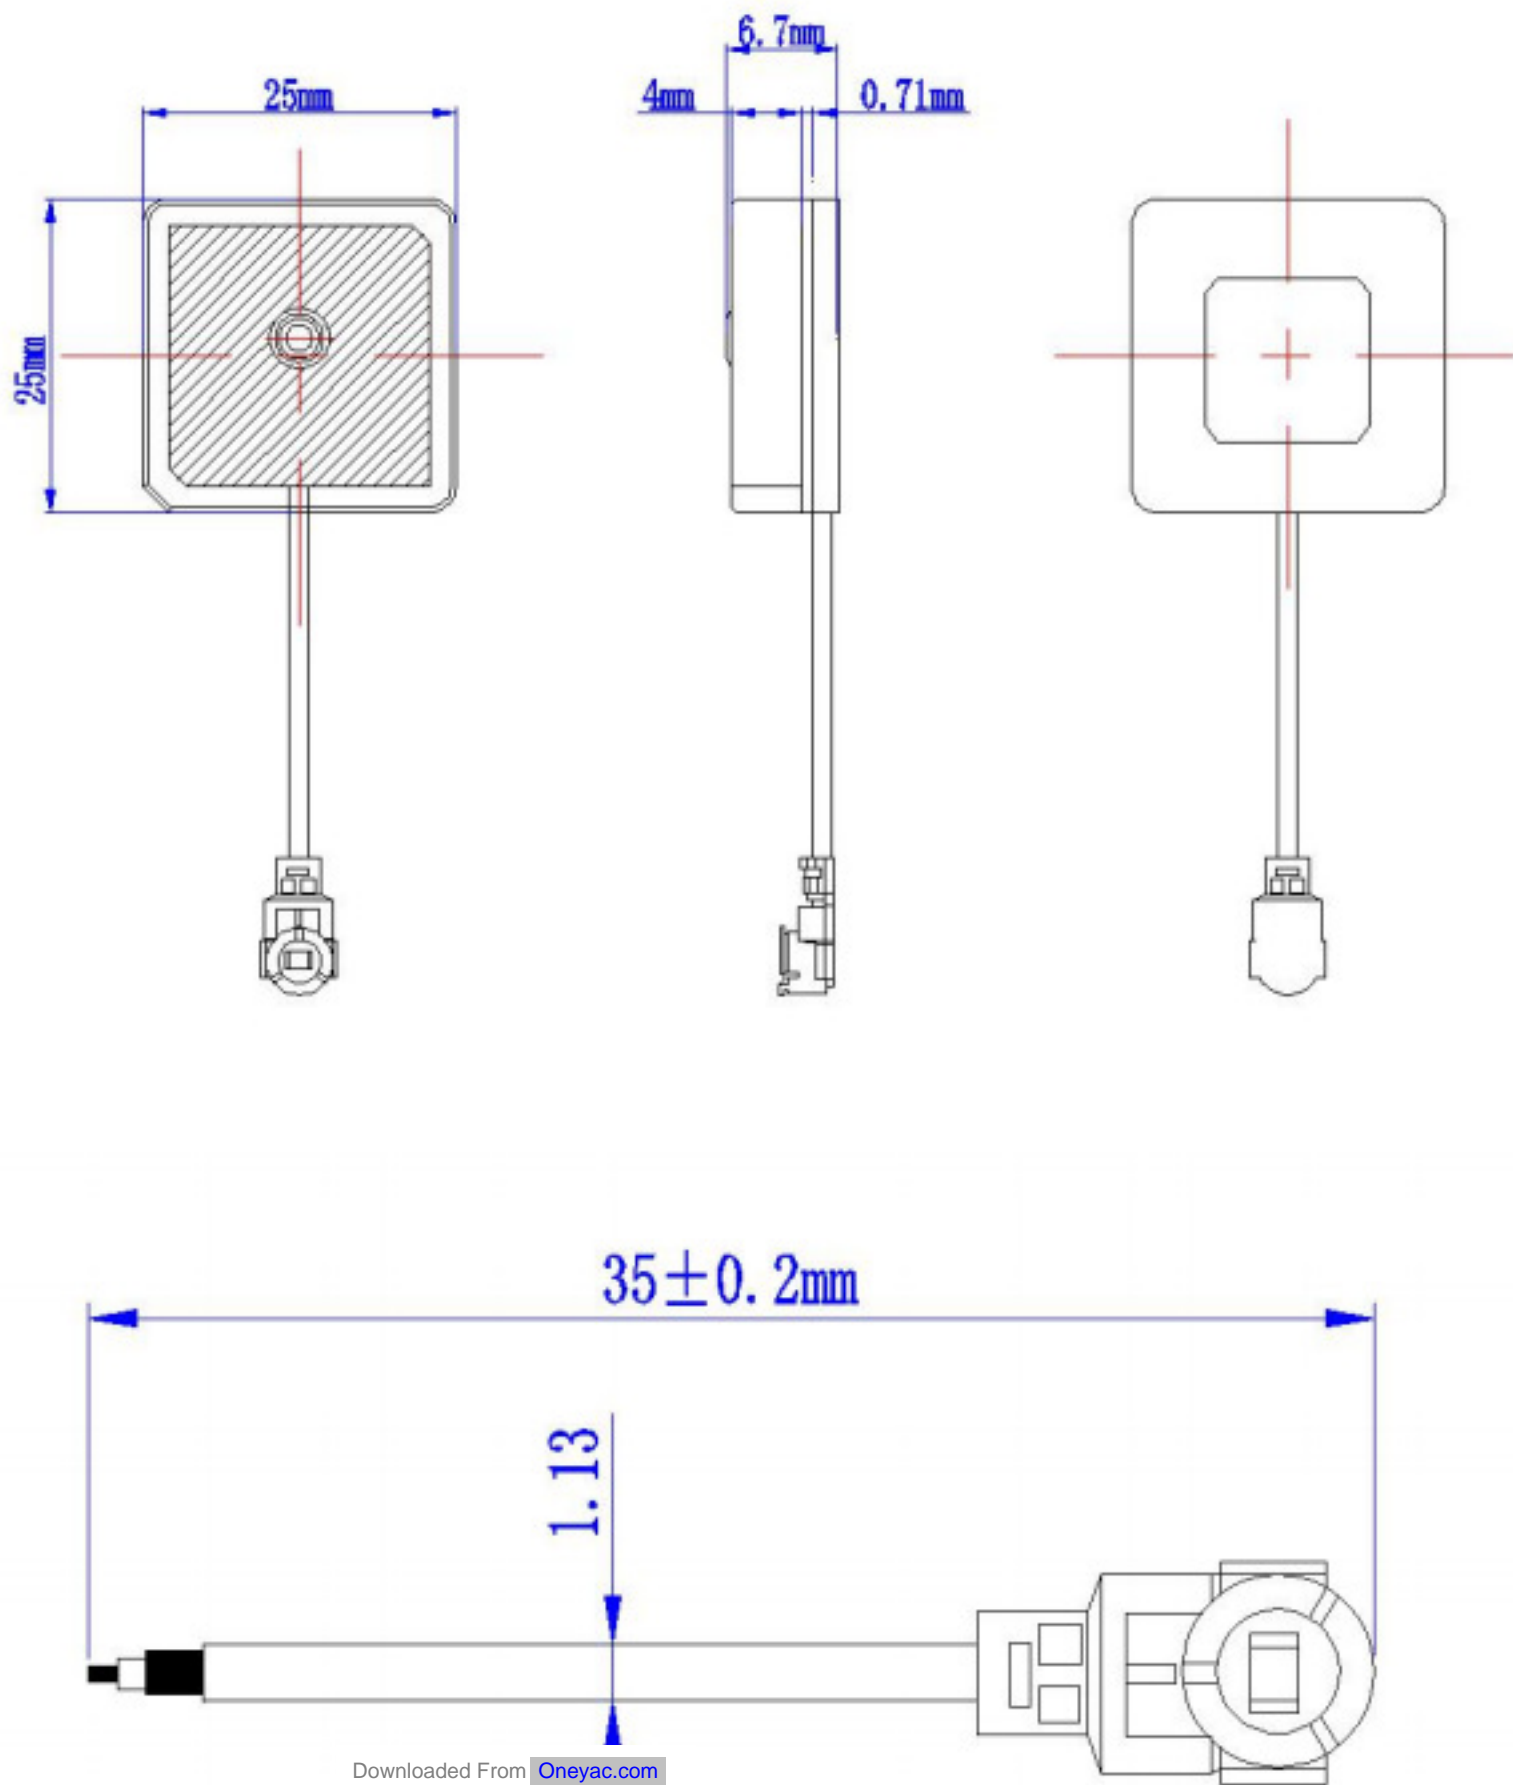


深圳市金航标电子有限公司

Dimensions	-	Weight	<10g
Connector	-	Cable	RF1.13/35MM
Color	-	PCB	25 *25*0.6
Voltage	3.3 V	Current	4.2mA
Operating Condition	Temperature: -40 to +85°C Humidity: 65±20%	Storage Condition	Temperature: -10 to +40°C Humidity: ≤70

2.2 Electrical Specification

Center Frequency	1575.42±1.023MHz(When covered with a radome on LNA ground Plane.)
Gain at Zenith	-
Output Impedance	50ohm
Output V.S.W.R	-.
Operation Voltage	-

深圳市金航标电子有限公司

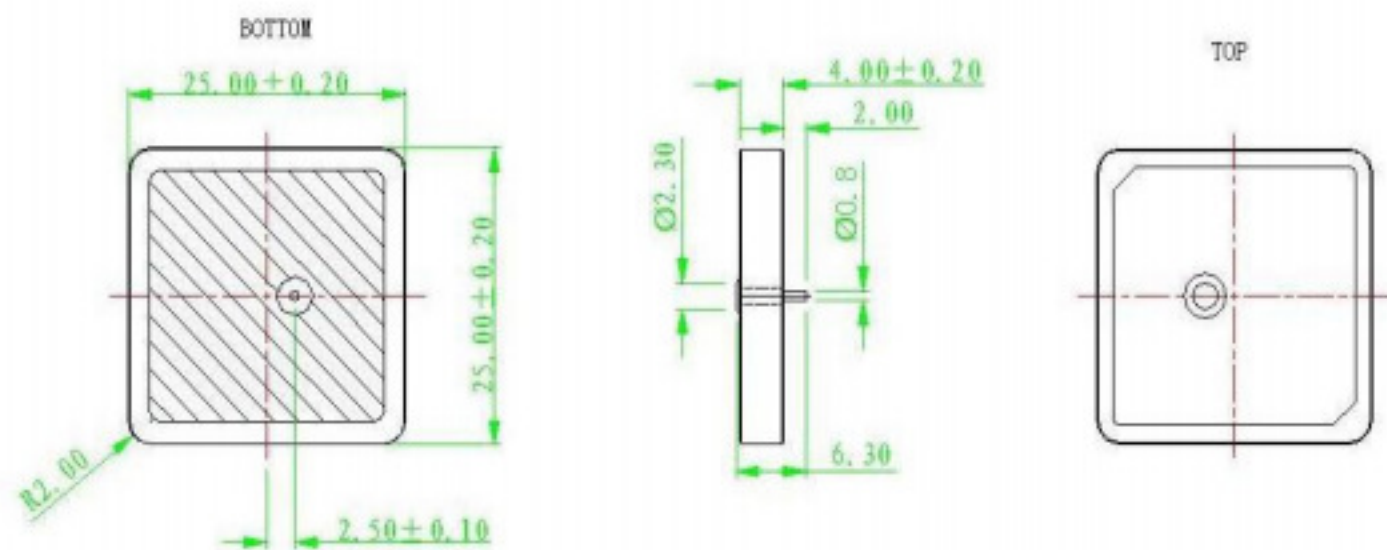

■ Specifications

No.	Item	Characteristics
1	Center Frequency	1575.42 \pm 3MHz
2	Bandwidth	8MHz min(Return loss \leq -10dB)
3	Gain at Zenith(dBic)	1.0typ
4	Polarization	R . H . C . P
5	Impedance(Ω)	50typ
6	Testing Conditions	40mm Square Ground Plane

- 1) 工作温度和操作温度(无包装单品): -40℃~+85℃;
- 2) 储存环境(包装品): -10℃~+40℃, RH 70% (最大)。

深圳市金航标电子有限公司



单击下面可查看定价，库存，交付和生命周期等信息

[>>kinghelm\(金航标\)](#)