

## Thick Film Chip Resistors

Type: **ERJ XG, 1G, 2G, 3G, 6G, 8G, 14, 12, 12Z, 1T**




### Features

- Small size and lightweight
- High reliability  
Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines  
Taping packaging available
- Suitable for both reflow and flow soldering
- Reference Standards  
IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B
- AEC-Q200 qualified (Exemption ERJXG)
- RoHS compliant

**As for Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions,**  
Please see Data Files


### Explanation of Part Numbers

- ERJXGN, 1GN, 2GE, 3GE, 6GE, 8GE, 14, 12, 12Z, 1T Type,  $\pm 5\%$

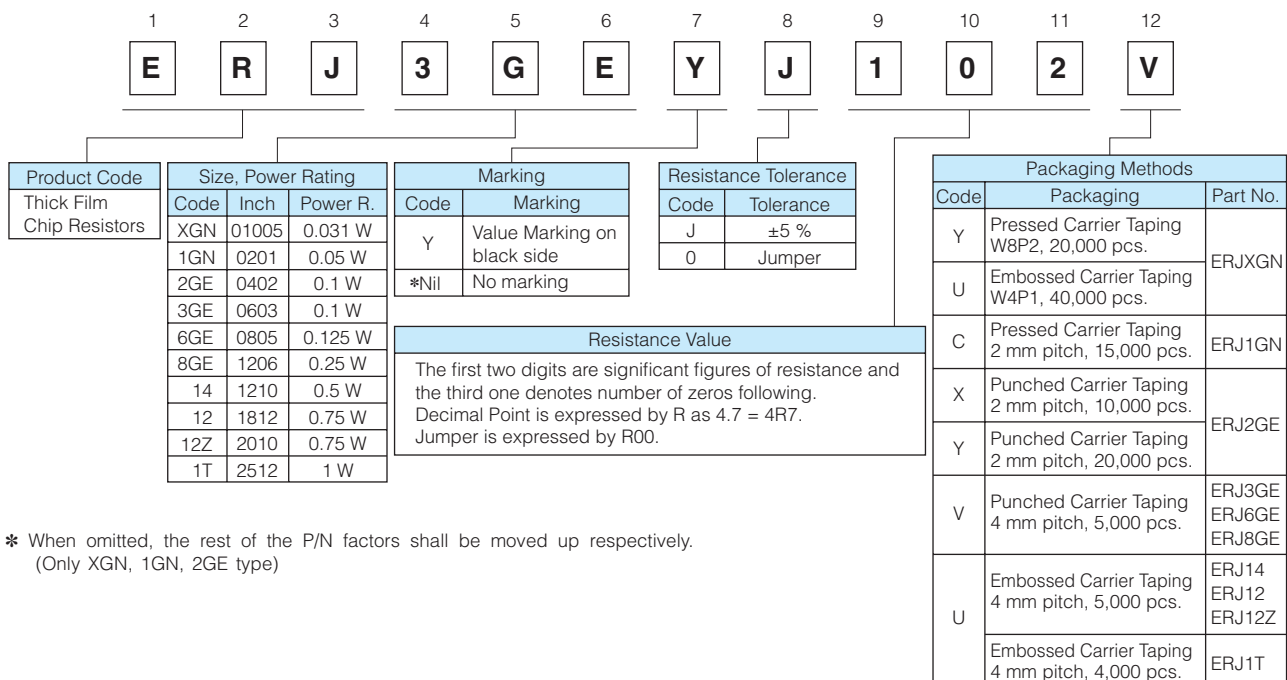


\* When omitted, the rest of the P/N factors shall be moved up respectively.  
(Only XGN, 1GN, 2GE type)

## Construction

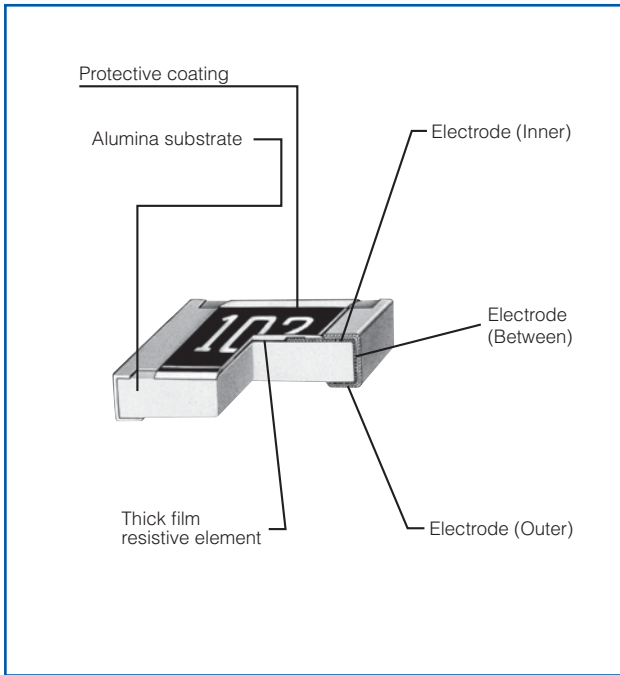

## Dimensions in mm (not to scale)

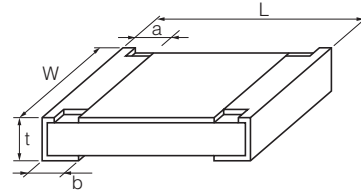

Part No. (inch size)	Dimensions (mm)					Mass (Weight) (g/1000 pcs.)
	L	W	a	b	t	
ERJXG (01005)	0.40 $\pm$ 0.02	0.20 $\pm$ 0.02	0.10 $\pm$ 0.03	0.10 $\pm$ 0.03	0.13 $\pm$ 0.02	0.04
ERJ1G (0201)	0.60 $\pm$ 0.03	0.30 $\pm$ 0.03	0.10 $\pm$ 0.05	0.15 $\pm$ 0.05	0.23 $\pm$ 0.03	0.15
ERJ2G (0402)	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 $\pm$ 0.05	0.35 $\pm$ 0.05	0.8
ERJ3G (0603)	1.60 $\pm$ 0.15	0.80 $\pm$ 0.15	0.30 $\pm$ 0.20	0.30 $\pm$ 0.15	0.45 $\pm$ 0.10	2
ERJ6G (0805)	2.00 $\pm$ 0.20	1.25 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20	0.60 $\pm$ 0.10	4
ERJ8G (1206)	3.20 $\pm$ 0.05	1.60 $\pm$ 0.05	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	10
ERJ14 (1210)	3.20 $\pm$ 0.20	2.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	16
ERJ12 (1812)	4.50 $\pm$ 0.20	3.20 $\pm$ 0.20	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	27
ERJ12Z (2010)	5.00 $\pm$ 0.20	2.50 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.10	27
ERJ1T (2512)	6.40 $\pm$ 0.20	3.20 $\pm$ 0.20	0.65 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.10	45

## Ratings

### [For Resistor]

Part No. (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage <sup>(1)</sup> (V)	Maximum Overload Voltage <sup>(2)</sup> (V)	Resistance Tolerance (%)	Resistance Range ( $\Omega$ )	T.C.R. ( $\times 10^{-6}/^{\circ}\text{C}$ )	Category Temperature Range ( $^{\circ}\text{C}$ )
ERJXG (01005)	0.031	15	30	$\pm 5$	4.7 to 1 M (E24)	<10 $\Omega$ : -100 to +600 10 $\Omega$ to 100 $\Omega$ : $\pm 300$ 100 $\Omega$ <: $\pm 200$	-55 to +125
ERJ1G (0201)	0.05	25	50	$\pm 5$	1 to 10 M (E24)	<10 $\Omega$ : -100 to +600	-55 to +125
ERJ2G (0402)	0.1	50	100	$\pm 5$	1 to 10 M (E24)		-55 to +155
ERJ3G (0603)	0.1	75	150	$\pm 5$	1 to 10 M (E24)	10 $\Omega$ to 1 M $\Omega$ : $\pm 200$	-55 to +155
ERJ6G (0805)	0.125	150	200	$\pm 5$	1 to 10 M (E24)		-55 to +155
ERJ8G (1206)	0.25	200	400	$\pm 5$	1 to 10 M (E24)		-55 to +155
ERJ14 (1210)	0.5	200	400	$\pm 5$	1 to 10 M (E24)	1 M $\Omega$ <: -400 to +150	-55 to +155
ERJ12 (1812)	0.75	200	500	$\pm 5$	1 to 10 M (E24)		-55 to +155
ERJ12Z (2010)	0.75	200	500	$\pm 5$	1 to 10 M (E24)	-400 to +150	-55 to +155
ERJ1T (2512)	1	200	500	$\pm 5$	1 to 1 M (E24)		-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from  $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$ , or Limiting Element Voltage listed above, whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from  $\text{SOTV} = 2.5$  (Only ERJ2G=2.0)  $\times$  RCWV or max. Overload Voltage listed above whichever less.

### [For Jumper]

Part No. (inch size)	Rated Current (A)	Maximum Overload Current (A)
ERJXG (01005)	0.5	1
ERJ1G (0201)		
ERJ2G (0402)		
ERJ3G (0603)	1	2
ERJ6G (0805)		
ERJ8G (1206)		
ERJ14 (1210)	2	4
ERJ12 (1812)		
ERJ12Z (2010)		
ERJ1T (2512)		

### Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

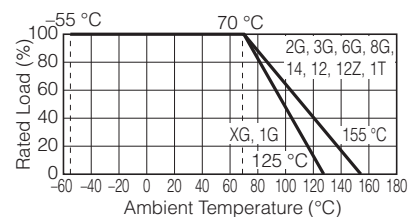

单击下面可查看定价，库存，交付和生命周期等信息

[>>Panasonic\(松下\)](#)