


DIP SWITCH NDA SERIES

Right Angle Type

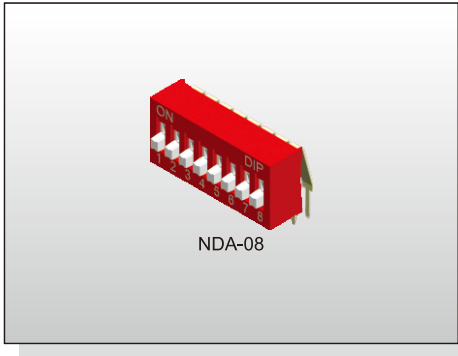

FEATURES

- ✘ Side actuation
- ✘ Gold contact for high reliability
- ✘ Red, blue, and black color options.


APPLICATION

- ✘ Industrial control
- ✘ Computers and peripherals
- ✘ Variety of function controls

SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 25mA, 24V DC |
| Contact Resistance | 50mΩ max. |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength | 500V AC/1 minute |
| Operating Force | 1,000gf max. |
| Travel | 2mm |
| Operating Life | 2,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

CIRCUIT

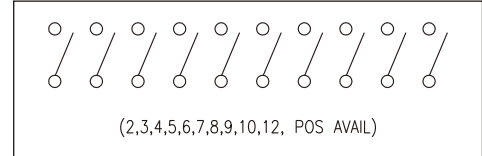


PACKAGE

<Tube>




| | |
|---------------|-----------------|
| NDA-02: 73pcs | NDA-02T: 70 pcs |
| NDA-03: 52pcs | NDA-03T: 50 pcs |
| NDA-04: 40pcs | NDA-04T: 39 pcs |
| NDA-05: 33pcs | NDA-05T: 32 pcs |
| NDA-06: 28pcs | NDA-06T: 28 pcs |
| NDA-07: 24pcs | NDA-07T: 24 pcs |
| NDA-08: 21pcs | NDA-08T: 21 pcs |
| NDA-09: 19pcs | NDA-09T: 19 pcs |
| NDA-10: 17pcs | NDA-10T: 17 pcs |
| NDA-12: 14pcs | NDA-12T: 14 pcs |

DIP SWITCH


HOW TO ORDER

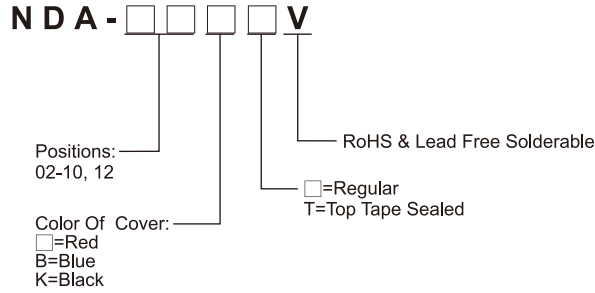

NDA

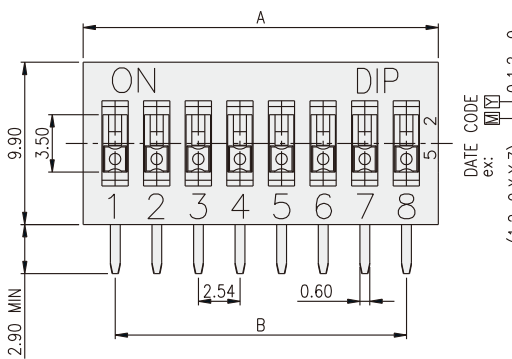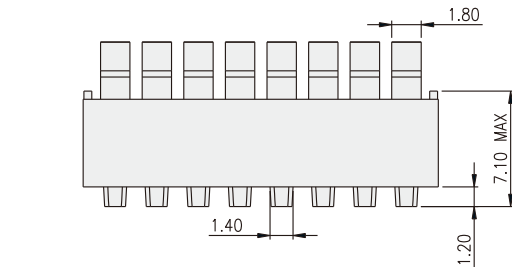

| PART NO. | NO. OF POS. | DIM.A | DIM.B |
|----------|-------------|-------|-------|
| NDA-02 | 2 | 6.44 | 2.54 |
| NDA-03 | 3 | 8.98 | 5.08 |
| NDA-04 | 4 | 11.52 | 7.62 |
| NDA-05 | 5 | 14.06 | 10.16 |
| NDA-06 | 6 | 16.60 | 12.70 |
| NDA-07 | 7 | 19.14 | 15.24 |
| NDA-08 | 8 | 21.68 | 17.78 |
| NDA-09 | 9 | 24.22 | 20.32 |
| NDA-10 | 10 | 26.76 | 22.86 |
| NDA-12 | 12 | 31.84 | 27.94 |

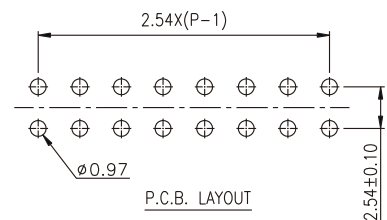

单击下面可查看定价，库存，交付和生命周期等信息

[>>Diptronics\(圆达\)](#)