


### Description

The 0805 series provides miniature surface mount resettable Over-current protection with holding current from 0.05A to 1.50A. This series is suitable for ultra portable applications where space is at a premium and the device current is low.

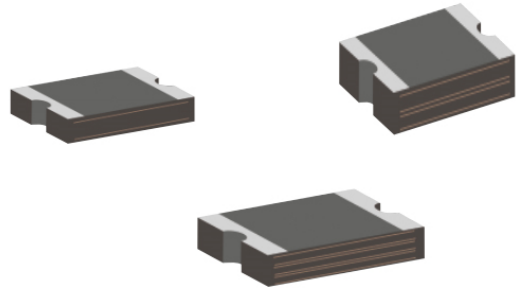


### Features

- I I(hold): 0.05~1.50A
- I Very high voltage surge capabilities
- I Available in lead-free version
- I Fast response to fault current
- I RoHS compliant, Lead- Free and Halogen-Free
- I Low resistance
- I Compact design saves board space
- I Compatible with high temperature solders

### Applications

- I USB peripherals
- I Disk drives
- I CD-ROMs
- I General electronics
- I Disk drives
- I Set-top-box and HDMI
- I Mobile Internet Device (MID)
- I PDAs / digital cameras
- I Game console port protection
- I Plug and play protection for motherboards and peripherals
- I Mobile phones - battery and port protection

### Part Number Code

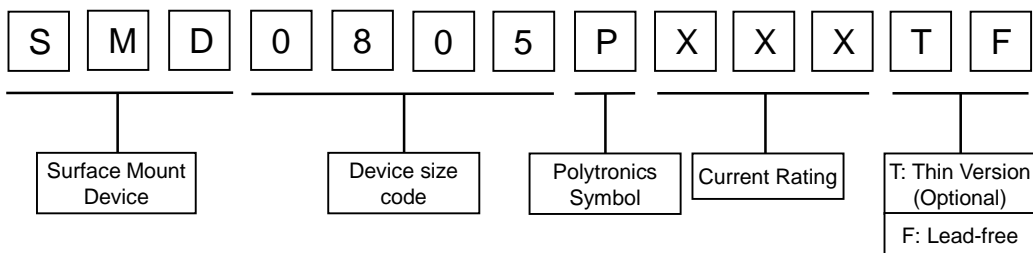

### Environmental Specifications

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ 25°C	$R_{min} \leq R \leq R_{max}$
Time to Trip	Specified current, $V_{max}$ , 25°C	$T \leq$ maximum Time to Trip
Hold Current	30min, at $I_H$	No trip
Trip Cycle Life	$V_{max}$ , $I_{max}$ , 100cycles	No arcing or burning
Trip Endurance	$V_{max}$ , 1hours	No arcing or burning



## Physical Characteristics and Environmental Specifications

Terminal materials :	Tin-Plated Nickle-copper	
Soldering zone	Meets EIA specification RS 186-9E and ANSI/J-STD-002 Category 3.	
Environmental Specifications		
Test	Conditions	Resistance Change
Passive aging	85°C,1000hours	±10%
Humidity aging	85°C/85%RH.1000 hours	±5%
Thermal shock	MIL-STD-202,Method 107G +85°C/-40°C,20times	-30% typical resistance change
Solvent Resistance	MIL-STD-202,Method 215	no change
Vibration	ML-STD-883C,Test Condition A	No change

## Electrical Characteristic

Part Number	V <sub>Max</sub> (Vdc)	I <sub>Max</sub> (A)	I <sub>Hold</sub> (A)	I <sub>Trip</sub> (A)	P <sub>D</sub> Max. (W)	Maximum Time-to-trip		Resistance	
						Current (A)	Time (Sec)	R <sub>Min</sub> (Ω)	R <sub>1Max</sub> (Ω)
SMD0805P005TF	24	100	0.05	0.15	0.5	0.5	1.50	1.50	20.0
SMD0805P010TF	15	100	0.10	0.30	0.5	0.5	1.50	1.00	6.00
SMD0805P010TF/24	24	40	0.05	0.15	0.5	1.50	1.00	6.00	6.00
SMD0805P020TF	9	100	0.20	0.50	0.5	8.0	0.02	0.50	3.50
SMD0805P025TF	6	100	0.25	0.50	0.5	8.0	0.02	0.45	3.20
SMD0805P030TF	6	100	0.30	0.70	0.5	8.0	0.10	0.25	2.00
SMD0805P035TF	6	100	0.35	0.75	0.5	8.0	0.10	0.25	1.20
SMD0805P050TF	6	100	0.50	1.00	0.6	8.0	0.10	0.15	0.85
SMD0805P075TF	6	100	0.75	1.50	0.6	8.0	0.20	0.09	0.385
SMD0805P100TF	6	100	1.00	1.95	0.6	8.0	0.30	0.06	0.23
SMD0805P110TF	6	100	1.10	2.20	0.6	8.0	0.30	0.06	0.21

V<sub>max</sub> = Maximum operating voltage device can withstand without damage at rated current (I<sub>max</sub>).

I<sub>max</sub> = Maximum fault current device can withstand without damage at rated voltage (V max).

I<sub>hold</sub> = Hold Current. Maximum current device will not trip in 25°C still air.

I<sub>trip</sub> = Trip Current. Minimum current at which the device will always trip in 25°C still air.

P<sub>d</sub> = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R<sub>i min/max</sub> = Minimum/Maximum device resistance prior to tripping at 25°C.


R<sub>1max</sub> = Maximum device resistance is measured one hour post reflow.




## Thermal Derating Chart-I<sub>H</sub> ( A )

Part Number	Maximum ambient operating temperatures ( °C )								
	-40	-20	0	25	40	50	60	70	85
SMD0805P005TF	0.07	0.063	0.058	0.05	0.043	0.035	0.03	0.025	0.018
SMD0805P010TF	0.14	0.125	0.115	0.10	0.085	0.07	0.06	0.05	0.035
SMD0805P010TF/24	0.14	0.125	0.115	0.10	0.085	0.07	0.06	0.05	0.035
SMD0805P020TF	0.28	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
SMD0805P025TF	0.35	0.31	0.29	0.25	0.21	0.18	0.15	0.13	0.09
SMD0805P030TF	0.42	0.38	0.35	0.30	0.255	0.21	0.18	0.15	0.11
SMD0805P035TF	0.47	0.44	0.39	0.35	0.30	0.27	0.24	0.20	0.14
SMD0805P050TF	0.68	0.62	0.55	0.50	0.40	0.37	0.33	0.29	0.23
SMD0805P075TF	1.00	0.90	0.79	0.75	0.63	0.57	0.53	0.41	0.34
SMD0805P100TF	1.35	1.25	1.10	1.00	0.82	0.74	0.65	0.55	0.42
SMD0805P110TF	1.45	1.35	1.20	1.10	0.92	0.84	0.75	0.65	0.52


### Thermal Derating Curve

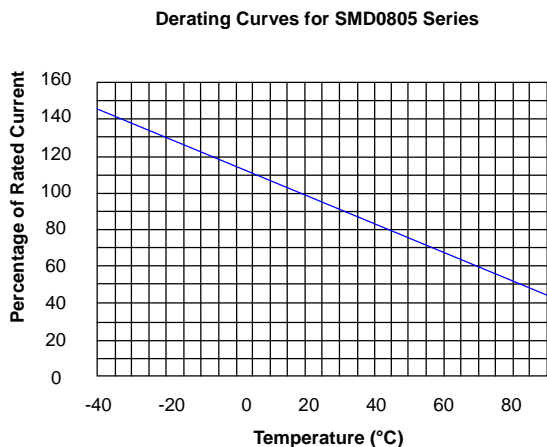

### Average Time-Current Curve


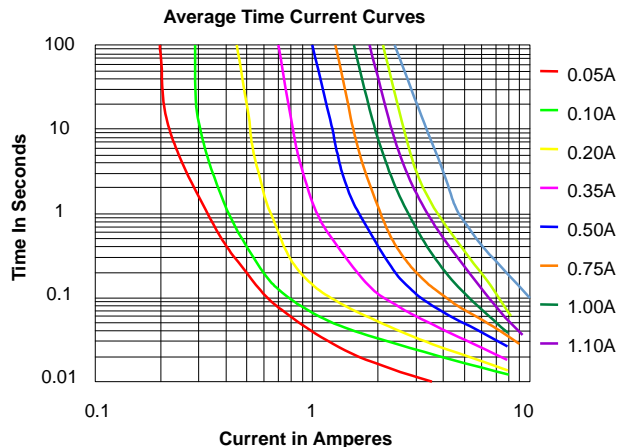


## Soldering Parameters

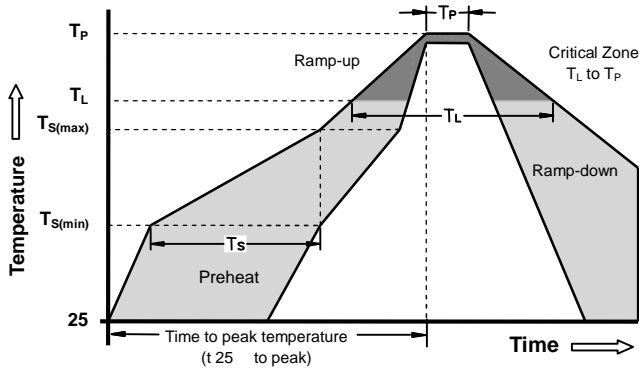

Reflow Condition		Pb - Free assembly
Pre Heat	-Temperature Min ( $T_{s(min)}$ )	150°C
	-Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_s$ )	60 -180 Seconds
Average ramp up rate ( Liquids Temp $T_L$ ) to peak		3°C/second max
$T_{s(max)}$ to $T_L$ - Ramp-up Rate		3°C/second max
Reflow	- Temperature ( $T_L$ ) (Liquids)	217°C
	- Time (min to max) ( $t_s$ )	60 -150 Seconds
Peak Temperature ( $T_p$ )		260 +0/-5°C
Time within 5°C of actual peak Temperature ( $t_p$ )		20 - 40 Seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature ( $T_p$ )		8 minutes Max
Do not exceed		260°C

## Recommended pad layout (mm)

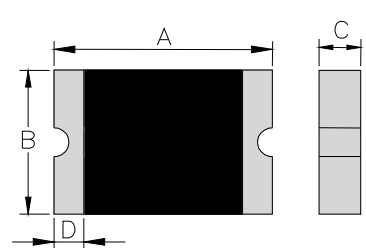
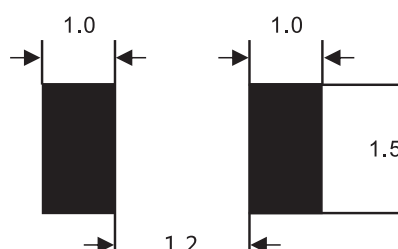
Average Time Current Curves (mm)	Recommended pad layout (mm)
	

## Product Dimensions

Unit : mm

Part Number	Marking	A		B		C		D	E
		Min	Max	Min	Max	Min	Max	Min	Min
SMD0805P005TF	1	2.00	2.20	1.20	1.50	0.45	1.00	0.20	0.10
SMD0805P010TF	1	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.10
SMD0805P010TF/24	1	2.00	2.20	1.20	1.50	0.45	1.00	0.20	0.10
SMD0805P020TF	2	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.10
SMD0805P025TF	2	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.10
SMD0805P030TF	3	2.00	2.20	1.20	1.50	0.30	1.00	0.20	0.10
SMD0805P035TF	3	2.00	2.20	1.20	1.50	0.30	1.00	0.20	0.10
SMD0805P050TF	5	2.00	2.20	1.20	1.50	0.40	0.80	0.20	0.10
SMD0805P075TF	7	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.10
SMD0805P100TF	0	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.10
SMD0805P110TF	0	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.10

## Taping and Reel Specifications

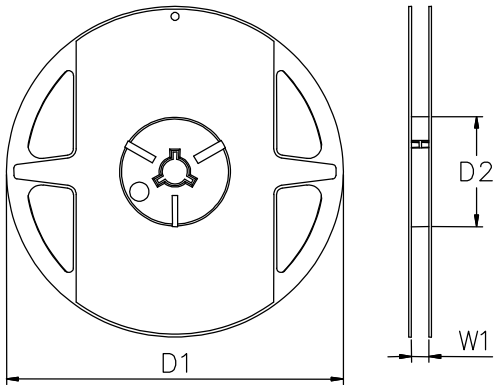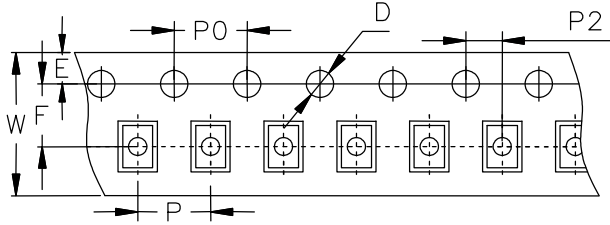

Symbol	Millimeters±	Inches ±
<b>W</b>	8 0.3 ±	0.315 0.012±
<b>P</b>	4 0.1 ±	0.157 0.004±
<b>P0</b>	4 0.1 ±	0.157 0.004±
<b>P2</b>	2 0.05 ±	0.079 0.002±
<b>F</b>	3.5 0.05 ±	0.138 0.002±
<b>E</b>	1.75 0.1 ±	0.069 0.004±
<b>D</b>	1.55 0.05	0.061 0.002
<b>D1(max)</b>	178	7.007
<b>D2(min)</b>	60 ±	2.362 ±
<b>W1</b>	9.0 0.5	0.354 0.02

## Packaging Quantity

Quantity	4000	5000		
<b>Part Number</b>	SMD0805P075TF	SMD0805P110TF	SMD0805P005TF	SMD0805P010TF
	SMD0805P100TF		SMD0805P010TF/24	SMD0805P020TF
			SMD0805P025TF	SMD0805P030TF
			SMD0805P035TF	SMD0805P050TF



单击下面可查看定价，库存，交付和生命周期等信息

[>>SUNMATE\(森美特\)](#)