



## SPECIFICATION

### 宏致電子股份有限公司

桃園縣中壢市東園路13號

No.13, Dongyuan Rd., Zhongli City,

Taoyuan County 320, Taiwan (R.O.C.)

TEL: +886-3-463-2808

FAX: +886-3-463-1800






**SPEC. NO.:** PS-50376-XXXXX **REVISION:** H

**PRODUCT NAME:** 0.6mm PITCH WTB IDC CONNECTOR


**PRODUCT NO:** 50376 、 50476 、 50499 、 51300 SERIES

<b>PREPARED:</b>  <b>ZHUWEI</b>  <b>DATE:</b> <b>2015/07/23</b>	<b>CHECKED:</b>  <b>BRAVE</b>  <b>DATE:</b> <b>2015/07/23</b>	<b>APPROVED:</b>  <b>FRANK</b>  <b>DATE:</b> <b>2015/07/23</b>
--	--	---



2010/10/31 TR-FM-73015L

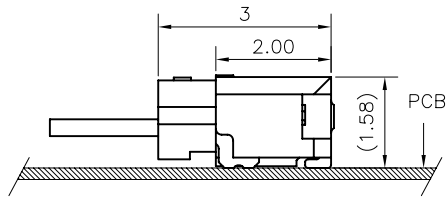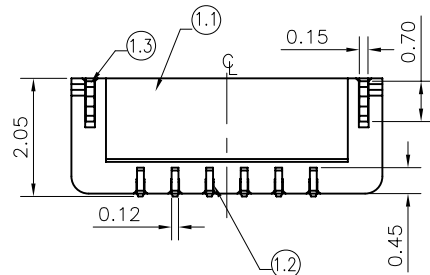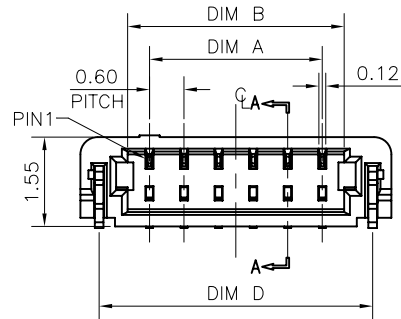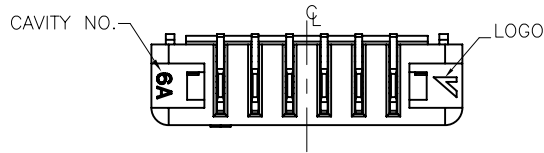

MATED CONDITION

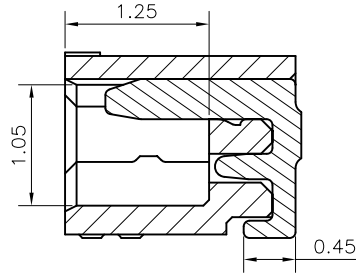

SECTION A-A  
SCALE 2:1

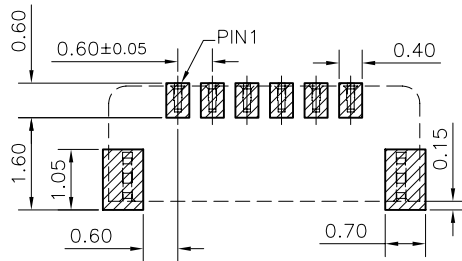

RECOMMEND PCB LAYOUT  
GENERAL TOLERANCE ±0.05

NOTES:

- MATERIAL:
  - HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0
  - CONTACT: COPPER ALLOY
  - NAIL: BRASS
- FINISH:
 

CONTACT:

  - 50u" MIN. NICKEL UNDERPLATING OVERALL.
  - 1: GOLD FLASH PLATING.
  - N: 100u" MIN. MATT TIN.
  - C: 15u" GOLD ON CONTACT AREA

NAIL:


  - 50u" MIN. NICKEL UNDERPLATING OVERALL.
  - 100u" MIN. MATT TIN.
- SPEC. PLS. REFER TO PS-50376-XXXX-001
- PACKAGE PLS. SEE PART NUMBER
- PART NUMBER

50376-XXX X X-XXX  
NO OF CKT  
PACKING:  
0:TAPE REEL  
1:TUBE

XXX	COLOR	TAPE COVER: SELF BOND	PACKING
001	Black	N	EN-50376-XXXX-XX-TRP
002	NATURAL	N	EN-50376-XXXX-XX-TRP
Y02	Black	Y	EN-50376-XXXX-XX-TRP
003	Black	N	EN-50376-XXXX-05-TRP

CONTACT PLATING:

- G/F (LEAD FREE)
- 100u" MATT TIN (LEAD FREE)
- 15u" ON CONTACT AREA



CKT	DIM A	DIM B	DIM C	DIM D
4	1.80	2.56	4.20	3.55
5	2.40	3.16	4.80	4.15
6	3.00	3.76	5.40	4.75
7	3.60	4.36	6.00	5.35
8	4.20	4.96	6.60	5.95
10	5.40	6.16	7.80	7.15
12	6.60	7.36	9.00	8.35
14	7.80	8.56	10.20	9.55
16	9.00	9.76	11.40	10.75

一般公差 <b>TOLERANCES</b> X ±0.5 .XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		<b>宏致電子股份有限公司</b> <b>Aces Electronics Co.,Ltd.</b>	
檢驗尺寸標示 SYMBOLS   INDICATE CLASSIFICATION DIMENSION	品名 (TITLE) 0.6mm PITCH WTB SMT R/A TYPE	製圖 (DR) 15/12/07 LIYAQIN	審核 (CHKD) BRAVE
Ⓢ MARK IS CRITICAL DIM. Ⓢ MARK IS MAJOR DIM.	圖號 (DWG NO.) 50376-XXXX-XXX	核准 (APPD) FRANK	
表面處理 (FINISH)	比例 (SCALE) 1:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1
			SIZE A4
			REV K



TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 2 OF 17

1	REVISION HISTORY .....	3
2	SCOPE .....	4
3	APPLICABLE DOCUMENTS.....	4
4	REQUIREMENTS .....	4
5	PERFORMANCE .....	5
6	INFRARED REFLOW CONDITION .....	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9
8	INSERTION / EXTRACTION FORCE .....	10
9	APPLICABLE SPECIFICATIONS.....	10
10	CONTACT V.S WIRE RETENTION FORCE .....	11
11	TERMINATION DEPTH .....	12
12	ERMINATION APPEARANCE .....	13
13	MATING/UNMATING METHOD CONNECTOR .....	15



Aces P/N: 50376 series 50476 series 50499 series  
51300 series

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 3 OF 17

## 1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
O	ECN-1003221	PRODUCT RELEASE FOR APD980361	STANLEY	2010.03.25
A	ECN-1104189	ADD AWG#34	BRUCE	2011.04.25
B	ECN-1112095	DELETE AWG#34	GAVIN	2011.12.09
C	ECN-1204426	MODIFY CURRENT	BRAVE	2012.04.26
D	ECN-1304034	ADD AWG#34 & Add 51224 51223 50497 Series	Warles	2013.04.01
E	ECN-1305292	ADD 50476 series	Warles	2013.05.23
F	ECN-1401180	ADD 50499 Series	XUFEI	2014.01.10
G	ECN-1507009	ADD 51300 Series	ZHUWEI	2015.04.10
H	ECN-1507351	ADD 16pin INSERTION/EXTRACTION FORCE	ZHUWEI	2015.07.23

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 4 OF 17

## 2 SCOPE

This specification covers performance, tests and quality requirements for **0.6 mm pitch WTB IDC connector**.

## 3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

## 4 REQUIREMENTS

### 4.1 Design and Construction

Product shall be of design, construction and physical dimensions specified on applicable product drawing.

### 4.2 Materials and Finish

4.2.1 Terminal: High performance copper alloy (**Phosphor Bronze**)

Plated: (a) Finish: **Refer to the drawing**.

(b) Under plate: **Refer to the drawing**.

4.2.2 Housing: Thermoplastic, High temp. UL94V-0

4.2.3 Fitting: High performance copper alloy

Plated: (a) Finish: **Refer to the drawing**.

(b) Under plate: **Refer to the drawing**.

### 4.3 Ratings

4.3.1 Voltage: **30** Volts DC

4.3.2 Current:

DC 0.50 Amperes (per pin) AWG# 34(51224 \ 50497) Insulation O.D  $\varphi$  0.32mm

DC 0.50 Amperes (per pin) AWG# 36(51223 \ 50476) Insulation O.D  $\varphi$  0.29mm

4.3.3 Operating Temperature : **-40°C to +85°C**

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 5 OF 17

## 5 Performance

### 5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
<b>ELECTRICAL</b>		
Item	Requirement	Standard
Low Level Contact Resistance	Initial: 30 m Ω max. After Test: 50 m Ω max.	Mate connectors and measure by dry circuit, 20m V max. 10m A (EIA-364-23)
Insulation Resistance	100 M Ω Min.	Unmated connectors, apply 100 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	200V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature Rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70 METHOD 1,CONDITION 1)
<b>MECHANICAL</b>		
Item	Requirement	Standard
Durability	30 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 ± 3mm/min.
Insertion /Extraction Forces (Mating/ Un-mating Force)	See item 8	Operation Speed : 25.4 ± 3 mm/minute.. Measure the force required to mate/unmate connector. (EIA-364-13)
Wire Pull Out Force	See item 10	Operation Speed : 25.4 ± 3 mm/minute. Fix the crimped terminal, apply axial pull out force on the wire.
Terminal/Housing Retention force (Board Side)	70g Min.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the terminal assembled in the housing.



Aces P/N: **50376 series 50476 series 50499 series 51300 series**

TITLE: **0.6mm PITCH WTB IDC CONNECTOR**

RELEASE DATE: **2015/07/23**

REVISION: **H**

ECN No: **ECN-1507351**

PAGE: **6** OF **17**

Vibration	1 $\mu$ s Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of <b>10 and 55 Hz</b> . The entire frequency range, from <b>10 to 55 Hz</b> and return to <b>10 Hz</b> , shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock	1 $\mu$ s Max.	Subject mated connectors to <b>50 G's</b> (peak value) <b>half-sine</b> shock pulses of <b>11</b> milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

**ENVIRONMENTAL**

Item	Requirement	Standard
Humidity	See Product Qualification and Test Sequence Group <b>6</b>	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Thermal Shock	See Product Qualification and Test Sequence Group <b>6</b>	Mate module and subject to follow condition for 5 cycles. 1 cycles: <b>-55 +0/-3 °C</b> , 30 minutes <b>+85 +3/-0 °C</b> , 30 minutes (EIA-364-32, test condition I)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group <b>7</b>	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C <b>(I) Gold flash for 8 hours</b> <b>(II) Gold plating 5 <math>\mu</math>" for 96 hours.</b> (EIA-364-26)
Solder ability (Board Side)	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at <b>245 <math>\pm</math>5°C</b> , for <b>4-5</b> sec. (EIA-364-52)



Aces P/N: **50376 series 50476 series 50499 series**  
**51300 series**

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 7 OF 17

Resistance to <b>Reflow</b> Soldering Heat (Board Side)	See Product Qualification and Test Sequence Group <b>10 (Lead Free)</b>	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.
Hand Soldering Temperature Resistance (Board Side)	Appearance: No damage	T ≥ 350°C, 3sec at least.

**Note.** Flowing Mixed Gas shall be conducted by customer request.



TITLE: 0.6mm PITCH WTB IDC CONNECTOR


RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 8 OF 17

## 6 INFRARED REFLOW CONDITION

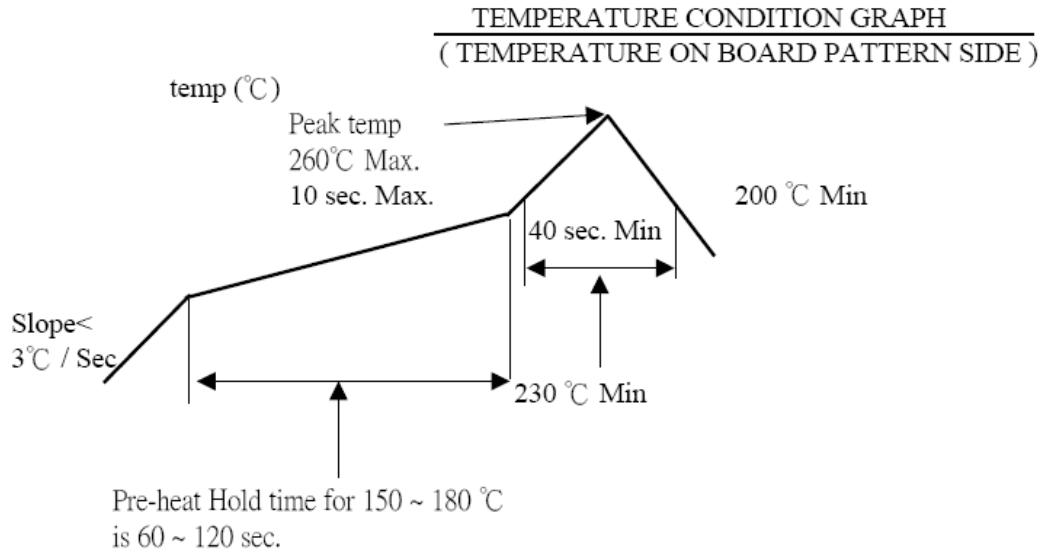



Aces P/N: 50376 series 50476 series 50499 series  
51300 series

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 9 OF 17

## 7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product		1、6	2	2		1、7	1、4		1、3	1	
Contact Resistance		2、7			1、4	2、10	2、5		4		
Insulation Resistance						3、9					
Dielectric Strength						4、8					
Temperature Rise	1										
Insertion /Extraction Forces		3、5									
Wire pull out Forces			1								
Terminal/Housing Extraction Forces				1							
Vibration					2						
Shock					3						
Humidity						5					
Thermal Shock						6					
Solder ability								1			
Resistance to Soldering Heat (Board Side)									2		
Salt Spray (Only For Gold Plating)							3				
Durability		4									
Hand Soldering Temperature Resistance (Board Side)										2	
<b>Sample Size</b>	<b>2</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>4</b>	<b>2</b>	<b>4</b>	<b>4</b>

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H


ECN No: ECN-1507351

PAGE: 10 OF 17

## 8 INSERTION / EXTRACTION FORCE

NO. OF Ckt.	Initial		After 30 <sup>th</sup> Cycle
	Insertion Force (Max.)	Withdrawal Force (Min.)	Withdrawal Force (Min)
4~7	1.4 Kgf	0.2 Kgf	0.15 Kgf
8~16	2.0 Kgf	0.35 Kgf	0.25 Kgf

## 9 APPLICABLE SPECIFICATIONS

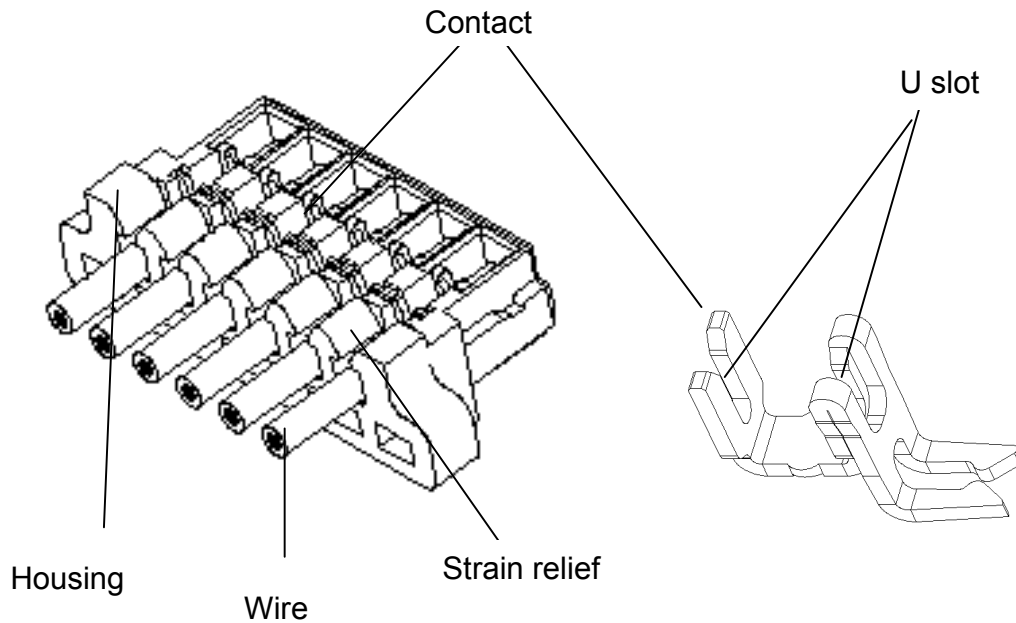

51224、51223 Series


TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION: H

ECN No: ECN-1507351

PAGE: 11 OF 17

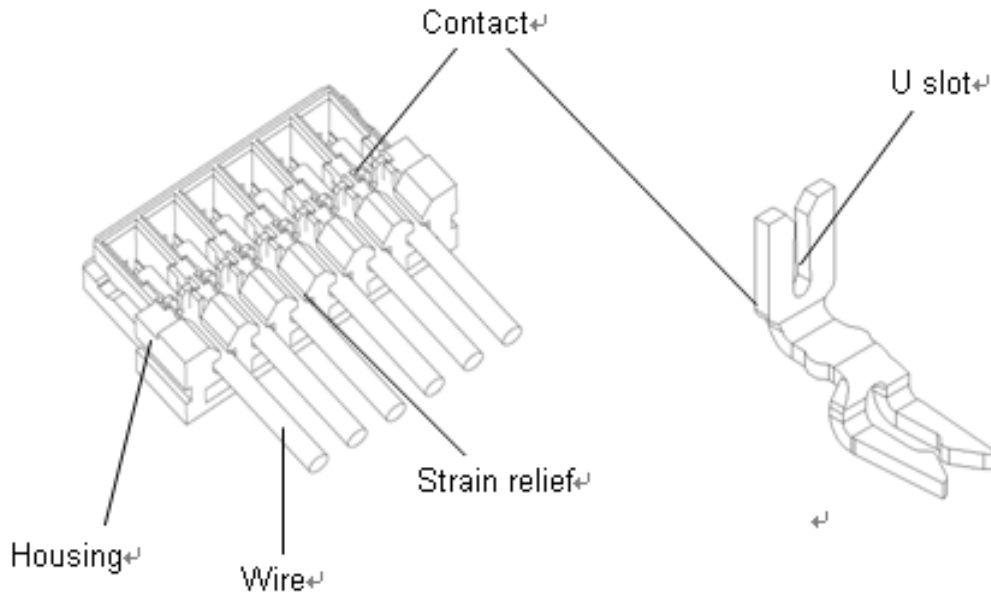

50476 · 50497 Series

## 10 CONTACT V.S WIRE RETENTION FORCE

Wire Size	UL style (REF.)	Material of insulation	Insulation OD	Parallel	Perpendicular
AWG#36 (51223 · 50476)	UL10064	Teflon/PTFE	$\Phi 0.29 \pm 0.02 \text{mm}$	300gf Min.	100gf Min.
AWG#34 (51224 · 50497)	UL10064	Teflon/PTFE	$\Phi 0.32 \pm 0.02 \text{mm}$	300gf Min.	100gf Min.

TITLE: 0.6mm PITCH WTB IDC CONNECTOR


RELEASE DATE: 2015/07/23

REVISION:H


ECN No: ECN-1507351

PAGE: 12 OF 17

Note : It is necessary to use the UV glue for the application of the wire retention force increasing.

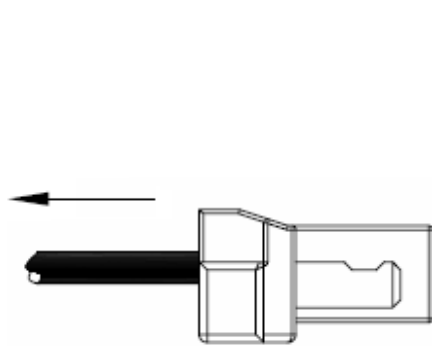

Parallel direction

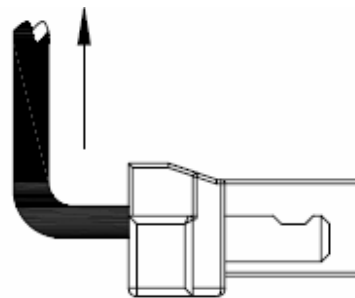

Perpendicular direction

### 11 TERMINATION DEPTH

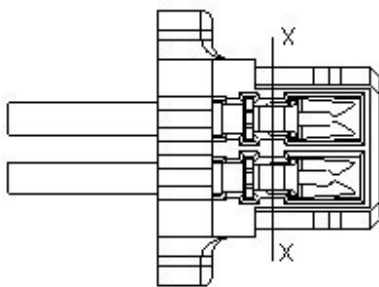


Fig.-1




Fig.-2




Fig.-3

Measure termination depth dimension “D” in Fig.-2 at X-X part in Fig.-1 where is in the middle part of two U slots and a flattened part pressed by termination punch , and check it satisfies specified value in table

Exact termination depth is measure “d” between bottom of slot and position of center core wire of wire conductors as shown in Fig.-3 ; Aces specifies termination depth dimension “D” force to facilitate a time-consuming work of measuring “d” as a daily control.

Accordingly, dimension “D” becomes not reference value but control value for the use of the wire to be checked is Aces expect specified wires.

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 13 OF 17

Wire Size	UL style (REF.)	Insulation OD	Termination Depth D	d
AWG#36 (51223 · 50476 Series)	UL10064	$\Phi 0.29 \pm 0.02 \text{mm}$	$D = 0.31 \pm 0.05 \text{mm}$	$d = 0.15 \pm 0.05 \text{mm}$
AWG#34 (51224 · 50497 Series)	UL10064	$\Phi 0.32 \pm 0.02 \text{mm}$	$D = 0.28 \pm 0.05 \text{mm}$	$d = 0.16 \pm 0.05 \text{mm}$

## 12 ERMINATION APPEARANCE

Inspect the following points after termination.

12.1 Punching flaws on housing caused by termination punch; Housing must be free from flaws. When connector set position deviation, scratches and deformation caused by termination punch may appear at the diagonally shaded areas in Fig.-4.

12.2 Flaws and deformation at beams of contact. Beams must be free from flaws and dimension. When connector set position deviation to wire axis direction, scratches and deformation caused by termination punch may appear at beams of contact as shown in Fig.-5.

In this case, not only contact but also termination die may be damaged.


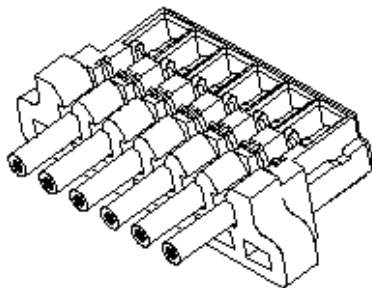


Fig.-4

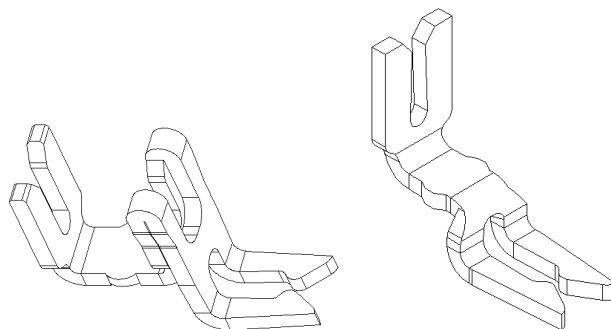

51224 · 51223

50497 · 50476

Fig.-5

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 14 OF 17

12.3 Exposure of wire conductors around beams of contact; Wire conductors must not be exposed. When connector set position deviates to wire axis direction, wire conductors may expose in front or back of beams of contact as shown in Fig.-6.

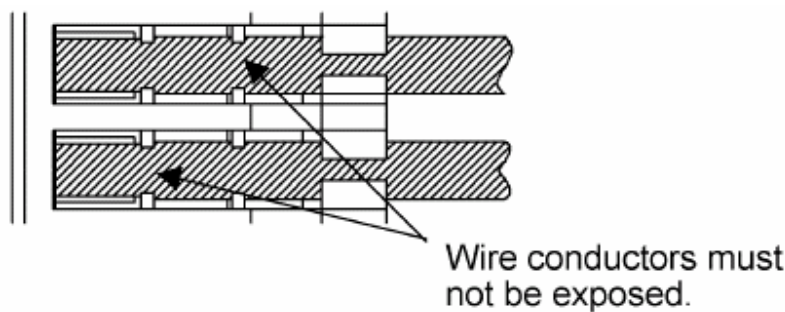


Fig.-6

12.4 Gap between housing wall and wire tip (Wire protruding length) Gap "G" between housing walls and wires tip in Fig.-7 should be 0.2 mm max.

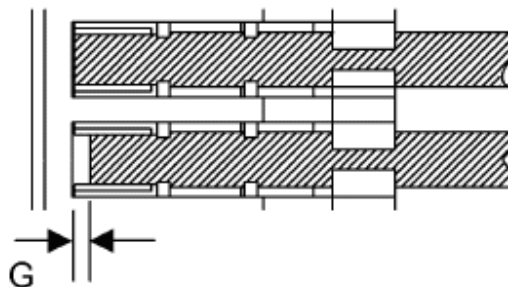


Fig.-7

12.5 Overrun of wire (Wire must not overrun) when wire tension is not adequate, overrun of wire may appear as shown in Fig.-8.

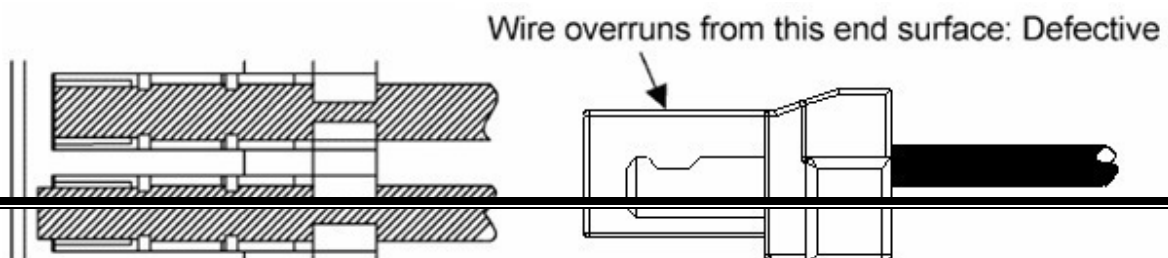


FIGURE 17

2015/07/23

ACES 3015L

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 15 OF 17

Fig.-8

12.6 Deviation of insulation displacement center (Deviation of insulation displacement center must not happen. When connector set position or wire deviates to pitch direction, termination punch, wire and U slots do not align so that insulation displacement center deviate as shown in Fig.-9 and Fig.-10

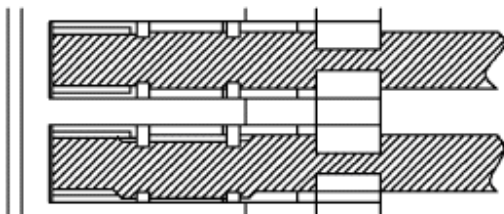


Fig.-9




Fig.-10

Wire conductors do not contact with the right side of U slot.

### 13 MATING/UNMATING METHOD CONNECTOR

#### 13.1 Mating method of connector

Mated receptacle with header straight on same axis. When the position of mating part of header and receptacle is aligned, align one side of mating part of header with the end of receptacle within 20 degrees to mating axis as shown in Fig.-11.

Do not mate receptacle at the angle of 20 degrees or more, because such handling may cause breakage of connector, etc.

When position of receptacle and header is aligned, hold wires in a bundle in order to prevent applying external force to receptacle. Then, mate receptacle with header up to the back straight against mating axis.

Besides, after mating operation, check that there is no clearance between header and receptacle as shown in Fig.-12, because such clearance may lead discontinuity of connector.



TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 16 OF 17

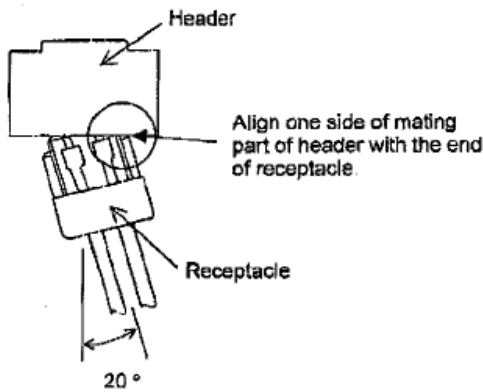


Fig.-11

Align the position (Side entry type)

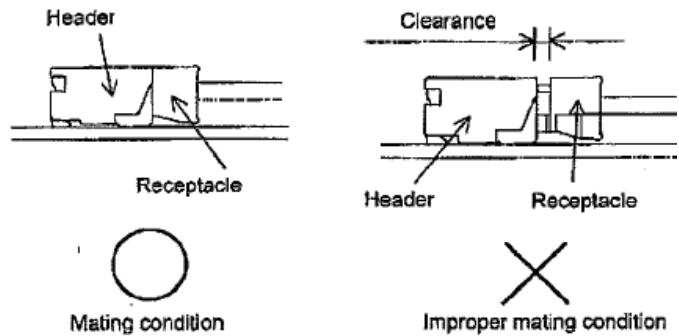


Fig.-12

Mating condition (Side entry type)

13.2 Unmating method of connector


Hold wires in a bundle and unmate receptacle from header on the same axis. At this time, conduct operation within 20 degrees to mating axis.

Do not unmate receptacle forcibly with prying more than 20 degrees, because such handling may cause breakage of connector, etc.

If receptacle is unmated with holding wire of only one end, such handling is the same as prying connector.

Beside, there is a possibility that wire may come off housing when they are unmated without holding in a bundle.

Even when all wires cannot be held in routing of wires, wire more than the number shown in the Table-1 should be held and unmated.

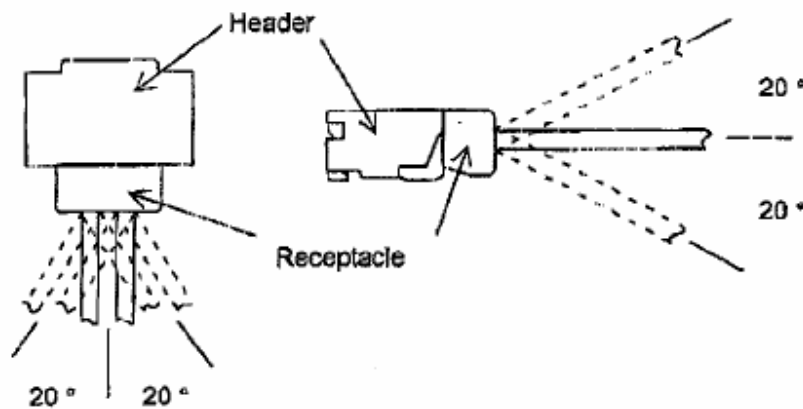

TITLE: 0.6mm PITCH WTB IDC CONNECTOR

RELEASE DATE: 2015/07/23

REVISION:H

ECN No: ECN-1507351

PAGE: 17 OF 17

Fig.-13

CKTS	Wires
2	hold 2 wires without fail
3~5	hold more than 3 wires
6~10	hold more than 4 wires
11~15	hold more than 5wires
16~20	hold more than 6 wires

Table -1

### 13.3 Routing of wire

In routing wire, careful operation is required so that tension more than 1N may not be applied per connector and one wire (one circuit).

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES \(宏致\)](#)