

TO :

文件编号

HXA-L32-01 (01)

发行日期

2018年03月09日

承认规格书

种类： Power Inductor系列号： HXNR252010NF-Series

客户料号： _____

客户承认栏

| | | | | |
|------|--|---|---|---|
| 承认日期 | | 年 | 月 | 日 |
|------|--|---|---|---|

(贵司承认后请签署一份返回华信安电子, 谢谢!)

厦门华信安电子科技有限公司技术质量部

| | | |
|----|----|----|
| 承认 | 确认 | 作成 |
| 龙梅 | 梁峰 | 王亮 |

TEL : 0592-6301603 FAX : 0592-5205265

Http : www.xmisnd.com

Power Inductor


HXNR252010NF-SERIES

1. Features

1. This specification applies Low Profile Power Inductors.
2. 100% Lead(Pb) & Halogen-Free and RoHS compliant.



2. Dimension

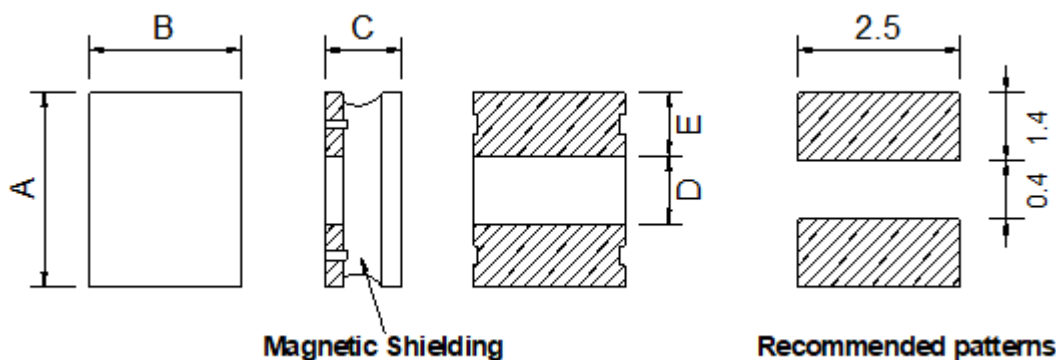
Magnetic Shielding
Recommended patterns

| Series | A(mm) | B(mm) | C(mm) | D(mm) | E(mm) |
|--------------|---------|---------|----------|----------|----------|
| HXNR252010NF | 2.5±0.3 | 2.0±0.3 | 1.05 max | 0.94±0.3 | 0.83±0.3 |

3. Part Numbering

HXNR
252010
NF
-
2R2
M

A: Series

B: Dimension

C: Control S/N

D: Inductance

2R2=2.2uH

E: Inductance Tolerance

M=±20%

4. Specification

| ISND Part Number | Inductance (uH) | Tolerance (%) | Test Frequency (Hz) | DCR (Ω) MAX | I sat (A).TYP | I sat (A).MAX | I rms (A) TYP | I rms (A) MAX |
|-------------------|-----------------|---------------|---------------------|-------------|---------------|---------------|---------------|---------------|
| HXNR252010NF-R47M | 0.47 | ±20% | 0.25V/1M | 0.056 | 3.36 | 2.50 | 2.58 | 2.35 |
| HXNR252010NF-R68M | 0.68 | ±20% | 0.25V/1M | 0.074 | 2.78 | 2.20 | 2.20 | 2.00 |
| HXNR252010NF-1R0M | 1.0 | ±20% | 0.25V/1M | 0.108 | 2.23 | 1.85 | 1.85 | 1.65 |
| HXNR252010NF-1R5M | 1.5 | ±20% | 0.25V/1M | 0.182 | 2.14 | 1.80 | 1.44 | 1.30 |
| HXNR252010NF-2R2M | 2.2 | ±20% | 0.25V/1M | 0.209 | 1.60 | 1.20 | 1.32 | 1.20 |
| HXNR252010NF-3R3M | 3.3 | ±20% | 0.25V/1M | 0.328 | 1.32 | 1.05 | 0.98 | 0.90 |
| HXNR252010NF-4R7M | 4.7 | ±20% | 0.25V/1M | 0.563 | 1.16 | 0.95 | 0.78 | 0.70 |
| HXNR252010NF-6R8M | 6.8 | ±20% | 0.25V/1M | 0.563 | 0.95 | 0.78 | 0.65 | 0.59 |
| HXNR252010NF-100M | 10 | ±20% | 0.25V/1M | 1.092 | 0.80 | 0.65 | 0.58 | 0.50 |
| HXNR252010NF-150M | 15 | ±20% | 0.25V/1M | 1.885 | 0.55 | 0.46 | 0.42 | 0.36 |
| HXNR252010NF-220M | 22 | ±20% | 0.25V/1M | 2.400 | 0.50 | 0.45 | 0.36 | 0.30 |


Note:

Isat : Based on inductance change ($\Delta L/L0$: $\leq -30\%$) @ ambient temp. 25°C

Irms : Based on temperature rise (ΔT : 40°C typ.)

5. Material List

| No. | Description | Specification |
|-----|-------------|----------------------|
| a. | Core | Ferrite N4 Core |
| b. | Coating | Epoxy |
| c. | Termination | Tin Pb Free |
| d. | Wire | Enameled Copper Wire |

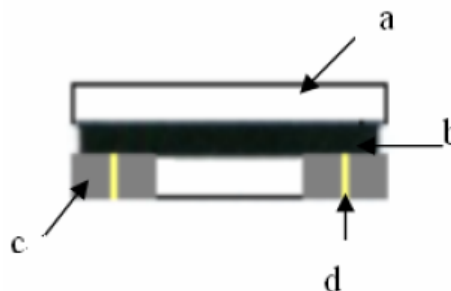

6. Reliability and Test Condition

| Item | Performance | Test Condition |
|---------------------------------|--|--|
| Operating Temperature | -40~+125°C(For products in unopened tape package, less than 40°C) | Including self-generated heat |
| Storage Temperature | - 40 ~ +85°C. - 5 to 40°C for the product with taping. | |
| Rated current | | |
| Inductance (L) | Within the specified tolerance | LCR Meter: HP 4285A or equivalent, 100kHz, 1V |
| DC Resistance | | DC Ohmmeter: HIOKI3227 or equivalent |
| Temperature characteristics | Inductance change : Within±20% | Measurement of inductance shall be taken at temperature rang within-25°C to +85°C. With reference to inductance value at+20 °C,change rate shall be calculated. Measurement of inductance shall be taken at temperature rang within-40°C to +125°C. With reference to inductance value at+20 °C,change rate shall be calculated. |
| Resistance to flexure substrate | No damage. | The test samples shall be soldered to the testing board by the reflow. As illustrated below, apply force in the direction of the arrow indicating until deflection of the test board reaches to 2mm. Substrate size : 100x40x1.0 Substrate material : glass epoxy-resin Solder cream thickness : 0.10 |
| Adhesion of Terminal electrode | Shall not come off PC board. | The test samples shall be soldered to the testing board and by the reflow. Applied force : 10 N to X and Y directions. Duration : 5s Solder cream thickness : 0.10 |
| Resistance to Vibration | Inductance change : Within±10% No abnormality observed in appearance. | The test samples shall be soldered to the test board by the reflow. Then it shall be submitted to below test conditions. Frequency: 10-55Hz Total Amplitude: 1.5mm (May not exceed acceleration 196m/S2) Sweeping Method:10Hz to 55Hz to 10Hz for 1min. Time : 2 hours each in X,Y, and Z Direction. Recovery: At least 2hrs of recovery under the standard condition after the test, followed by the measurement within 48hrs. |
| Solderability | At least 90% of surface of terminal electrode is covered by new solder. | The test samples shall be dipped in flux, and then immersed in molten solder as shown in below. Flux : methanol solution containing rosin 25% Solder temperature: 245±5°C Time: 5±1.0 sec. Immersion depth: All sides of mounting terminal shall be immersed. |

| Resistance to soldering | Inductance change : Within±10% No abnormality observed in appearance. | The test sample shall be exposed to reflow oven at 230±5°C for 40 seconds, with peak temperature at 260±5°C for 5 seconds.2 times. Test board thickness: 1.0mm Test board material: glass epoxy-resin | | | | | | | | | | | | | | | |
|---------------------------------------|--|--|------------|-----------------|------------|---|---------|------|---|-----------|----------|---|--------|------|---|-----------|----------|
| Item | Performance | Test Condition | | | | | | | | | | | | | | | |
| Thermal shock | Inductance change : Within±10% No abnormality observed in appearance. | <p>The test samples shall be soldered to the test board by the reflow. The test samples shall be placed at specified temperature for specified time by step 1 to step 4 as shown below in sequence. The temperature cycles shall be repeated 100 cycles .</p> <table border="1" data-bbox="991 461 1374 580"> <thead> <tr> <th>Phase</th> <th>Temperature(°C)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40±3°C</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room Temp</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>85±2°C</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room Temp</td> <td>Within 3</td> </tr> </tbody> </table> | Phase | Temperature(°C) | Time(min.) | 1 | -40±3°C | 30±3 | 2 | Room Temp | Within 3 | 3 | 85±2°C | 30±3 | 4 | Room Temp | Within 3 |
| Phase | | Temperature(°C) | Time(min.) | | | | | | | | | | | | | | |
| 1 | | -40±3°C | 30±3 | | | | | | | | | | | | | | |
| 2 | | Room Temp | Within 3 | | | | | | | | | | | | | | |
| 3 | | 85±2°C | 30±3 | | | | | | | | | | | | | | |
| 4 | | Room Temp | Within 3 | | | | | | | | | | | | | | |
| Damp heat life test | | <p>Test Method and Remarks The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below. Temperature: 60±2°C Humidity: 90~95%RH Time: 500+24/-0 hrs</p> | | | | | | | | | | | | | | | |
| Loading under damp heat life test | | <p>The test samples shall be soldered to the test board by the reflow. The test samples shall be placed in thermostatic oven set at specified temperature and humidity and applied the rated current continuously as shown in below. Temperature: 60±2°C Humidity: 90~95%RH Applied current: Rated current Time: 500+24/-0 hrs</p> | | | | | | | | | | | | | | | |
| Low temperature life test | | <p>The test samples shall be soldered to the test board by the reflow. After that, the test samples shall be placed at test conditions as shown in below. Temperature:-40±2°C Time:500+24/-0 hrs</p> | | | | | | | | | | | | | | | |
| Loading at high temperature life test | | <p>The test samples shall be soldered to the test board by the reflow. Temperature: 85±2°C. Applied current: Rated current Time: 500+24/-0 hrs.</p> | | | | | | | | | | | | | | | |

7. Soldering

7-1. Soldering

7-2. Recommended PC Board Pattern

Mildly activated rosin fluxes are preferred. ISND terminations are suitable for all wave and re-flow soldering systems.

If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

7-1.1 Solder re-flow:

Recommended temperature profiles for re-flow soldering in Figure 1.

7-1.2 Soldering Iron(Figure 2):

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

·Preheat circuit and products to 150°C ·Never contact the ceramic with the iron tip ·Use a 20 watt soldering iron with tip diameter of 1.0mm

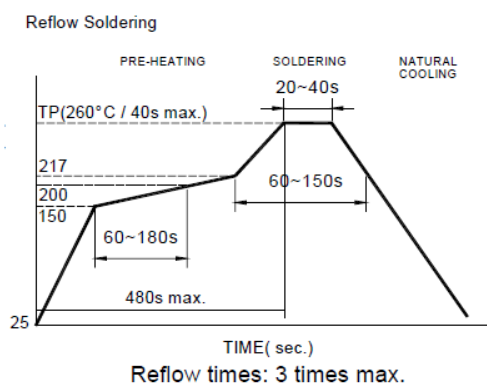


Fig.1


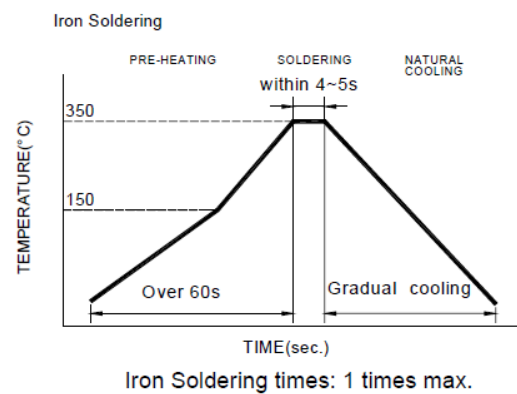


Fig.2


8. Packaging Information

(1) Reel Dimension

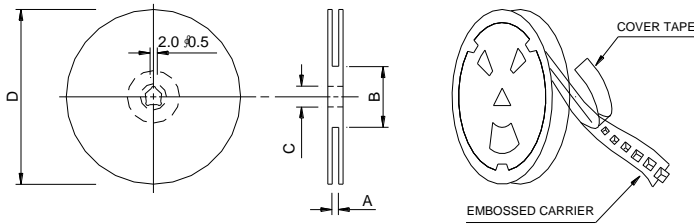

| Type | A(mm) | B(mm) | C(mm) | D(mm) |
|--------------|---------|--------|--------|-------|
| HXNR252010NF | 8.4±1.0 | 50 min | 13±0.8 | 178±2 |

(2) Tape Dimension

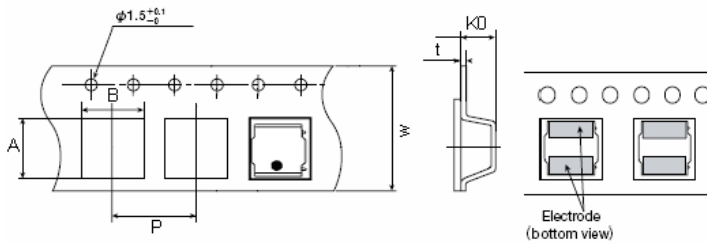


| Type | A(mm) | B(mm) | Ko(mm) | P(mm) | W(mm) | t(mm) |
|--------------|---------|---------|---------|---------|---------|-----------|
| HXNR252010NF | 3.1±0.1 | 3.1±0.1 | 1.6±0.1 | 4.0±0.1 | 8.0±0.2 | 0.23±0.05 |

(3) Packaging Quantity

| Type | Chip / Reel |
|--------------|-------------|
| HXNR252010NF | 2000 |

8-4. Tearing Off Force

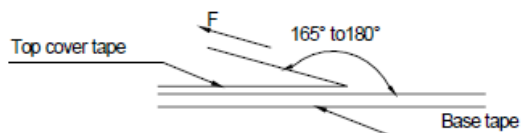

The force for tearing off cover tape is 15 to 80 grams in the arrow direction under the following conditions.

| Room Temp. (°C) | Room Humidity (%) | Room atm (hPa) | Tearing Speed mm/min |
|-----------------|-------------------|----------------|----------------------|
| 5~35 | 45~85 | 860~1060 | 300 |

Application Notice

Storage Conditions

To maintain the solderability of terminal electrodes:

1. ISND products meet IPC/JEDEC J-STD-020D standard-MSL, level 1.
2. Temperature and humidity conditions: Less than 40°C and 60% RH.
3. Recommended products should be used within 12 months from the time of delivery.
4. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

单击下面可查看定价，库存，交付和生命周期等信息

[>>ISND\(华信安\)](#)