

SPF SERIES SOLAR FUSES

1000 Vdc • 1-30 A



Description

The SPF Solar Protection Fuse series has been specifically designed for the protection of photovoltaic (PV) systems. This family of Midget style fuses (10 x 38 mm) can safely protect PV modules and conductors from reverse-overcurrent conditions.

As PV systems have grown in size, so have the corresponding voltage requirements. This increase in system voltage has typically been intended to minimize power loss associated with long conductor runs. Standard circuit protection devices are not designed to completely protect photovoltaic panels. However, the SPF series is UL Listed to safely interrupt faulted circuits up to this demanding voltage level.

Littelfuse offers 14 ampere ratings to match specific requirements in a variety of applications.

Features/Benefits

- Meets UL and IEC photovoltaic standards
- UL 248-19 Listed 1000 Vdc maximum
- 1-30 A ratings available
- 20,000 A Interrupting Rating - 1A - 20A
- 50,000 A Interrupting Rating - 25A - 30A
- Both PCB mount and dead-front holder options available

Applications

- Inverters
- Combiner boxes
- Battery charge controllers

Recommended Fuse Holders

LPHV 1000 Vdc POWR-Safe Series


Web Resources

Download technical documents: littelfuse.com/spf

Specifications


| | |
|---------------------------------|--|
| Voltage Rating | 1000 VDC |
| Amperage Rating | 1, 2, 3, 3.5, 4, 5, 6, 8, 10, 12, 15, 20, 25, 30 |
| Max. Interrupting Rating | 20 kA - 1A - 20A 50 kA - 25A - 30A |
| Time Constant | ≤ 2ms |
| Material | Body: Melamine Caps: Copper Alloy |
| Approvals | UL 248-19 Listed (File: E339112) IEC 60269-6 (1-30 A) CSA Certified (File: 029862_0_000) |
| Environmental | RoHS Compliant |
| Country of Origin | Mexico |

Part Numbering System

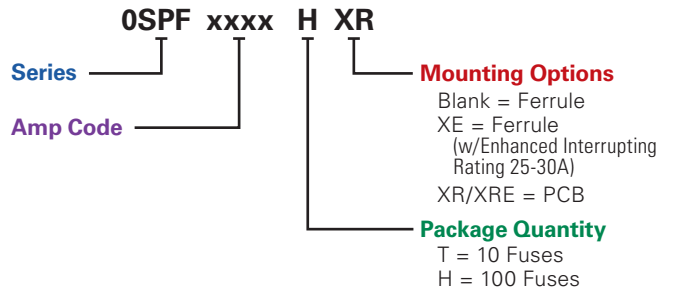

| SERIES | AMP | PACKAGE QUANTITY | MOUNTING METHOD | CATALOG NUMBER | ORDERING NUMBER |
|--------|-----|------------------|-----------------|----------------|-----------------|
| SPF | 2 | 10 | FERRULE | SPF002 | OSPF002.T |
| SPF | 3.5 | 10 | FERRULE | SPF03.5 | OSPF03.5T |
| SPF | 30 | 100 | PCB TABS | SPF030R | OSPF030.HXR |

Dimensions Inches (mm)

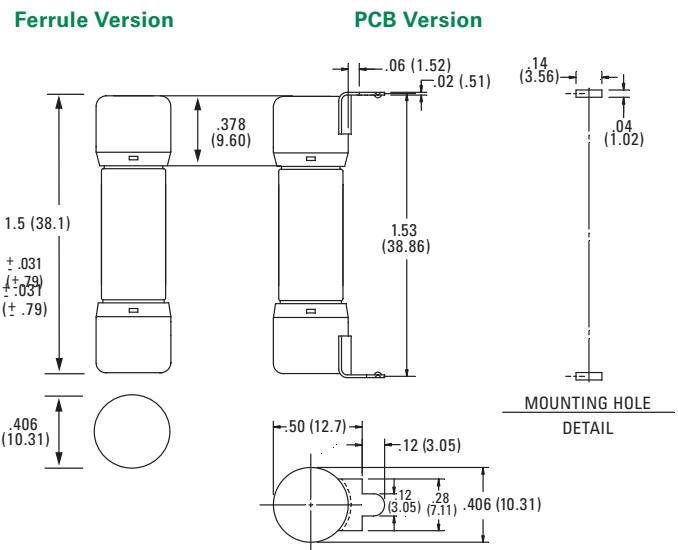

Look for this logo to indicate products that are used in solar applications. Visit our website littelfuse.com/solar for the latest updates on approvals, certifications, and new products.

SPF SERIES SOLAR FUSES

Electrical Specifications Ferrule Version

| AMPERAGE | AMP CODE | ORDERING NUMBER | FUSE LABEL ID | UPC | VOLTAGE | | NOM COLD RESISTANCE (ohm) | WATTS LOSS AT 100% RATED CURRENT (W) | WATTS LOSS AT 80% RATED CURRENT (W) | TOTAL CLEARING I ² t (A ² s) 10 kA | TOTAL CLEARING I ² t (A ² s) 20 kA | TOTAL CLEARING I ² t (A ² s) 50 kA | AGENCY APPROVALS | |
|----------|----------|-----------------|---------------|-------------|---------|----|---------------------------|--------------------------------------|-------------------------------------|--|--|--|------------------|-----|
| | | | | | DC | DC | | | | | | | UL | CSA |
| 1 | 001. | OSPF001.T | SPF 1A | 07945816907 | 1000 | 20 | 0.394 | 0.602 | 0.410 | 0.554 | 0.554 | - | • | • |
| 2 | 002. | OSPF002.T | SPF 2A | 07945816910 | 1000 | 20 | 0.237 | 1.586 | 0.851 | 1.175 | 4.755 | - | • | • |
| 3 | 003. | OSPF003.T | SPF 3A | 07945816913 | 1000 | 20 | 0.11 | 1.504 | 0.824 | 5.007 | 7.882 | - | • | • |
| 3.5 | 03.5 | OSPF03.5T | SPF 3-½A | 07945880087 | 1000 | 20 | 0.07787 | 1.365 | 0.778 | 11.297 | 11.297 | - | • | • |
| 4 | 004. | OSPF004.T | SPF 4A | 07945816916 | 1000 | 20 | 0.06127 | 1.491 | 0.839 | 23.031 | 23.031 | - | • | • |
| 5 | 005. | OSPF005.T | SPF 5A | 07945816919 | 1000 | 20 | 0.04086 | 1.465 | 0.859 | 42.600 | 42.600 | - | • | • |
| 6 | 006. | OSPF006.T | SPF 6A | 07945816922 | 1000 | 20 | 0.0281 | 1.348 | 0.769 | 76.270 | 80.254 | - | • | • |
| 8 | 008. | OSPF008.T | SPF 8A | 07945816925 | 1000 | 20 | 0.0178 | 1.610 | 0.914 | 193.323 | 198.960 | - | • | • |
| 10 | 010. | OSPF010.T | SPF 10A | 07945816928 | 1000 | 20 | 0.0125 | 1.760 | 1.000 | 395.556 | 401.208 | - | • | • |
| 12 | 012. | OSPF012.T | SPF 12A | 07945816931 | 1000 | 20 | 0.00993 | 1.965 | 1.109 | 599.198 | 641.940 | - | • | • |
| 15 | 015. | OSPF015.T | SPF 15A | 07945816934 | 1000 | 20 | 0.007855 | 2.282 | 1.382 | 457.740 | 504.770 | - | • | • |
| 20 | 020. | OSPF020.T | SPF 20A | 07945816937 | 1000 | 20 | 0.0045 | 2.810 | 1.574 | 1173.990 | 1312.850 | - | • | • |
| 25 | 025. | OSPF025.TXE | SPF 25A E | 07945819813 | 1000 | 50 | 0.00370 | 3.331 | 1.878 | - | 2141.000 | 2433.000 | • | • |
| 30 | 030. | OSPF030.TXE | SPF 30A E | 07945819818 | 1000 | 50 | 0.00299 | 3.845 | 2.147 | - | 3290.000 | 3810.000 | • | • |

Electrical Specifications PCB Version


| AMPERAGE | AMP CODE | ORDERING NUMBER | FUSE LABEL ID | UPC | VOLTAGE | | NOM COLD RESISTANCE (ohm) | WATTS LOSS AT 100% RATED CURRENT (W) | WATTS LOSS AT 80% RATED CURRENT (W) | TOTAL CLEARING I ² t (A ² s) 10 kA | TOTAL CLEARING I ² t (A ² s) 20 kA | TOTAL CLEARING I ² t (A ² s) 50 kA | AGENCY APPROVALS | |
|----------|----------|-----------------|---------------|-------------|---------|----|---------------------------|--------------------------------------|-------------------------------------|--|--|--|------------------|-----|
| | | | | | DC | DC | | | | | | | UL | CSA |
| 1 | 001. | OSPF001.HXR | SPF 1A-R | 07945816909 | 1000 | 20 | 0.394 | 0.602 | 0.410 | 0.554 | 0.554 | - | • | • |
| 2 | 002. | OSPF002.HXR | SPF 2A-R | 07945816912 | 1000 | 20 | 0.237 | 1.586 | 0.851 | 1.175 | 4.755 | - | • | • |
| 3 | 003. | OSPF003.HXR | SPF 3A-R | 07945816915 | 1000 | 20 | 0.11 | 1.504 | 0.824 | 5.007 | 7.882 | - | • | • |
| 3.5 | 03.5 | OSPF03.5HXR | SPF 3-½A-R | 07945880089 | 1000 | 20 | 0.07787 | 1.365 | 0.778 | 11.297 | 11.297 | - | • | • |
| 4 | 004. | OSPF004.HXR | SPF 4A-R | 07945816918 | 1000 | 20 | 0.06127 | 1.491 | 0.839 | 23.031 | 23.031 | - | • | • |
| 5 | 005. | OSPF005.HXR | SPF 5A-R | 07945816921 | 1000 | 20 | 0.04086 | 1.465 | 0.859 | 42.600 | 42.600 | - | • | • |
| 6 | 006. | OSPF006.HXR | SPF 6A-R | 07945816924 | 1000 | 20 | 0.0281 | 1.348 | 0.769 | 76.270 | 80.254 | - | • | • |
| 8 | 008. | OSPF008.HXR | SPF 8A-R | 07945816927 | 1000 | 20 | 0.0178 | 1.610 | 0.914 | 193.323 | 198.960 | - | • | • |
| 10 | 010. | OSPF010.HXR | SPF 10A-R | 07945816930 | 1000 | 20 | 0.0125 | 1.760 | 1.000 | 395.556 | 401.208 | - | • | • |
| 12 | 012. | OSPF012.HXR | SPF 12A-R | 07945816933 | 1000 | 20 | 0.00993 | 1.965 | 1.109 | 599.198 | 641.940 | - | • | • |
| 15 | 015. | OSPF015.HXR | SPF 15A-R | 07945816936 | 1000 | 20 | 0.007855 | 2.282 | 1.382 | 457.740 | 504.770 | - | • | • |
| 20 | 020. | OSPF020.HXR | SPF 20A-R | 07945817594 | 1000 | 20 | 0.0045 | 2.810 | 1.574 | 1173.990 | 1312.850 | - | • | • |
| 25 | 025. | OSPF025.HXRE | SPF 25A-RE | 07945819817 | 1000 | 50 | 0.00370 | 3.331 | 1.878 | - | 2141.000 | 2433.000 | • | • |
| 30 | 030. | OSPF030.HXRE | SPF 30A-RE | 07945819822 | 1000 | 50 | 0.00299 | 3.845 | 2.147 | - | 3290.000 | 3810.000 | • | • |

SPF SERIES SOLAR FUSES

Electrical Specification – Agency Requirements

| AMPERAGE RATING | OPENING TIME (MINUTES) | | | | |
|-----------------|---------------------------|----------------------------|---------------------------|----------------------------|---------------------------|
| | 100% of Amp Rating per UL | 113% of Amp Rating per IEC | 135% of Amp Rating per UL | 145% of Amp Rating per IEC | 200% of Amp Rating per UL |
| 1-30 | Temperature Stabilization | 60 Min | 60 Max | 60 Max | 4 Max |


Temperature Derating Curve (Temperature of Air Immediately Surrounding Fuse)

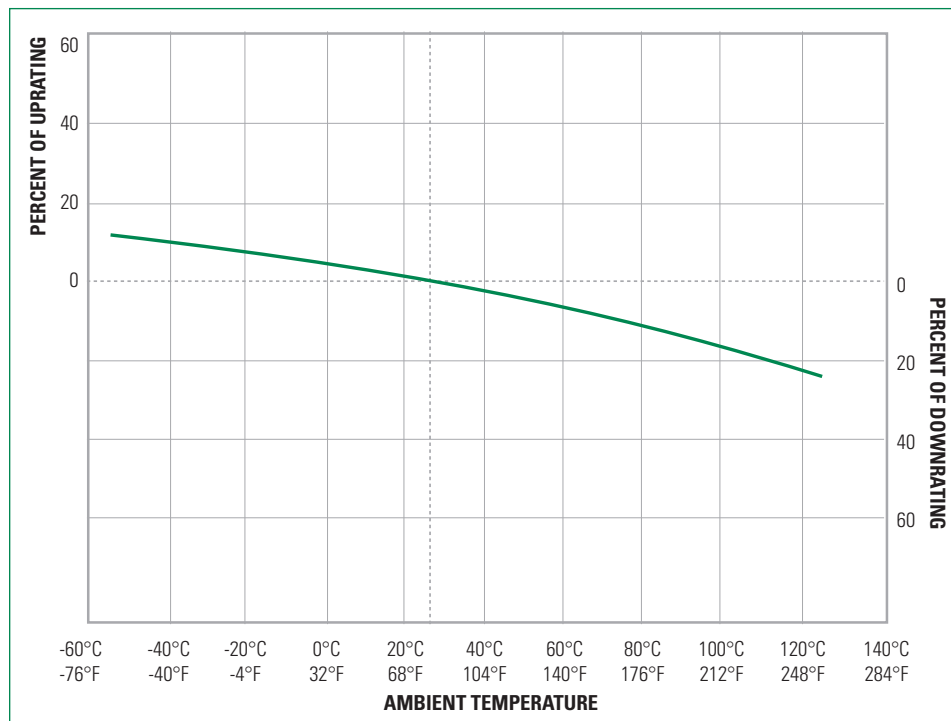

Recommended Process Parameters


Soldering Parameters

| WAVE PARAMETER | LEAD FREE RECOMMENDATION |
|------------------------|-----------------------------------|
| PREHEAT: | (Typical Industry Recommendation) |
| TEMPERATURE MINIMUM: | 130° C |
| TEMPERATURE MAXIMUM: | — |
| PRE-HEAT TIME | 75 Seconds Maximum |
| SOLDER POT TEMPERATURE | 280° C Maximum |
| SOLDER DWELL TIME | 270° C for 8 Seconds Maximum |
| COMPLETE CYCLE TIME | 250 Seconds Maximum |

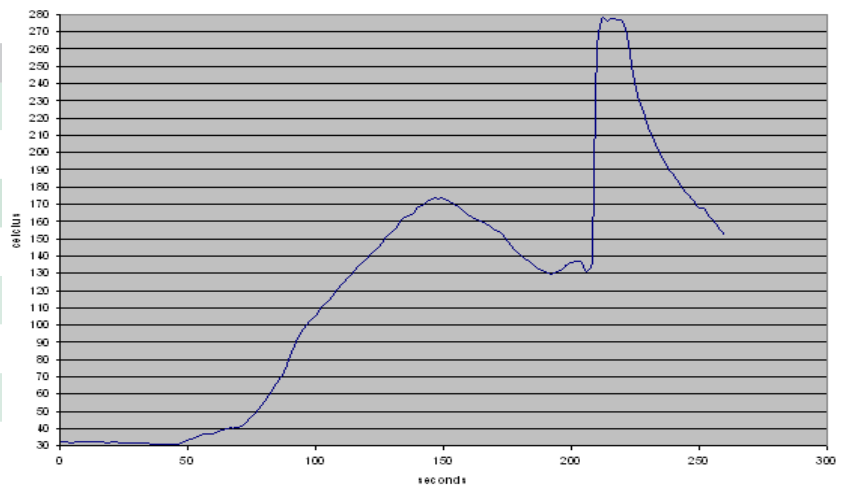


SPF SERIES SOLAR FUSES

Time Current Curve (1-12 A)

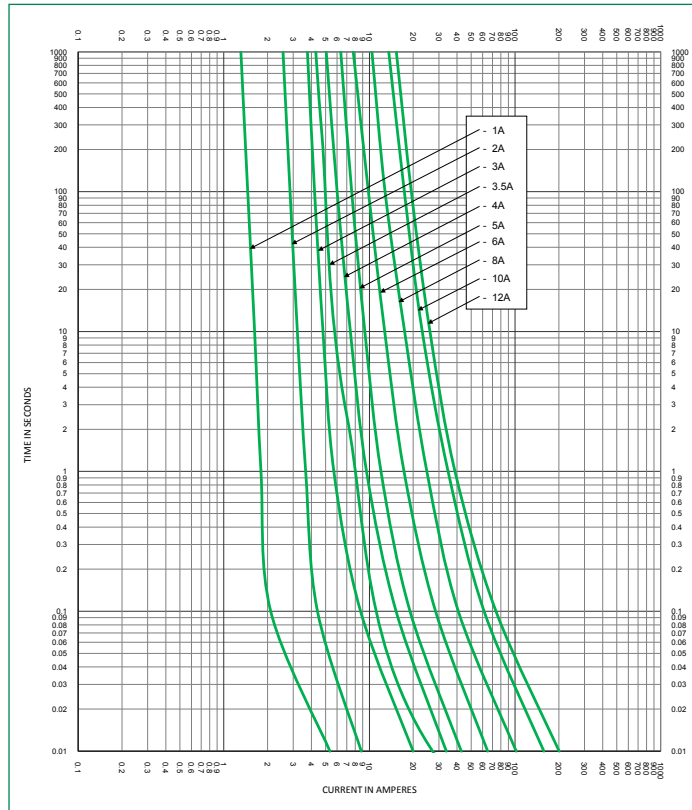


Time Current Curve (15-20 A)

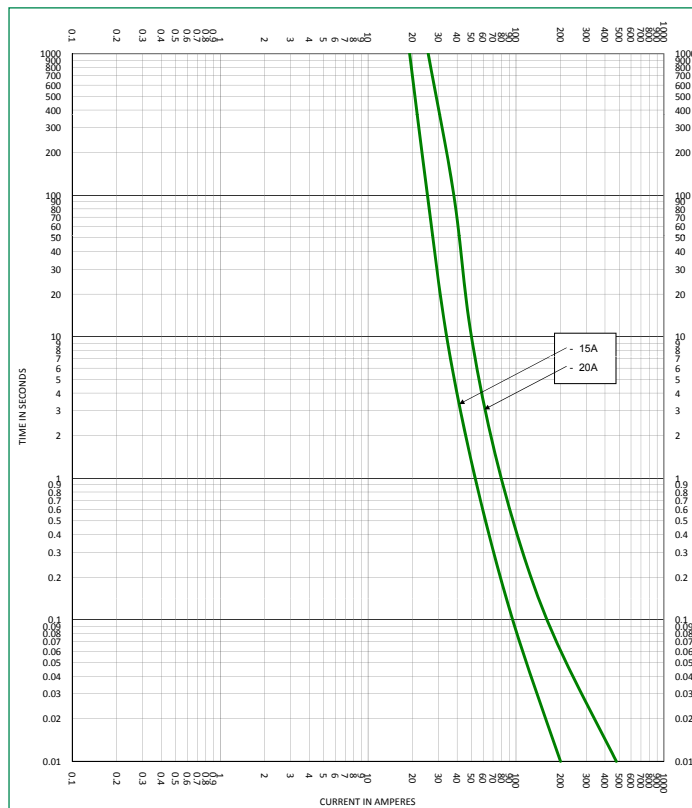

SPF SERIES SOLAR FUSES

Time Current Curve (25-30 A)

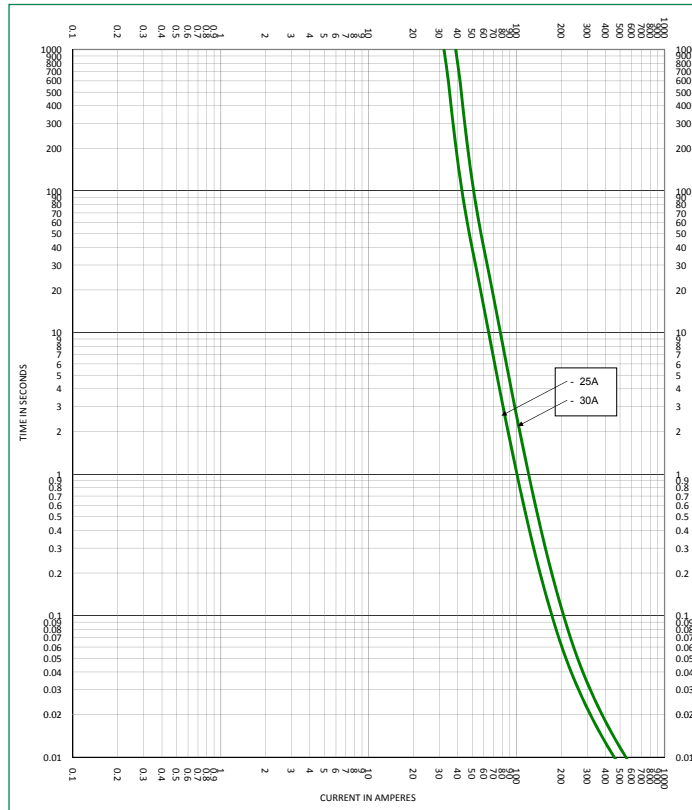

Disclaimer Notice - Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

Littelfuse.com/Product-Disclaimer

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)