


1. 適用範圍 / SCOPE

此份規格書僅涵蓋1206T系列產品。

This specification covers 1206T series devices, which is SMD Fuse.

2. 產品型號 / TYPE NUMBER

1206T	***A	***V	
(1)	(2)	(3)	(4)

(1) 系列號: 1206T (尺寸: 0.12×0.06; 熔斷特性:慢斷)

Series Number:1206F(Size: 0.12×0.06; Melting characteristic: Slo-Blo)

(2) 額定電流: (例如:3.15A=3.15安培)

Rating Current : (Ex. :3.15A = 3.15 Amperer)

(3) 額定電壓: (例如:063V=63伏特)


Rating Voltage : (Ex. :063V = 63 Volt)

(4) 安規認證 / Approval


3. 標示 / MARKING

標示 MARKING	N	P	Q	Q1	R	R1	S	T	T1
規格 Rating Current	800mA	1.0A	1.25A	1.5A	1.6A	1.75A	2.0A	2.5A	3.0A

標示 MARKING	U	U1	V	V1	W	W1	X	X1	Y	Z
規格 Rating Current	3.15A	3.5A	4.0A	4.5A	5.0A	6.0A	6.3A	7.0A	8.0A	10.0A

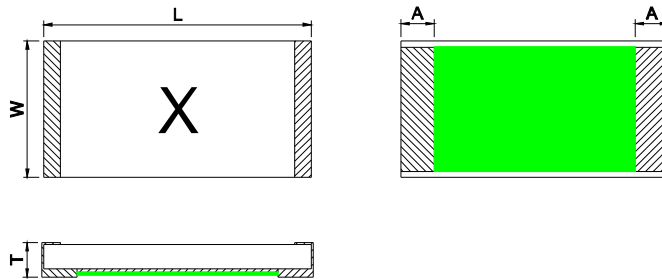4. 產品尺寸和結構 / SIZE AND STRUCTURE
4-1 尺寸 (單位: mm) / SIZE (Unit: mm)


型號 / Type number	w	L	T	A
1206T***A***V	1.60±0.20	3.20±0.20	0.60±0.15	0.58±0.20

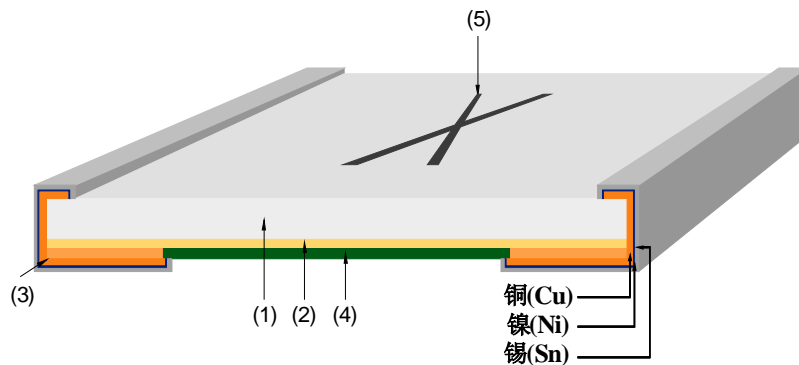4-2 產品結構及使用材料說明 / STRUCTURE & MATERIAL


編號 No.	元件 Component	材質 Material	數量 Quantity
(1)	基板 Substrate	氧化鋁陶瓷 Alumina Ceramic	1
(2)	電阻本體 Resistive element	銅/銀/錫 Cu / Ag / Sn	1
(3)	端電極 Terminal electrode	銅/鎳/錫 Cu / Ni / Sn	2
(4)	保護防焊層 Protective coating	防火級環氧樹脂 Flame-retardant epoxy	1
(5)	文印防焊層 Marking coating	防火級環氧樹脂 Flame-retardant epoxy	1


5. 電氣特性 / ELECTRICAL CHARACTERISTICS
5-1 額定電流和額定電壓 / RATED CURRENT AND RATED VOLTAGE

額定電流 RATED CURRENT	額定電壓 RATED VOLTAGE
800mA ~10.0A	63V DC

5-2 時間-電流特性 / Pre-Arcing Time-Current Characteristics (limits)

額定電流 RATED CURRENT	1.0In	2.0In	3.0In	8.0In	10.0In
800mA to 10A	4hrs min.	1sec min ; 120sec max.	0.1sec min ; 3sec max.	2ms min ; 50ms max.	0.2ms min ; 20ms max.

In : 25°C 下額定電流 / Rating Current at 25°C

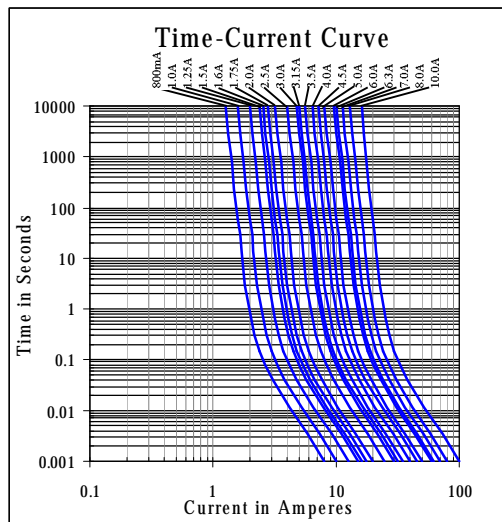時間-電流特性曲線 / Time-Current Curve:

5-3 分斷能力 / Breaking Capacity

額定電流 RATED CURRENT	分斷能力 BREAKING CAPACITY
800mA ~10.0A	V =63V DC ; I=50A

6. 產品特性及信賴性測試規範/PRODUCT CHARACTERISTICS AND RELIABILITY TEST STANDARD

序號 No.	項目 Item	內容 Contain	判定標準 Criteria
1	電壓降 Voltage drop	在測試板上的樣品，通以額定電流，待兩端電壓穩定後，量測其兩端的電壓 Voltage drop of specimen on board is measured by meter ; T= 23±5°C	電壓降不能超過規定值 Value of voltage of drop for specimen within specified IEC60127-1/-4
2	時間/電流特性 Time/current characteristics	分別通以1.0In、2.0In、3.0In、8.0In、10.0In電流，得出相對應的時間 I=1.0In ; 2.0In ; 3.0 In ; 8.0 In ; 10.0 In and measure the value of time individually by meter ,	各電流條件下的時間參數符合規定值 Value of time measured in different currents is within spec. UL248-1/-14
3	分斷能力測試 Breaking capacity	V = 63V/DC ; I=50A	沒有持續電弧、燃燒、爆炸現象 No a permanent arcing, ignition, bursting UL248-1/-14
4	絕緣阻抗 Insulation resistance	分斷能力測試後，在保險絲兩端通以2Un的直流電壓，持續時間為1min Specimen, breaking capacity finished ; V=2*Un/DC ; t=1 min	阻抗值不能小於0.1MΩ Rin ≥ 0.1MΩ IEC60127-1/-4
5	耐久測試 Endurance tests	I= 1*In, ton=1hr, toff=15min, 100循環。 I= 1*In, ton=1hr, toff=15min, 100cycles。	保險絲不能斷開 Specimen can't be opened IEC60127-1/-4
6	最大持續功耗 Max.sustained dissipation	樣品在耐久測試後通以1.25In，在一小時結束時最後十分鐘內測出電壓降，乘以當時的電流計算出其值 Specimen, endurance test is finished I=1.25In, t=1hr, find V from last 10min On and get P=V*I	持續功耗值符合規定值 P is within spec. IEC60127-1/-4


7. 環境特性 / ENVIRONMENTAL CHARACTERISTIC

7-1 操作溫度範圍: -55°C ~ 150°C / Operating Temperature: -55°C ~ 150°C

若貴司操作環境溫度超出 $25 \pm 5^\circ\text{C}$ 範圍，在選用保險絲規格時，需考慮操作環境溫度對保險絲的影響。請參照：溫度-電流曲線圖。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from $20 \sim 30^\circ\text{C}$, you should consider the environmental temperature's affection to fuses. please refer:

Temperature-Current curve:

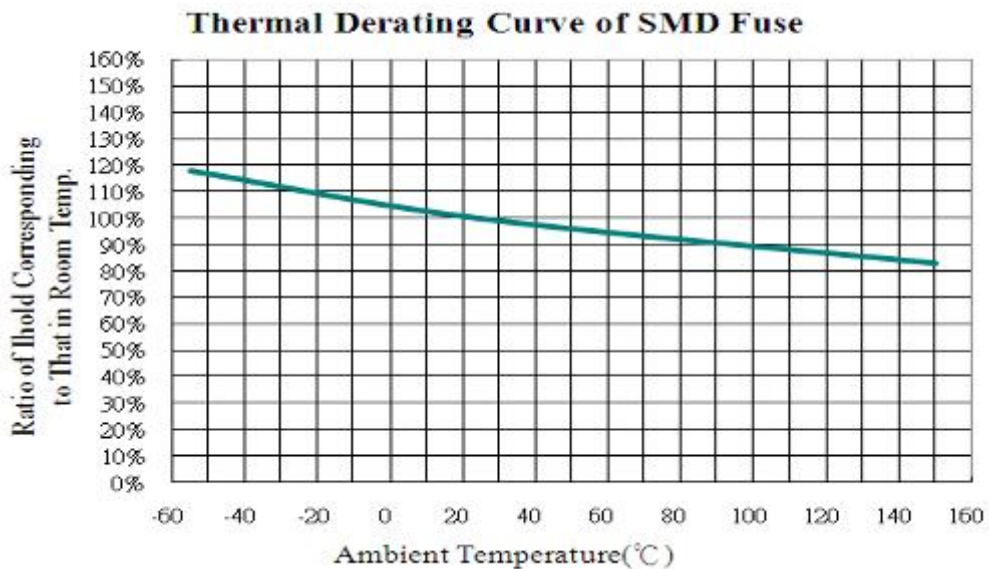

7-2 存儲條件 / Storage Conditions

在溫度 $10^\circ\text{C} \sim 40^\circ\text{C}$ 、相對濕度 $\leq 75\%$ 的密閉條件下可存放2年。

Under airtight in temperature $10^\circ\text{C} \sim 40^\circ\text{C}$ 、relative humidity $\leq 75\%$ can store 3 years.

在溫度 $10^\circ\text{C} \sim 40^\circ\text{C}$ 、相對濕度為95%的非露天下最多可存放30天。


Without dew in temperature $10^\circ\text{C} \sim 40^\circ\text{C}$ 、relative humidity be 95% maximum value for 30days.

8. 焊墊尺寸及焊接條件 / SOLDER PAD SIZE AND WELDING CONDITIONS

8-1 焊墊尺寸建議 / Recommended Size of the Pad.

L	W	D	t
4.76mm	2.00mm	1.78mm	≥ 35μm

t : 元件焊墊金屬層厚度 (min.) / t : Thickness of pad metal (min.)

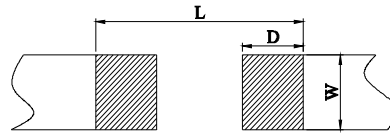

8-2 焊接參數建議 / Recommended Customer Soldering Parameters

溫度曲線 Temperature Condition

預熱段 : 145 ± 15°C, max. 120 sec.


Preheating : 145 ± 15°C, max. 120 sec.

焊錫段 : min. 220°C, max. 60 sec.

Soldering: min. 220°C, max. 60 sec.

允許最高溫度 : 260±5°C, max. 10sec.

Maximum temperature : 260±5°C, max. 10sec.

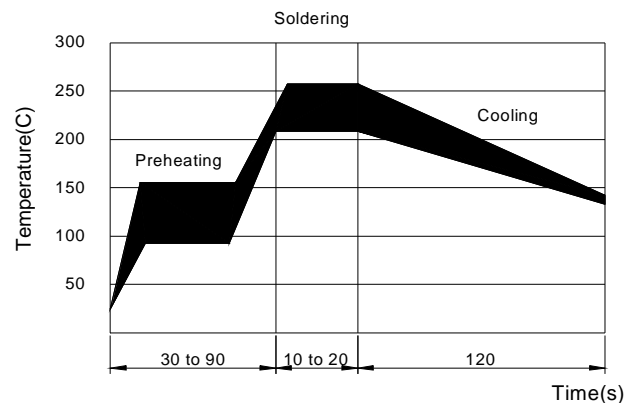

允許烙鐵焊接條件(熱風設備): 350°C, 3~5seconds

Rework Temperature (hot air equipment) : 350°C, 3~5seconds

8-3 焊接方法建議 / Recommended Reflow Methods

焊接熱源方式可用紅外線, 熱蒸氣, 熱風

IR, vapor phase oven, hot air oven.

如果焊錫溫度超過允許最高溫度, 則產品本身會有功能損壞的疑慮

If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

9. 批量生產出貨測試項目 / LOT ACCEPTANCE TEST REQUIREMENTS

9-1 外觀 / Visual

方法：利用放大鏡進行檢查

Procedure: Visual

標準：不能有髒污、不潔、文印錯誤、破損等

Acceptance Criteria: No parts are outstandingly stained.

9-2 尺寸 / Dimensions

方法：使用合適且經校正的尺規

Procedure: As appropriate, calipers, micrometers, optical comparator, or approved gages.

標準：尺寸均在規定標準範圍內

Acceptance Criteria: No parts outside specific dimensions.

9-3 時間-電流特性 / Time-Current Characteristics

方法：測試電流 $I=1.0I_n$; $2.0I_n$; $3.0I_n$; $8.0I_n$; $10.0I_n$,量測出個別電流下的對應時間

Procedure : $I=1.0I_n$; $2.0I_n$; $3.0I_n$; $8.0I_n$; $10.0I_n$ and measure the value of time individually by meter at 25°C

標準：對應時間值均在規定標準範圍內

Acceptance Criteria: All parts must within the specific .

9-4 分斷能力 / Breaking Capacity

方法：測試電壓\電流為 $V = 63\text{V}/\text{DC}$; $I=50\text{A}$, 利用此條件衝擊元件

Procedure: $V = 63\text{VDC}$; $I=50\text{A}$

標準：元件不發生持續電弧燃燒及爆裂

Acceptance Criteria: No permanent arcing, ignition, bursting

10. 安全認證及編號 / STANDARDS AND APPROVALS



	E56092
---	--------

11. 包裝訊息 / PACKING INFORMATION

11-1 包裝數量、重量 / QUANTITY & WEIGHT

型號 Type Number	數量 (pcs) Quantity(pcs)	重量(g) Weight(g)
1206T	5,000	131±10

11-2 捲輪規格 / Reel & Tape specifications

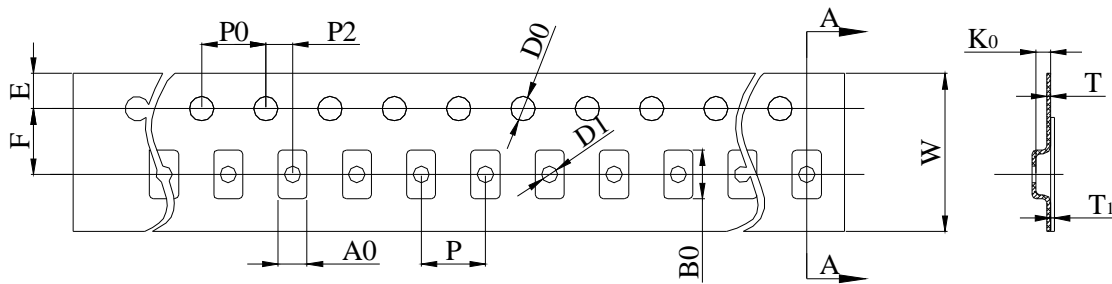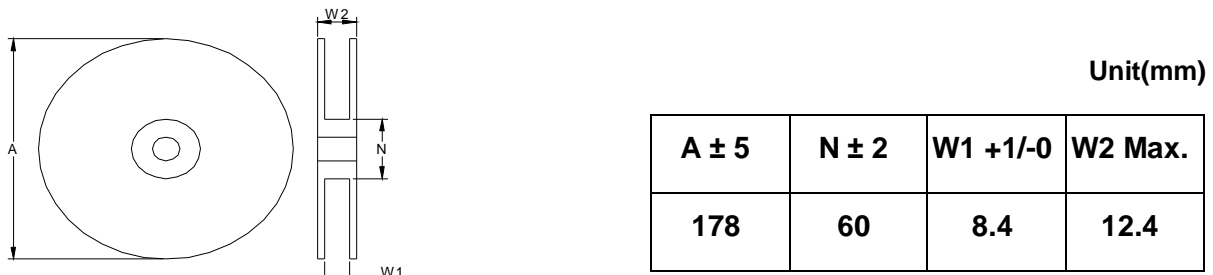


Unit(mm)

W	8.00 ± 0.30	D0	1.50 ± 0.10
P0	4.00 ± 0.10	F	3.50 ± 0.10
P	4.00 ± 0.10	E	1.75 ± 0.10
P2	2.00 ± 0.10	T	0.20 ± 0.05
A0	1.82 ± 0.15	T1	Max. 0.1
B0	3.53 ± 0.15	K0	0.85 ± 0.15

11-3 密封膠膜剝離強度要求 / Peeling Strength of Seal Tape

F = 剝離強度 : 0.3 – 1.0N (30 - 100gf)
F = Peeling Strength: 0.3 – 1.0N (30 - 100gf)

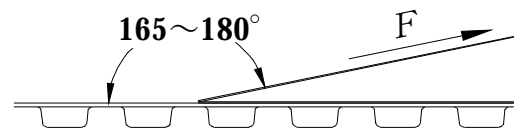

12. 其他 / OTHERS

12-1 如果在使用中有超出本規格書的要求，必須經由雙方協商確認。

In the event that an impropriety is found beyond this specification ,it shall be fixed by mutual agreement between the parties.

12-2 如果本規格書有不適當的情況，必須通過雙方協商並由本公司修改。

In the event that an impropriety is found in this specification , WALTER ELECTRONIC CO., LTD. shall amend it by mutual agreement between the parties.

版次	製作	確認	審核
第一版	Solomon	Qiang	Andrew 2012/6/30



JDYX2.E56092 Fuses, Supplemental - Component

Page Bottom

Fuses, Supplemental - Component

See General Information for Fuses, Supplemental - Component

WALTER ELECTRONIC CO LTD

E56092

2ND FL

97 CHUNG KING N RD, SEC 4

TAIPEI CITY, TAIWAN

Supplemental fuses

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
FSC	5.2 x 20 (0.20 x 0.79)	0.25 - 6.3	250Vac	1500
		0.25 - 6.3	125Vac	10000
		0.25 - 6.3	125Vdc	35
		8 - 15	250Vac	1500
FSD	5.2 x 20 (0.20 x 0.79)	0.2 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.2 - 6.3	125Vdc	35
		0.2 - 6.3	125Vac	10000
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
MGF	6.35 x 31.5 (0.25 x 1.24)	0.125 - 10	125Vac	10000
		3.1 - 10	250Vac	200
MTG	6.35 x 31.75 x 2.8 (0.25 x 1.25 x 0.11)	10 - 20	250Vac	300
SGF	5.2 x 20 (0.20 x 0.79)	0.25 - 0.8	125Vac	10000
		0.25 - 0.8	250Vac	35
		1.0 - 2.0	125Vac	10000
		1.0 - 2.0	250Vac	100
		3.0 - 3.5	125Vac	10000
		3.0 - 3.5	250Vac	100
		4.0 - 7.0	125Vac	10000
TBP	3.6 x 9.5 (0.14 x 0.37)	0.25 - 3.15	250Vac	35

		0.25 - 3.15	63Vdc	35
		4 - 6.3	250Vac	10x Ampere rating
		4 - 6.3	63Vdc	10x Ampere rating
TMD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		0.1 - 6.3	125Vdc	35
		0.1 - 6.3	125Vac	10000
		3.6 - 6.3	250Vac	10x Ampere rating
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
TME	5.2 x 20 x 2.8 (0.20 x 0.79 x 0.11)	0.1 - 16	250Vac	150
TSC	5.2 x 20 (0.20 x 0.79)	0.2 - 6.3	250Vac	1500
		0.2 - 6.3	125Vac	10000
		0.2 - 6.3	125Vdc	35
		8 - 10	250Vdc	1500
		12 - 15	250Vdc	1500
TSD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.1 - 6.3	125Vac	10000
		0.1 - 6.3	125Vdc	35
TSM	6.8 x 4.0 x 2.8 (0.27 x 0.16 x 0.11)	1 - 5	63Vdc	50
		1 - 5	125Vac	50

Supplemental fuses: pigtail leads

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
FSC	5.2 x 20 (0.20 x 0.79)	0.25 - 6.3	250Vac	1500
		0.25 - 6.3	125Vac	10000
		0.25 - 6.3	125Vdc	35
		8 - 15	250Vac	1500
FSD	5.2 x 20 (0.20 x 0.79)	0.2 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.2 - 6.3	125Vdc	35
		0.2 - 6.3	125Vac	10000
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
MFP	6.35 x 31.5 (0.25 x 1.24)	0.125 - 3	125Vac	10000

		0.125 - 3	250Vac	100
		3.1 - 10	250Vac	200
SFP	5.2 x 20 (0.20 x 0.79)	0.25 - 0.8	125Vac	10000
		0.25 - 0.8	250Vac	35
		1.0 - 2.0	125Vac	10000
		1.0 - 2.0	250Vac	100
		3.0 - 3.5	125Vac	10000
		3.0 - 3.5	250Vac	100
		4.0 - 7.0	125Vac	10000
TMD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		0.1 - 6.3	125Vdc	35
		0.1 - 6.3	125Vac	10000
		3.6 - 6.3	250Vac	10x Ampere rating
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
TME	5.2 x 20 x 2.8 (0.20 x 0.79 x 0.11)	0.1 - 16	250Vac	150
TSC	5.2 x 20 (0.20 x 0.79)	0.2 - 6.3	250Vac	1500
		0.2 - 6.3	125Vac	10000
		0.2 - 6.3	125Vdc	35
		8 - 10	250Vdc	1500
		12 - 15	250Vdc	1500
TSD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.1 - 6.3	125Vac	10000
		0.1 - 6.3	125Vdc	35
TSS	5.6 x 19.5 x 2.8 (0.22 x 0.77 x 0.11)	3.15 - 4	125Vac	10000
		3.15 - 4	250Vac	1500
		3.15 - 4	125Vdc	35

Supplemental micro fuses

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
F92, 1206T	3.2 x 1.6 x 0.6 (0.13 x 0.06 x 0.02)	0.8 - 10.0	63Vdc	50
F93, 1206F	3.2 x 1.6 x 0.6 (0.13 x 0.06 x 0.02)	0.5 - 0.8	125Vdc	50
		1.0 - 10.0	63Vdc	50
J93, 0603F	1.6 x 0.8 x 0.6 (0.06 x 0.03 x 0.02)	0.5 - 0.8	125Vdc	50

1.0 - 6.0	63Vdc	50
-----------	-------	----

Supplemental micro fuses: pigtail leads

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
2000	-	0.1 - 0.2	250Vac	100
		0.1 - 0.2	300Vac	100
		0.25 - 0.5	250Vac	100
		0.25 - 0.5	300Vac	100
		0.63 - 3.15	250Vac	100
		0.63 - 3.15	300Vac	100
		4 - 6.3	250Vac	100
		4 - 6.3	300Vac	100
2010	-	0.1 - 0.2	250Vac	130
		0.1 - 0.2	300Vac	50
		0.25 - 0.5	250Vac	130
		0.25 - 0.5	300Vac	50
		0.63 - 3.15	250Vac	130
		0.63 - 3.15	300Vac	50
		4 - 6.3	250Vac	130
		4 - 6.3	300Vac	50
FEP	3.7 x 8.0 x 2.8 (0.15 x 0.31 x 0.11)	0.25 - 6.3	250Vac	50
TEP	3.7 x 8.0 x 2.8 (0.15 x 0.31 x 0.11)	0.25 - 3.15	250Vac	35
		4.0	250Vac	40
		5.0	250Vac	50
		6.3	250Vac	63



Marking: Company name or tradename "Walter" or trademark and model designation.
 Last Updated on 2012-05-29

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

2012 UL LLC

When the UL Leaf Mark is on the product, or when the word "Environment" is included in the UL Mark, please search the [UL Environment database](#) for additional information regarding this product's certification.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2012 UL LLC".



JDYX8.E56092

Fuses, Supplemental Certified for Canada - Component

Page Bottom

Fuses, Supplemental Certified for Canada - Component

See General Information for Fuses, Supplemental Certified for Canada - Component

WALTER ELECTRONIC CO LTD

E56092

2ND FL

97 CHUNG KING N RD, SEC 4

TAIPEI CITY, TAIWAN

Supplemental fuses

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
FSC	5.2 x 20 (0.20 x 0.79)	0.25 - 6.3	250Vac	1500
		0.25 - 6.3	125Vac	10000
		0.25 - 6.3	125Vdc	35
		8 - 15	250Vac	1500
FSD	5.2 x 20 (0.20 x 0.79)	0.2 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.2 - 6.3	125Vdc	35
		0.2 - 6.3	125Vac	10000
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
MGF	6.35 x 31.5 (0.25 x 1.24)	0.125 - 10	125Vac	10000
		3.1 - 10	250Vac	200
MTG	6.35 x 31.75 x 2.8 (0.25 x 1.25 x 0.11)	10 - 20	250Vac	300
SGF	5.2 x 20 (0.20 x 0.79)	0.25 - 0.8	125Vac	10000
		0.25 - 0.8	250Vac	35
		1.0 - 2.0	125Vac	10000
		1.0 - 2.0	250Vac	100
		3.0 - 3.5	125Vac	10000
		3.0 - 3.5	250Vac	100
		4.0 - 7.0	125Vac	10000
TBP	3.6 x 9.5 (0.14 x 0.37)	0.25 - 3.15	250Vac	35

		0.25 - 3.15	63Vdc	35
		4 - 6.3	250Vac	10x Ampere rating
		4 - 6.3	63Vdc	10x Ampere rating
TMD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		0.1 - 6.3	125Vdc	35
		0.1 - 6.3	125Vac	10000
		3.6 - 6.3	250Vac	10x Ampere rating
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
TME	5.2 x 20 x 2.8 (0.20 x 0.79 x 0.11)	0.1 - 16	250Vac	150
TSC	5.2 x 20 (0.20 x 0.79)	0.2 - 6.3	250Vac	1500
		0.2 - 6.3	125Vac	10000
		0.2 - 6.3	125Vdc	35
		8 - 10	250Vdc	1500
		12 - 15	250Vdc	1500
TSD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.1 - 6.3	125Vac	10000
		0.1 - 6.3	125Vdc	35
TSM	6.8 x 4.0 x 2.8 (0.27 x 0.16 x 0.11)	1 - 5	63Vdc	50
		1 - 5	125Vac	50

Supplemental fuses: pigtail leads

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
FSC	5.2 x 20 (0.20 x 0.79)	0.25 - 6.3	250Vac	1500
		0.25 - 6.3	125Vac	10000
		0.25 - 6.3	125Vdc	35
		8 - 15	250Vac	1500
FSD	5.2 x 20 (0.20 x 0.79)	0.2 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.2 - 6.3	125Vdc	35
		0.2 - 6.3	125Vac	10000
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
MFP	6.35 x 31.5 (0.25 x 1.24)	0.125 - 3	125Vac	10000

		0.125 - 3	250Vac	100
		3.1 - 10	250Vac	200
SFP	5.2 x 20 (0.20 x 0.79)	0.25 - 0.8	125Vac	10000
		0.25 - 0.8	250Vac	35
		1.0 - 2.0	125Vac	10000
		1.0 - 2.0	250Vac	100
		3.0 - 3.5	125Vac	10000
		3.0 - 3.5	250Vac	100
		4.0 - 7.0	125Vac	10000
TMD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		0.1 - 6.3	125Vdc	35
		0.1 - 6.3	125Vac	10000
		3.6 - 6.3	250Vac	10x Ampere rating
		8 - 15	125Vac	10x Ampere rating
		8 - 15	250Vac	10x Ampere rating
TME	5.2 x 20 x 2.8 (0.20 x 0.79 x 0.11)	0.1 - 16	250Vac	150
TSC	5.2 x 20 (0.20 x 0.79)	0.2 - 6.3	250Vac	1500
		0.2 - 6.3	125Vac	10000
		0.2 - 6.3	125Vdc	35
		8 - 10	250Vdc	1500
		12 - 15	250Vdc	1500
TSD	5.2 x 20 (0.20 x 0.79)	0.1 - 3.5	250Vac	35
		3.6 - 6.3	250Vac	10x Ampere rating
		0.1 - 6.3	125Vac	10000
		0.1 - 6.3	125Vdc	35
TSS	5.6 x 19.5 x 2.8 (0.22 x 0.77 x 0.11)	3.15 - 4	125Vac	10000
		3.15 - 4	250Vac	1500
		3.15 - 4	125Vdc	35

Supplemental micro fuses


Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
F92, 1206T	3.2 x 1.6 x 0.6 (0.13 x 0.06 x 0.02)	0.8 - 10.0	63Vdc	50
F93, 1206F	3.2 x 1.6 x 0.6 (0.13 x 0.06 x 0.02)	0.5 - 0.8	125Vdc	50
		1.0 - 10.0	63Vdc	50
J93, 0603F	1.6 x 0.8 x 0.6 (0.06 x 0.03 x 0.02)	0.5 - 0.8	125Vdc	50


1.0 - 6.0	63Vdc	50
-----------	-------	----

Supplemental micro fuses: pigtail leads

Cat. No.	Size mm(in)	Amps (A)	Volts (V)	Interrupting Rating (A)
2000	-	0.1 - 0.2	250Vac	100
		0.1 - 0.2	300Vac	100
		0.25 - 0.5	250Vac	100
		0.25 - 0.5	300Vac	100
		0.63 - 3.15	250Vac	100
		0.63 - 3.15	300Vac	100
		4 - 6.3	250Vac	100
		4 - 6.3	300Vac	100
2010	-	0.1 - 0.2	250Vac	130
		0.1 - 0.2	300Vac	50
		0.25 - 0.5	250Vac	130
		0.25 - 0.5	300Vac	50
		0.63 - 3.15	250Vac	130
		0.63 - 3.15	300Vac	50
		4 - 6.3	250Vac	130
		4 - 6.3	300Vac	50
FEP	3.7 x 8.0 x 2.8 (0.15 x 0.31 x 0.11)	0.25 - 6.3	250Vac	50
TEP	3.7 x 8.0 x 2.8 (0.15 x 0.31 x 0.11)	0.25 - 3.15	250Vac	35
		4.0	250Vac	40
		5.0	250Vac	50
		6.3	250Vac	63



Marking: Company name or tradename "Walter" or trademark  , model designation and Recognized

Component Mark for Canada,  .
Last Updated on 2012-05-29

[Questions?](#) [Print this page](#) [Terms of Use](#) [Page Top](#)

2012 UL LLC

When the UL Leaf Mark is on the product, or when the word "Environment" is included in the UL Mark, please search the [UL Environment database](#) for additional information regarding this product's certification.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with

permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2012 UL LLC".

单击下面可查看定价，库存，交付和生命周期等信息

[>>Walter\(华德\)](#)