



SHP Coils

[RoHS Compliant]



Model	Rated current (A)	Inductance (μ H) at 50kHz		DC resistance (m Ω) max.	External dimensions D \times H (mm) max.	Diameter of magnetic wire (mm ϕ)	Temperature rise (K) *2
		min. at Idc	min. at Idc Rated *1				
SHP-012	1	4500	365 (490)	340	ϕ 24 \times 18	0.5	\leq 30
SHP-022	2	1500	115 (155)	110	ϕ 24 \times 18	0.7	\leq 30
SHP-032	3	1120	63 (85)	70	ϕ 25 \times 19	0.8	\leq 30
SHP-052	5	375	25 (35)	30	ϕ 27 \times 20	1.0	\leq 30
SHP-013	1	9000	675 (900)	500	ϕ 28 \times 19	0.5	\leq 30
SHP-023	2	4500	260 (350)	190	ϕ 29 \times 19	0.7	\leq 30
SHP-033	3	1120	95 (130)	80	ϕ 28 \times 18	0.8	\leq 30
SHP-053	5	750	48 (65)	50	ϕ 29 \times 20	1.0	\leq 30
SHP-034S	3	3750	215 (290)	130	ϕ 35 \times 21	0.8	\leq 40
SHP-054S	5	3750	135 (180)	85	ϕ 36 \times 21	1.0	\leq 40
SHP-104S	10	525	25 (35)	20	ϕ 37 \times 23	1.6	\leq 40

* Parenthesized values are examples of actually measured values.
 * 1: Temperature rise of Idc rated. • Cores insulation cap: polypropylene, A type insulation

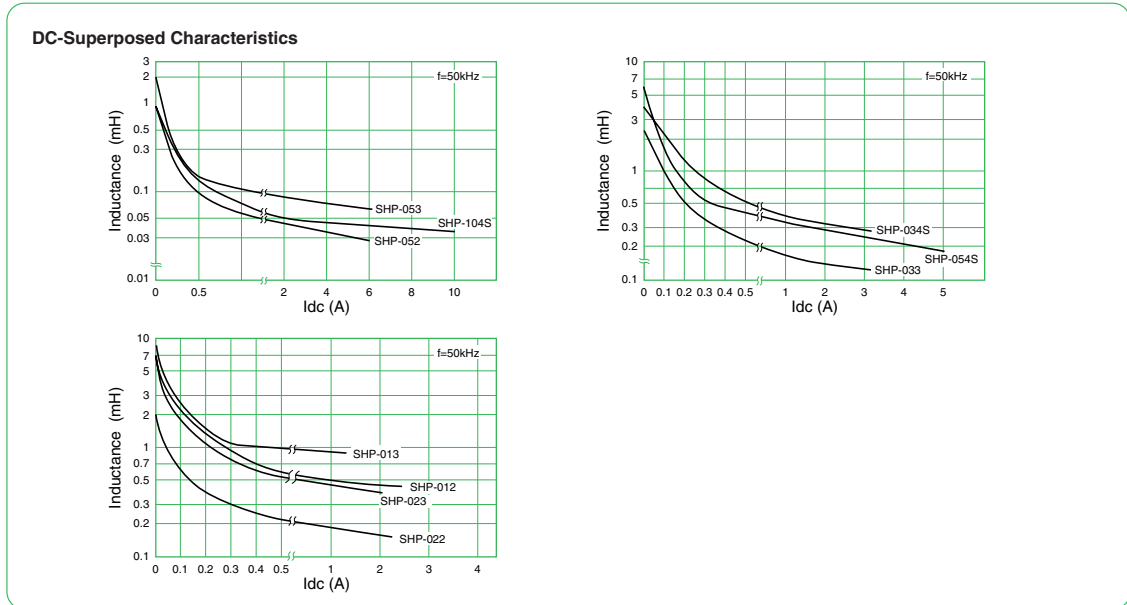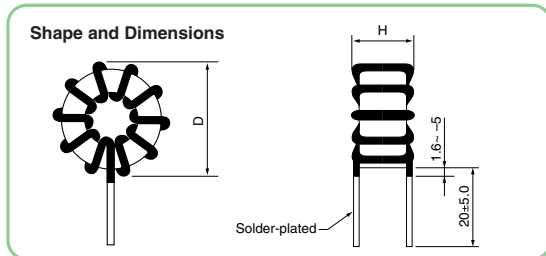

Choke Coils VOL.08



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)