


DCM Series

[RoHS Compliant]




- Tape and Reel Dimensions (see page 46)
- Precautions (see page 43)


Model	Rated voltage (V)	Rated current (A)	L (μ H) min	Rdc (m Ω) max	Type
DCM5-01	50	0.2	2540	3180	EE5
DCM5-02	50	0.5	520	510	EE5
DCM5-03	50	1.0	210	180	EE5
DCM5-04	50	2.0	30	30	EE5

- Inductance measurement condition : $f = 10\text{KHZ } 0.1\text{V}$ ※ ● Insulation resistance : more than 100M Ω (250V DC, 1min, between lines) ● Operating temperature range($^{\circ}\text{C}$) : -20 to 110(includes the selftemp.rise)
- Look : By number-of-turns adjustment, to products other than the above-mentioned characteristic is also possible, please consult.
- Common mode winding with section bobbin. ※ ● Withstanding voltase : 250V DC for one minute between lines.


Shape and Dimensions

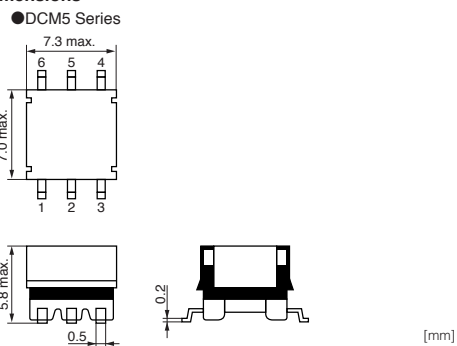


Recommended Land Pattern



Circuit Diagram



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

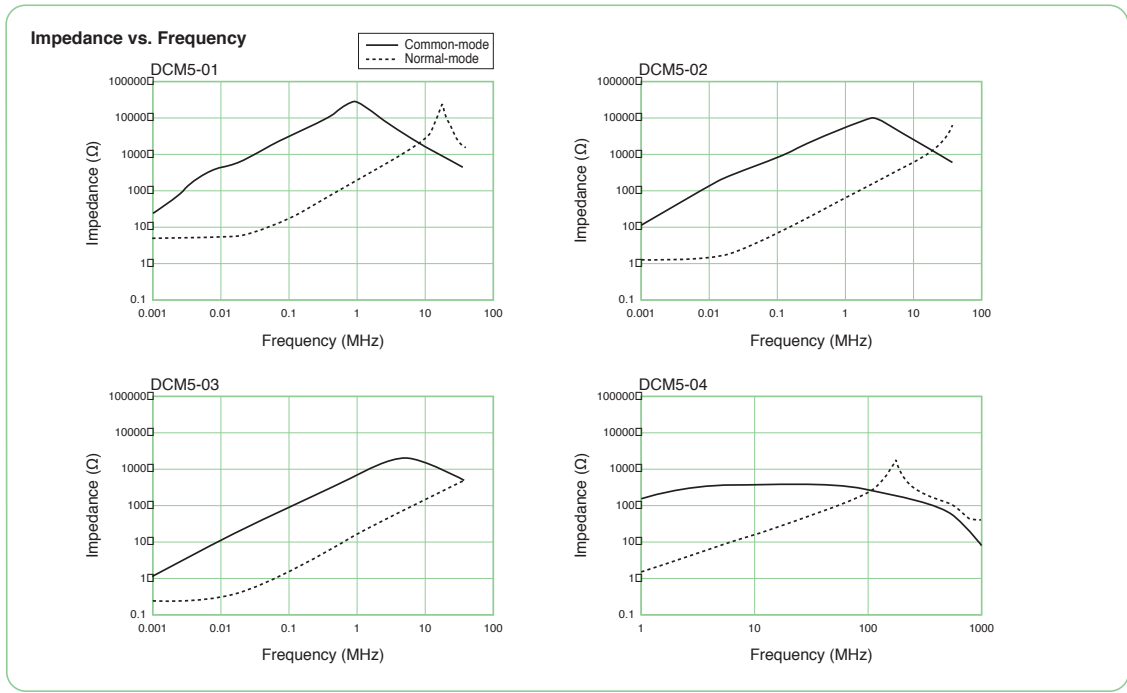

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

单击下面可查看定价，库存，交付和生命周期等信息

[>>KEMET\(基美\)](#)