

**GLASS PASSIVATED
BRIDGE RECTIFIERS**

**REVERSE VOLTAGE – 1000 Volts
FORWARD CURRENT – 1.0 Ampere**


FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- The plastic material has UL flammability classification 94-0

MECHANICAL DATA

- Case Material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)
- Lowest Body Profile, 1.45mm
- Polarity indicator: As marked on body
- Weight: 92.7 m grams

TD

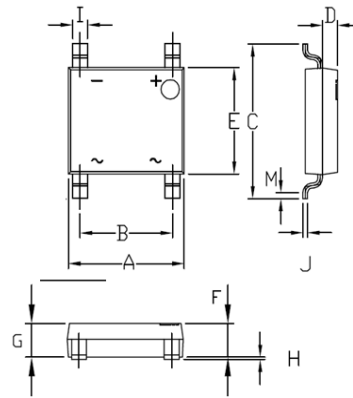

DIM.	MIN.	MAX.
A	4.90	5.10
B	3.95	4.05
C	6.30	6.45
D	0.60	0.70
E	4.30	4.5
F	1.4	1.6
G	1.35	1.45
H	0.05	0.15
I	0.60	0.70
J	0.15	0.25
M	0.30	0.60

All dimensions in mm.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	TD10M	UNIT
	Marking	TD1M	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	1000	V
Maximum RMS Voltage	V_{RMS}	700	V
Maximum DC Blocking Voltage	V_{DC}	1000	V
Maximum Average Forward Rectified Current @Tc = 110 °C	$I_{(AV)}$	1.0	A
Peak Forward Surge Current single half sine-wave @ Tj = 25 °C	I_{FSM}	30 60	A
Maximum Forward Voltage at 0.5A DC	V_F	0.95	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	10 150	uA
I ² t Rating for fusing (1ms < t < 8.3ms)	I ² t	3.74	A ² S
Typical Junction Capacitance (Note 1)	C _J	10	pF
Typical Thermal Capacitance (Note 2)	R _{θJC} R _{θJL} R _{θJA}	20 22 42	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C

Note :

- (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
- (2) Thermal Resistance test performed in accordance with JESD-51. Unit mounted on Aluminum substrate _ 15 x 15 x 1.6mm.

REV. 3, Oct-2012, KBDA09

FIG.1-FORWARD CURRENT DERATING CURVE

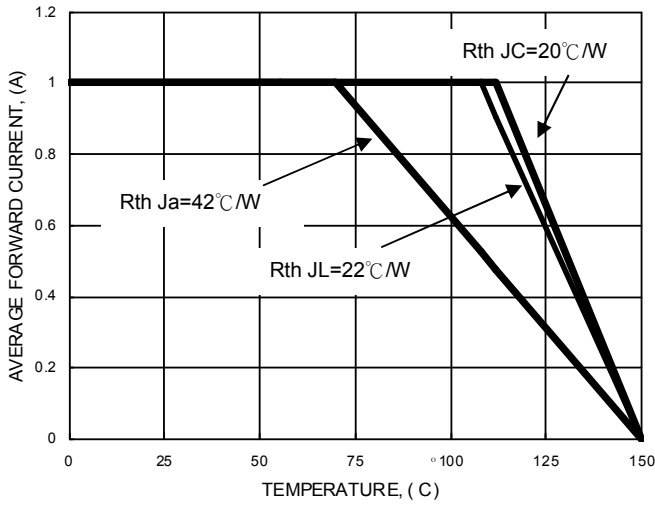


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

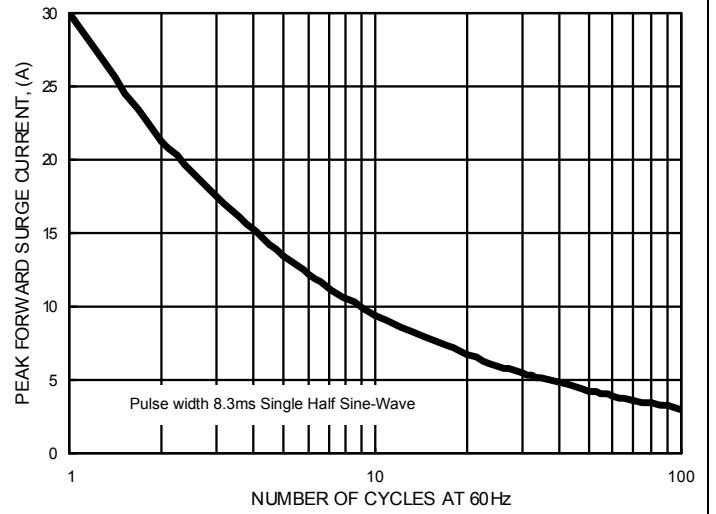


FIG.3- TYPICAL FORWARD CHARACTERISTICS

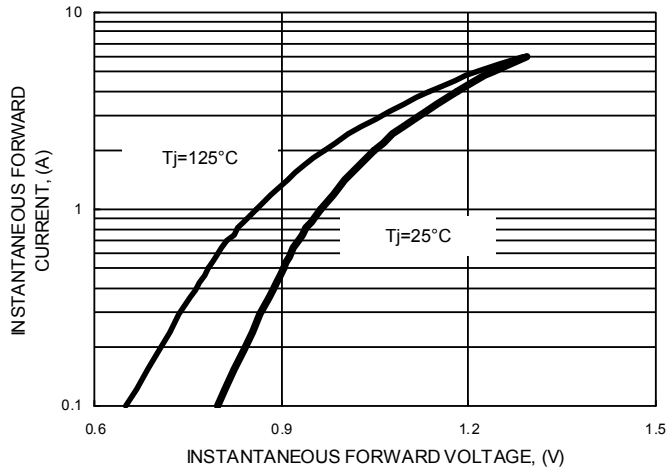


FIG.4- TYPICAL JUNCTION CAPACITANCE


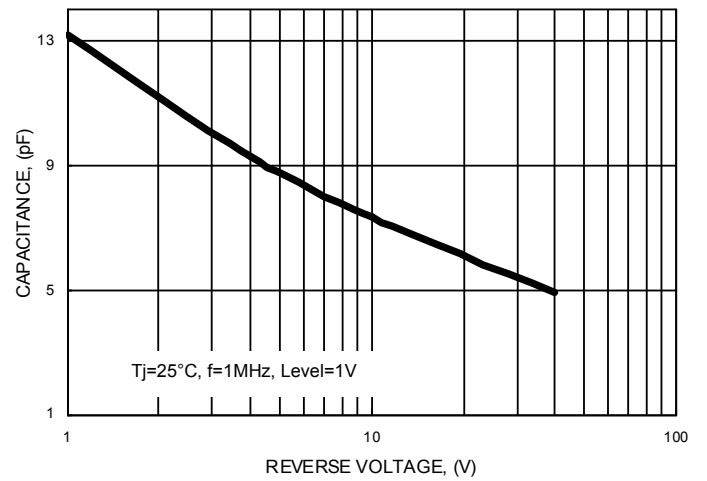


FIG.5- TYPICAL REVERSE CHARACTERISTICS

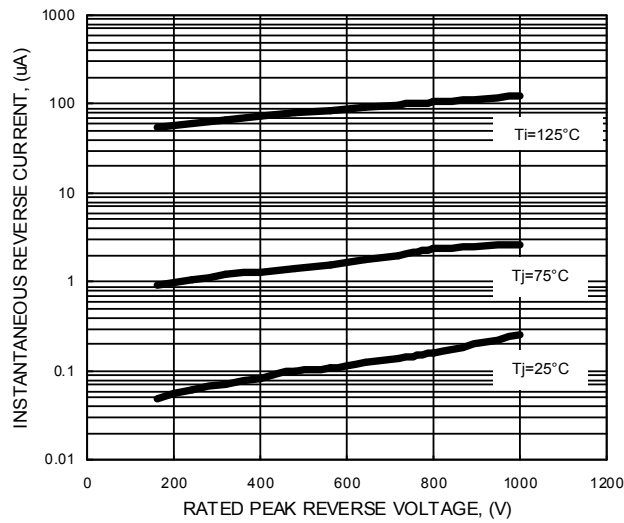

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Lite-On\(光宝\)](#)