






4

3

4

2

三 角 法 (THIRD ANGLE PROJECTION)

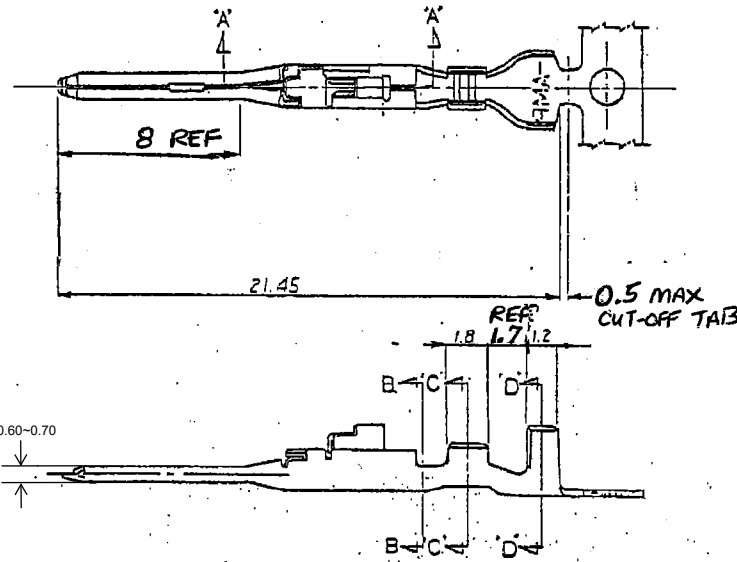

断面 B-B (SECT.)



断面 A-A (SECT.)

注: 1. 通用規格  
製品規格 108-5302  
取付通用規格 114-5142  
取扱説明書 IS-503J

NOTES: 1. APPLICABLE SPEC.  
PRODUCT SPEC. 108-5302  
APPLICATION SPEC. 114-5142  
2. INSTRUCTION SHEET IS-503J

	NYE製: 502H-20-UV (NYE: 502H-20-UV 117)カド才化処理 (APPLIED LUBRICANT OIL)	錫めっき黄銅 (PRE-TINNED BRASS)	175149-3
175153-2		錫めっき黄銅 (PRE-TINNED BRASS)	175149-2
175153-1		錫めっき黄銅合金 (PRE-TINNED COPPER ALLOY)	175149-1
バッチ端子型番 (L.P. P/N)	仕上 (FINISH)	材 料 (MATERIAL)	型番 (P/N)

		TE Connectivity	
線径 (WIRE RANGE)	絶縁径 (INSULATION DIA.)	品名 (TAB CONTACT AMP. UNIVERSAL POWER CONN.)	
0.12-0.35mm (AWG #26-#22)	1.2-2mm	77-コネクタ, アンプユニバーサルパワーコネクタ	
材質 (MATERIAL) 表参照	仕様 (SPEC.) 表参照	公差 (TOL.)	サイズ (SIZE) 表参照
C2 REV ECR M-006821	DR. M. P. 1994/04	1PC = ±0.2	B J C-175149
C1 REV PER ECO-11-005030	CHK. M. P. 1994/04	2PC = ±0.3	REV. C3
改訂履歴 (REVISION RECORD)	検査 (CHECK)	スケール (SCALE) 5-1	シート (SHEET)

寸法: H DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)