

INSULATION CRIMP

BARREL CRIMP

"G" DIM. WITH PIN AT	N / NO GO
N / GO	N / NO GO
.052	.072

"W" DIM.	GO NO GO
GO	NO GO
.091	.097


NOTE:  
PLUG GAGE TOOL FROM SIDE  
OPPOSITE INSULATION INSERTS

NOTE:  
"G" DIM. APPLIES AT CENTER OF "Y"  
NOTCH AS INDICATED ON DRAWING.

NOTE:  
TOOL SHOULD BE BOT TOMED, OR  
CLOSED, BEFORE PLUG GAGING.

NOTE:  
FOR REPLACEMENT OF PARTS  
OTHER THAN SNAP RINGS & PINS,  
TOOL SHOULD BE RETURNED TO OUR  
FACTORY TO INSURE PROPER CERTI-  
CRIMP ADJUSTMENT.

PLUG GAGE DIMENSIONS APPL. WHEN TOOL IS  
DETENDED BUT NOT UNDER PRESSURE.

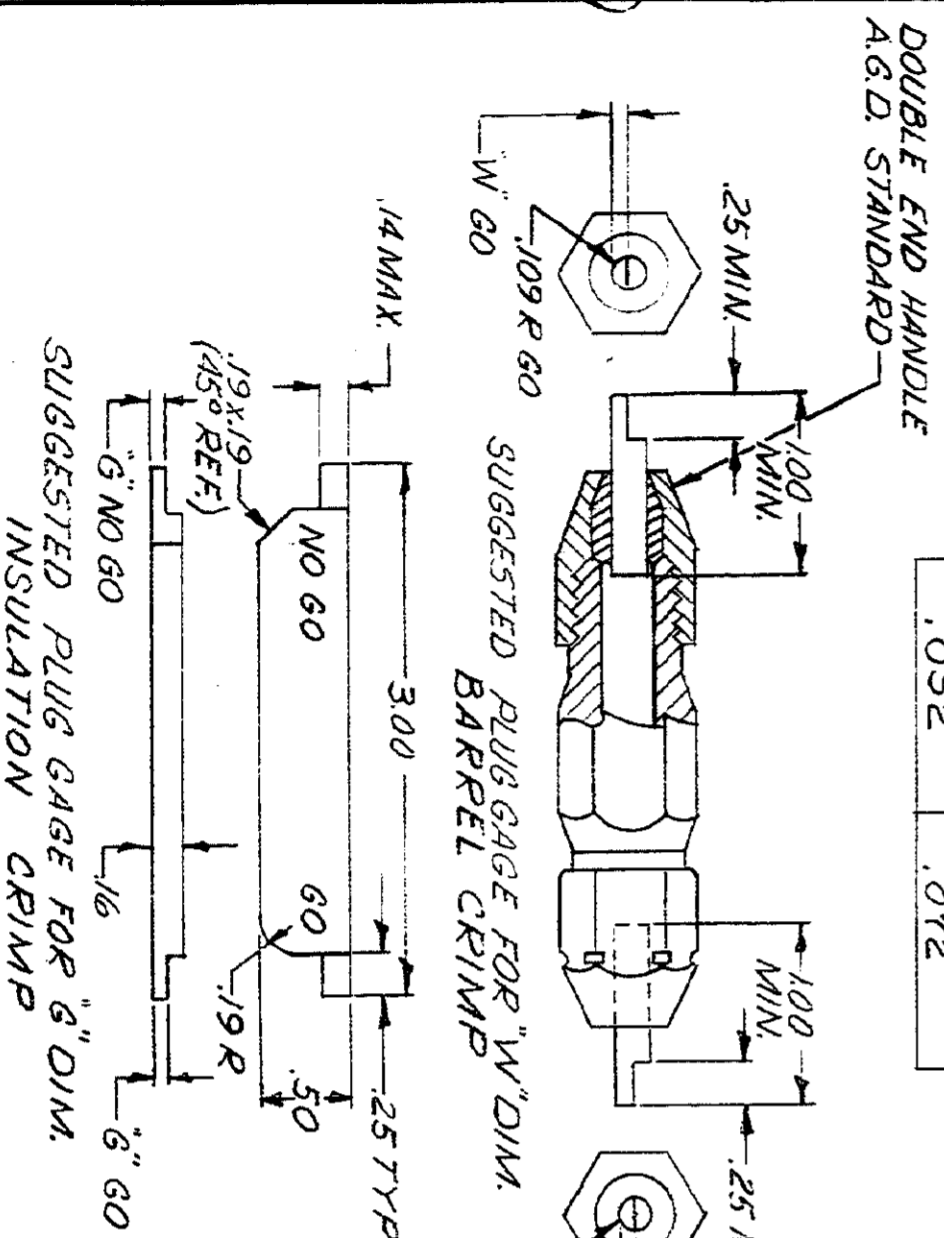

SUGGESTED PLUG GAGE FOR "G" DIM.  
INSULATION CRIMP

SUGGESTED  
BARREL CRIMP

REV	NO	DATE	BY	CHKD
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				

USED ON  
59461

DOUBLE END HANDLE  
A.G.D. STANDARD

MATERIAL:  
HEAT TREAT:

FINISH: ✓ EXCEPT AS NOTED:

LOC. 5124 M C	DR. R. VOLKSKIE ORD. 1.8. Foster	APP'D 5/15/59	DATE 5/15/59	SCALE 1:1	REV J-2
<p><b>CUSTOMER COPY REFERENCE ONLY</b></p> <p>© 1959 BY AMP INCORPORATED ALL RIGHTS RESERVED AND PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.</p>			<p>AMP INCORPORATED HARRISBURG, PENNA.</p> <p><b>HEAVY HEAD HAND TOOL ASSEMBLY</b></p> <p>CLASS. CHAIN TOOL &amp; HEAT RESISTANT TYPE W-DIAMOND GRIP STRAIGHTENER</p> <p>59461</p>		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)