


RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

NOTES:

1. MATERIAL:
 - 1.1 HOUSING: HALOGEN FREE PLASTICS, UL94V-0; COLOR:NATURE.
 - 1.2 CONTACT: COPPER ALLOY
2. FINISH:
 - 2.1 CONTACT: GOLD FLASH OVERALL. 50u" MIN. NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260° C PER ACES SPEC.
4. SPEC. PLS. REFER TO PS-50168-xxxx-xxx
5. PACKAGE PLS. REFER TO 50168-XXXX-TRP

6. PART NUMBER

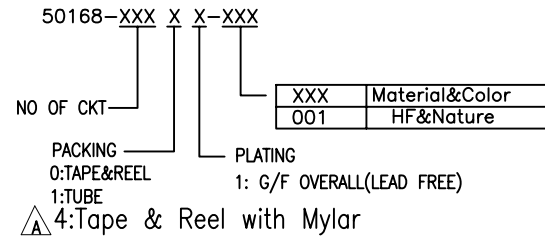

CKT	DIM A	DIM B	DIM C
50	12.00	12.50	15.50

一般公差 TOLERANCES X ±0.5 .XX ±0.15 X ±0.25 .XXX ±0.1 ANGLES ±2°		宏致電子股份有限公司 Aces Electronic Co.,Ltd.	
檢驗尺寸標示 SYMBOLS ⊕ ⊕ INDICATE CLASSIFICATION DIMENSION ⊕ MARK IS CRITICAL DIM. ⊕ MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm PITCH BTB PLUG CONN SMT D/R S/T MATED H=2.0mm 圖號 (DWG.NO) 50168-XXXX-XXX	制圖 (DR) 09/03/19 審核 (CHKD) SAM 核准 (APPD) JASON	1 OF 1 SIZE A4 REV A
表面處理 (FINISH)	比例 (SCALE) 8:1	單位 (UNITS) mm	圖號 (SHEET) 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)