

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05
WITHOUT BOSS

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05
WITH BOSS

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
- FINISH: 50u" MIN NICKEL UNDERPLATING OVERALL
 - GOLD FLASH
 - 15u" GOLD ON CONTACT
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50150-xxxxx-xxx
- PART NUMBER

50044-XXX X X-XXX

XXX	Color	Habgen Proc	Polarization	Packing
001	Black	HF	without boss	88062-XXXXCR
002	Black	HF	with boss	88062-XXXXBR
003	Black	HF	with boss	88062-XXXXB-05
004	Natural	HF	without boss	88062-XXXXCR



PLATING

- GOLD FLASH
- 15u" GOLD ON CONTACT

NO OF CKT

- PACKING
- TAPE REEL
 - TUBE PACKAGE

CKT	Dim A	Dim B	Dim C
16	3.5	5.5	7.5
20	4.5	6.5	8.5
30	7.0	9.0	11.0
40	9.5	11.5	13.5
50	12.0	14.0	16.0
60	14.5	16.5	18.5
70	17.0	19.0	21.0
80	19.5	21.5	23.5
100	24.5	26.5	28.5
120	29.5	31.5	33.5
160	39.5	41.5	43.5

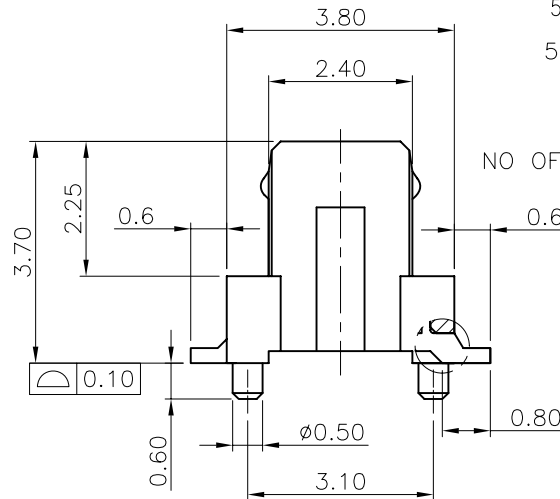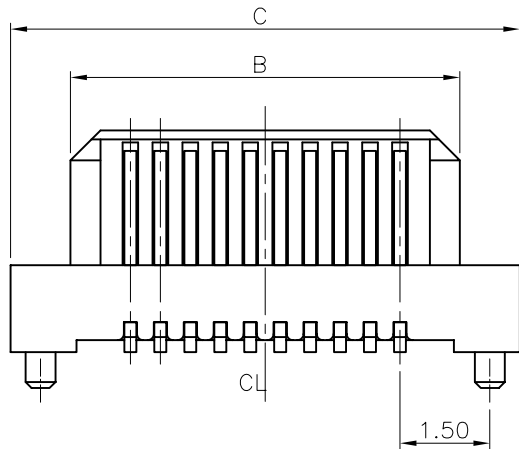

一般公差 TOLERANCES X ± 0.5 XX ± 0.15 X ± 0.25 XXX ± 0.1 ANGLES $\pm 2^\circ$		宏致電子股份有限公司 Aces Electronics Co.,Ltd.	
檢驗尺寸標示 SYMBOLS $\text{\textcircled{C}}$ $\text{\textcircled{D}}$ INDICATE CLASSIFICATION DIMENSION $\text{\textcircled{C}}$ MARK IS CRITICAL DIM. $\text{\textcircled{D}}$ MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm BTB D/R RCPT SMT S/T TYPE	製圖 (DR) '16/04/28 LIYAQIN 審核 (CHKD) BRAVE	圖號 (DWG NO.) 50044-XXXXX-XXX 核准 (APPD) FRANK
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1 圖號 (DWG NO.) 50044-XXXXX-XXX 核准 (APPD) FRANK

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)