


RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$   
WITHOUT BOSS

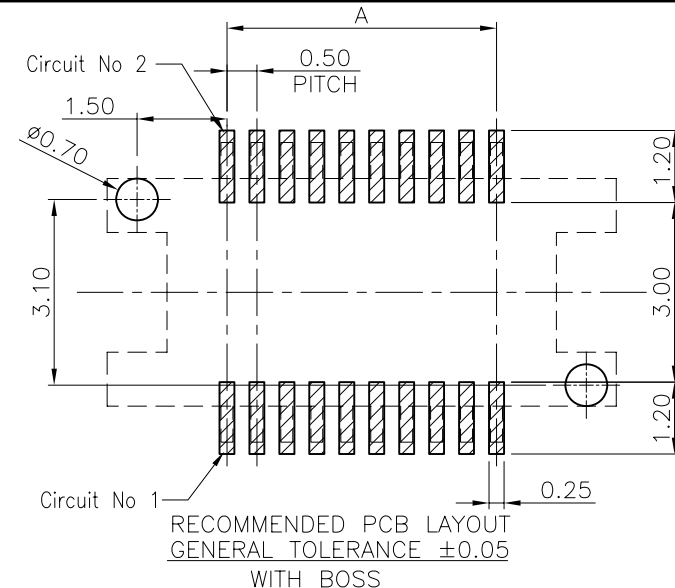

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE  $\pm 0.05$   
WITH BOSS

NOTES:

- MATERIAL:
  - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
  - CONTACT: COPPER ALLOY
- FINISH: 50u" MIN NICKEL UNDERPLATING OVERALL  
1:GOLD FLASH  
C:15u" GOLD ON CONTACT
- REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
- SPEC. PLS. REFER TO PS-50150-xxxxx-xxx
- PART NUMBER

50044-XXX X X-XXX



XXX	Color	Habgen Proc	Polarization	Packing
001	Black	HF	without boss	88062-XXXXCR
002	Black	HF	with boss	88062-XXXXBR
003	Black	HF	with boss	88062-XXXXB-05
004	Natural	HF	without boss	88062-XXXXCR

NO OF CKT

PLATING

- 1:GOLD FLASH  
C:15u" GOLD ON CONTACT
- PACKING  
0:TAPE REEL  
1:TUBE PACKAGE

CKT	Dim A	Dim B	Dim C
16	3.5	5.5	7.5
20	4.5	6.5	8.5
30	7.0	9.0	11.0
40	9.5	11.5	13.5
50	12.0	14.0	16.0
60	14.5	16.5	18.5
70	17.0	19.0	21.0
80	19.5	21.5	23.5
100	24.5	26.5	28.5
120	29.5	31.5	33.5
160	39.5	41.5	43.5

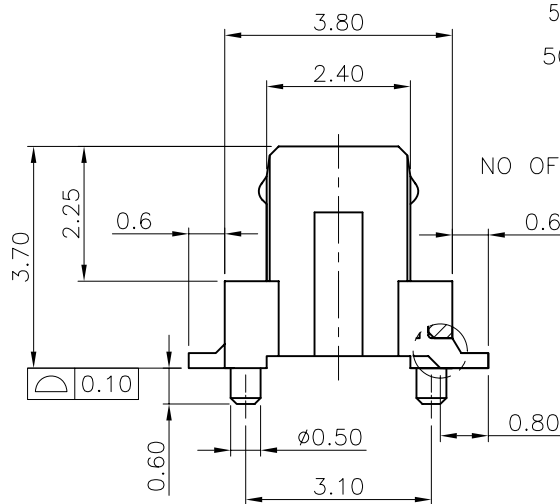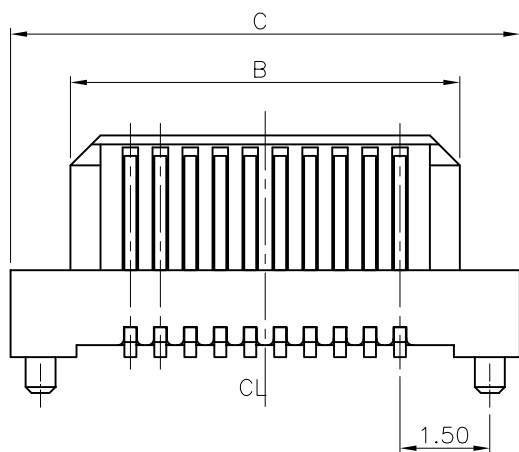

一般公差 <b>TOLERANCES</b> X $\pm 0.5$ XX $\pm 0.15$ X $\pm 0.25$ XXX $\pm 0.1$ ANGLES $\pm 2^\circ$		<b>宏致電子股份有限公司</b> <b>Aces Electronics Co.,Ltd.</b>	
檢驗尺寸標示 SYMBOLS $\odot$ $\ominus$ INDICATE CLASSIFICATION DIMENSION $\odot$ MARK IS CRITICAL DIM. $\ominus$ MARK IS MAJOR DIM.	品名 (TITLE) 0.5mm BTB D/R RCPT SMT S/T TYPE	製圖 (DR) '16/04/28 LIYAQIN 審核 (CHKD) BRAVE	圖號 (DWG NO.) 50044-XXXXX-XXX 核准 (APPD) FRANK
表面處理 (FINISH)	比例 (SCALE) 5:1	單位 (UNITS) mm	張數 (SHEET) 1 OF 1 圖號 (DWG NO.) 50044-XXXXX-XXX 圖號 (DWG NO.) 50044-XXXXX-XXX

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)