

PCB PATTERN LAYOUT
GENERAL TOLERANCE ± 0.05

- NOTES:
- MATERIAL:
 - HOUSING: HALOGEN FREE PLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
 - FITTING NAIL: COPPER ALLOY
 - FINISH:
 - CONTACT:
 - 50~100u" NICKEL UNDERPLATING OVERALL
 - 1:GOLD FLASH PLATING(1~3u")
 - N: 100~200u" MATT TIN PLATING
 - L: 100~200u" PURE TIN PLATING
 - P:GOLD FLASH(1~3U") ON CONTACT AND 80~150U" MATT TIN ON SOLDER
 - C:15u" GOLD ON CONTACT AND 80~150U" MATT TIN ON SOLDER
 - FITTING NAIL:
 - 50~100u" NICKEL UNDERPLATING OVERALL
 - 1:GOLD FLASH PLATING(1~3u")
 - N: 100~200u" MATT TIN PLATING
 - L: 100~200u" PURE TIN PLATING
 - REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.
 - SPEC. PLS. REFER TO PS-50305-XXXX-XXX
 - PACKAGE PLS. REFER TO 88289-XXXX-TRP
 - PART NUMBER



P/N LEGEND
50308-XXX X X-XXX

| XXX | Housing color | PACKING |
|-----|---------------|----------------|
| 001 | BLACK | 88289-XXXX-TRP |
| 002 | NATURAL | 88289-XXXX-TRP |

CKTS
Packing
0:TAPE & REEL
1:TUBE
4:Tape & Reel with Mylar

Plating
1:GOLD FLASH
L:PURE TIN LEAD FREE
N:MATT TIN LEAD FREE
P:GOLD FLASH(1~3U") ON CONTACT AND 80~150U" MATT TIN ON SOLDER
C:15u" GOLD ON CONTACT AND 80~150U" MATT TIN ON SOLDER

| CKT | Dim A | Dim B | Dim C | MYLAR |
|-----|-------|-------|-------|-------------|
| 2 | 2.0 | 8.0 | 4.9 | WTT12-50308 |
| 3 | 4.0 | 10.0 | 6.9 | |
| 4 | 6.0 | 12.0 | 8.9 | |
| 5 | 8.0 | 14.0 | 10.9 | |
| 6 | 10.0 | 16.0 | 12.9 | |
| 7 | 12.0 | 18.0 | 14.9 | |
| 8 | 14.0 | 20.0 | 16.9 | |
| 9 | 16.0 | 22.0 | 18.9 | |
| 10 | 18.0 | 24.0 | 20.9 | |
| 11 | 20.0 | 26.0 | 22.9 | |
| 12 | 22.0 | 28.0 | 24.9 | |
| 13 | 24.0 | 30.0 | 26.9 | |
| 14 | 26.0 | 32.0 | 28.9 | |
| 15 | 28.0 | 34.0 | 30.9 | |
| 16 | 30.0 | 36.0 | 32.9 | |
| 17 | 32.0 | 38.0 | 34.9 | |
| 18 | 34.0 | 40.0 | 36.9 | |
| 19 | 36.0 | 42.0 | 38.9 | |
| 20 | 38.0 | 44.0 | 40.9 | |

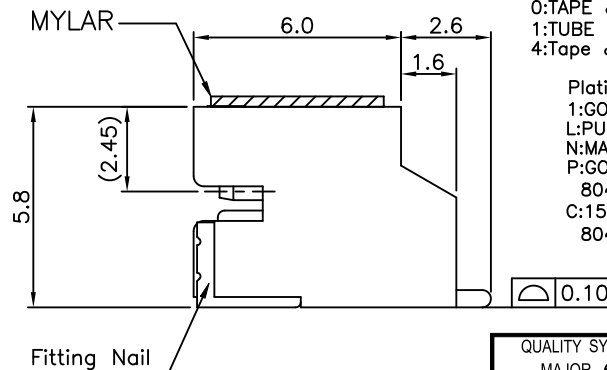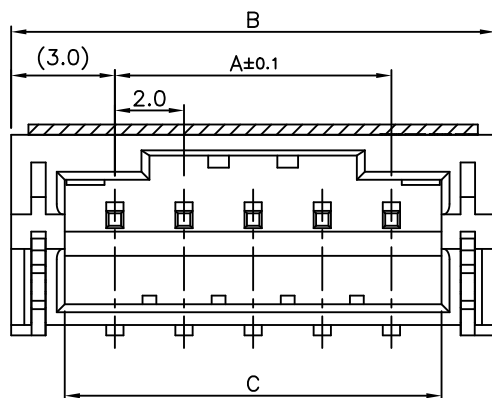

| QUALITY SYMBOLS | DRAWN BY | DATE | |
|---------------------------------------|---------------|-----------|--------------------------|
| MAJOR (M) | Xu,Zhonglin | 20/10/30 | |
| CRITICAL (C) | Lu, Jing Quan | 20/10/30 | |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | APPROVED BY | DATE | TITLE |
| X. ± 0.5 | hsieh, fu yu | 20/10/30 | 2.0mm WTB HEADER SMT R/A |
| .X ± 0.25 | | | S/R H=5.8mm TYPE |
| .XX ± 0.15 | UNITS | SIZE | DWG NO. |
| .XXX ± 0.1 | mm | A4 | N/A |
| ANGLES $\pm 2^\circ$ | SCALE | SHEET NO. | REV |
| | 5 : 1 | 1 OF 1 | PART NO. |
| | | | 50308-XXXX-XXX |

单击下面可查看定价，库存，交付和生命周期等信息

[>>ACES\(宏致\)](#)