

PRODUCT  
DATASHEET




**SMFS1206 Series Surface Mount Fuses Devices**

## SMFS1206 Series Surface Mount Fuses Devices

### Description

Polytronics SMFS1206 series surface mount slow-blow fuse utilizes thick film process with extremely stable fusing element. The glass over coating can tolerate higher temperature profile, and the non-flammable ceramic substrate offers better heat conductivity and safety. SMFS1206 series is also RoHS compliant and halogen-free to meet global environmental standard

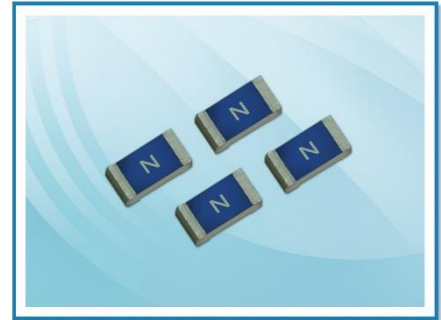




### Features

- Slow-blow
- Compact size
- Thick film manufacturing method
- Ceramic substrate with silver fusing element
- Excellent environmental integrity


### Application

- Battery pack
- Digital camera
- Game equipment
- Wireless base station
- LCD monitors and modules
- PC related equipment / peripherals
- Power supply
- Medical device

### Agency Approval and Environmental Compliance

Agency	File Number	Regulation	Standard
	UL/CSA:E331807		2011/65/EU
			IEC 61249-2-21:2003

### Electrical Characteristics

Part Number	Marking	Current Rating (A)	Voltage Rating	Interrupting Rating	Typical Cold DCR† (Ω)	Typical I <sup>2</sup> T‡ (A <sup>2</sup> S)	Agency Approval
							
SMFS1206P150	K	1.5	32V DC	50A / 32V DC	0.140	0.4137	✓
SMFS1206P200	N	2.0			0.092	0.4383	✓
SMFS1206P250	O	2.5			0.065	0.7343	✓
SMFS1206P300	P	3.0			0.036	1.5267	✓
SMFS1206P350	R	3.5			0.030	1.5312	✓
SMFS1206P400	S	4.0	32V DC	35A / 32V DC	0.023	2.5356	✓
SMFS1206P500	T	5.0			0.016	3.3999	✓
SMFS1206P600	6	6.0			0.0125	5.7505	✓
SMFS1206P700	U	7.0			0.007	8.8200	✓

† Measured at ≤10% rated current and 25°C

‡ Melting I<sup>2</sup>T at 10 times of rated current

## SMFS1206 Series Surface Mount Fuses Devices

### Electrical Specification

Ampere Rating	% of Current Rating	Opening Time
1.5A~7A	100%	4 Hours Min.
	200%	60 Seconds Max.
	1000%	1.0mSec. Min


### Physical Specifications

<b>Materials</b>	Substrate: Ceramic Terminations: Silver over-plated with 100% tin Element: Silver or Silver/palladium
<b>Solderability</b>	MIL-STD-202
<b>Soldering Parameters</b>	Wave Solder: 260°C, 10 seconds max. Reflow Solder: 260°C, 5 seconds max. Hand Solder: 350°C, 5 seconds max.

### Environmental Specifications


<b>Operating Temperature</b>	-55°C to 125 °C
------------------------------	-----------------

### Thermal Derating Curve

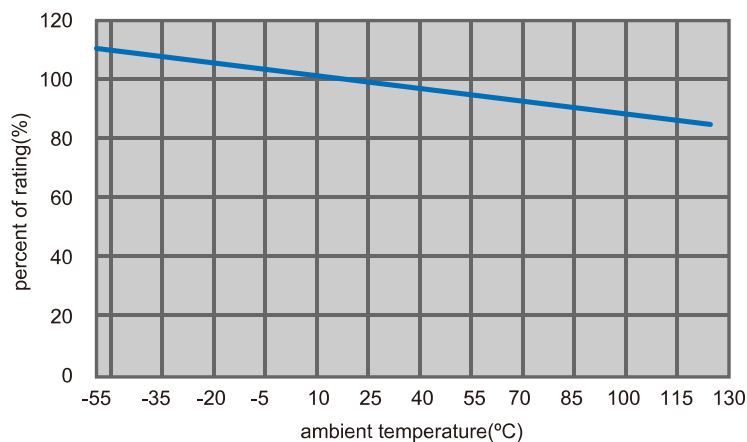


## SMFS1206 Series Surface Mount Fuses Devices

Time-Current Curve

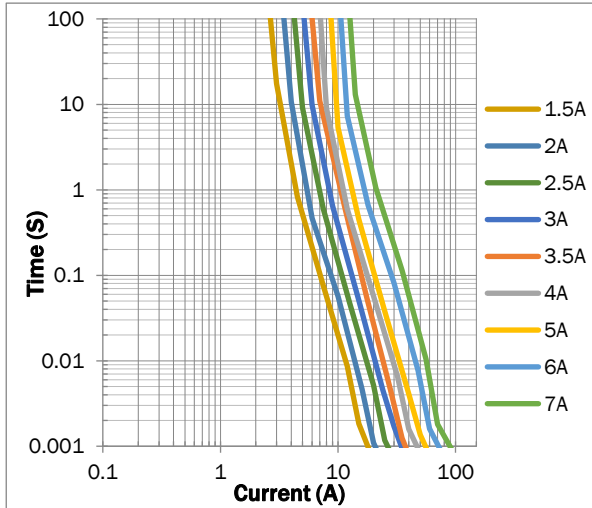

I<sup>2</sup>T vs Time Curve

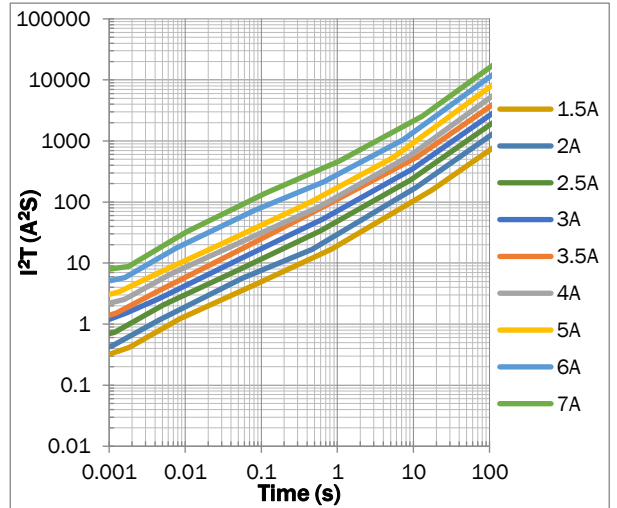


### Physical Dimensions (mm.)

Dimensions (mm)

L	W	T	D
3.10±0.20	1.55±0.20	0.55±0.20	0.50±0.20

Recommended Solder Pad Dimension (mm)

A	B	C	D
4.4±0.5	2.4±0.3	1.2±0.3	2.0±0.3

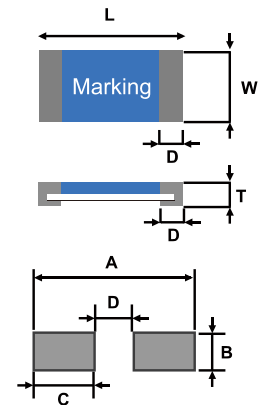


Dimensions of Standard Test Board (mm)

Ampere Rating	Board Thickness	Copper Layer Thickness	Copper Trace Width
1A~6A	1.6	0.035	5.0
7A	1.6	0.070	7.5

### Part Number

SMF S 1206 P □□□

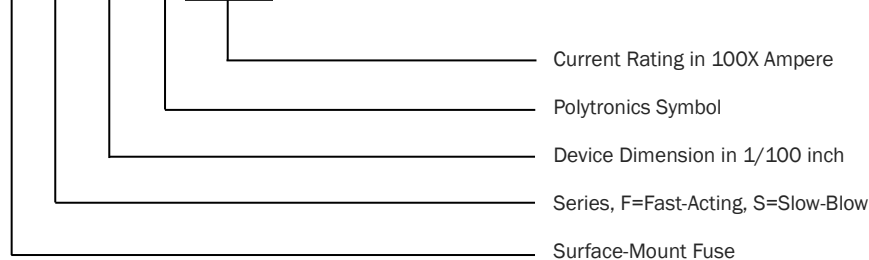


## SMFS1206 Series Surface Mount Fuses Devices

### Reliability Test

Characteristics	Test condition / Methods	Requirement	Test Reference
Voltage Drop	100% In	Deviation between the mean value: <15%	IEC 60127-4
Time/Current	100% In	No fusing, 4 hours min.	UL248-14
	200% In	≤ 60sec	Refer to Spec.
	1000% In (1.5A~7A)	> 1.0 ms	IEC60127-4
Endurance Test	100% In, 1hour on, 15min off, 100cycles; followed by 1hour at 125% In	ΔR  <10%	IEC60127-4
Temperature Rise	100% In	ΔT  <75 °C	IEC60127-4
Interrupting Ability	50A/32V DC (1.5A~3.5A) 35A/32V DC (4A~7A)	Without permanent arcing, ignition, and bursting of fuse link	UL 248-14 IEC60127-4
Solderability	240°C ± 5°C, 3sec ± 0.5sec	95% coverage min	IEC 60127-4 MIL-STD-202 Method 208
Resistance to Soldering	260°C ± 5°C, 10sec ± 0.5sec	ΔR  : <10% Legible appearance	MIL-STD-202 Method 210
Bending Test	Distance between holding points: 90mm Bending: 1 mm; Time: 10 sec	ΔR  : <10% No mechanical damages	IEC 60127-4
High Temperature Operating Life	70°C ± 2°C at 60% In for 96 hours	ΔR  : <10%; no fusing	MIL-STD-202 Method 108
Low Temperature Storage	-55°C ± 3°C for 96 hours	ΔR  : <10%	IEC60068-2-1
High temperature Storage	125°C ± 2°C for 96 hours	ΔR  : <10%	IEC60068-2-2
Humidity (Steady State)	40°C ± 2°C, 90~95%RH for 1000 hours	ΔR  : <10%	MIL-STD-202 Method 103
Salt Spray	5% salt solution, 48 hours exposure	ΔR  : <10% Legible appearance	MIL-STD-202 Method 101
Thermal Shock	100 cycles between -65°C / +125°C 60 minutes at each extreme zone	ΔR  : <10% No mechanical damage	MIL-STD-202 Method 107

## SMFS1206 Series Surface Mount Fuses Devices

### Soldering Parameters

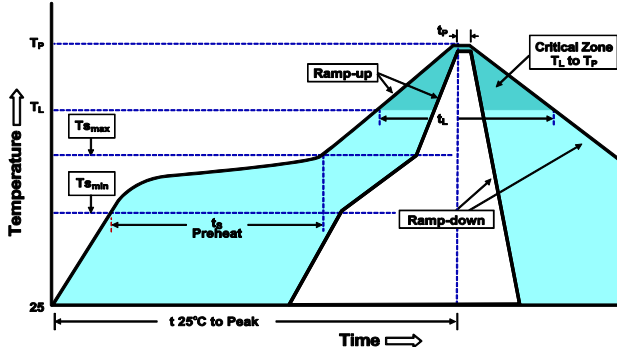


Average Ramp-Up Rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/second max.
Preheat	
-Temperature Min (T <sub>smin</sub> )	150°C
-Temperature Max (T <sub>smax</sub> )	200°C
-Time (T <sub>smin</sub> to T <sub>smax</sub> )	60-120 seconds
Time maintained above:	
-Temperature (T <sub>l</sub> )	217°C
-Time (t <sub>l</sub> )	20-30 seconds
Peak Temperature (T <sub>p</sub> )	260°C
Time within 5°C of actual Peak Temperature (t <sub>p</sub> )	5 seconds
Ramp-Down Rate	6°C /second max.
Time 25°C to Peak Temperature	8 minutes max.

Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

### Tape & Reel Specification (mm.)

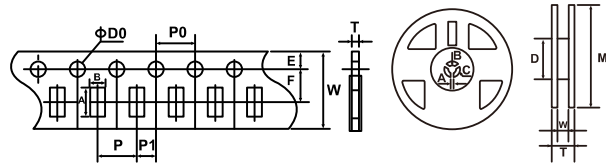

A	3.50 ± 0.20
B	1.90 ± 0.20
W	8.00 ± 0.20
F	3.50 ± 0.05
E	1.75 ± 0.10
P	4.00 ± 0.10
P0	4.00 ± 0.10
P1	2.00 ± 0.10
D0	∅ 1.50 ± 0.10
T	0.75 ± 0.10

M	∅ 178.0 ± 2.0
W	9.5 ± 1.0
T	12.5 ± 1.5
A	2.0 ± 0.5
B	∅ 13.0 ± 0.5
C	∅ 21.0 ± 0.5
D	∅ 58.0 ± 2.0

### Packaging Quantity

Part Number	Tape & Reel Quantity
SMFS1206PXXX	5000

### Storage

- The ambient temperature recommended for storage shall be between 5°C ~30°C.
- The relative humidity recommended for storage shall be between 25%RH~60%RH.
- The products shall not be stored in areas where harmful gases containing sulfur or chlorine are present.

### Warning

- Fuse product is not recommended for any type of coating. Polytronics is not responsible for any damage directly or indirectly related to the coating.
- For copper layer thickness or copper trace width different from the standard test board, fusing characteristics needs to be verified to ensure product performance meet user requirement.

单击下面可查看定价，库存，交付和生命周期等信息

[>>聚鼎](#)