

# <SPECIFICATION>

SPEC.No. ASDIQ-SPE-132(00)

Date: Aug.09,2022

To :

CUSTOMER'S PRODUCT NAME

ASDI PRODUCT NAME:

MBPF2012KF-SERIES

## RECEIPT CONFIRMATION

UNCONDITIONAL CONSENT

CONDITIONAL CONSENT

APPROVED	CHECKED

## ASDI SIGNATURE

APPROVED	CHECKED	PREPARED
Xianglong Li	Liang Wang	Jiayin Cai



Xiamen ASDI Electronics Co.,Ltd.



# CAUTION WHEN HANDLING

Before use the products, please read this specification.

# CAUTION FOR SAFETY USING

When use the products, be careful to mentioned below for safety using.

## CAUTION

\*The product should be used within 12 monthes.

Focus on the storage conditions.

Solderability may become weak if it exceeds the period.

\*Do not use and store the product in condition of gas corrosion (Salt,Acid,Alkaline).

\*The products must be preheated before soldering.

The operating temperature including self-generated heat must be within '-40~+125℃

\*Rework by soldering iron;Please keep the mentioned conditions in this specification.

\*In case of insert P.C. Board on chassis, do not add mechanical stress to the product.

\*Be careful to arrange of non-magnetic field type inductors.

The error may be caused by magnetic field coupling.

\*In case handle the products, please use wrist strap for ground static discharge on human body.

The product keeps away from magnet or magnetized things.

\*Do not use the product beyond the mentioned conditions in this specification.

\*About an application

The products listed on this specification sheet are intended for use in general electronic equipment

(AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

\*The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

- |                                |   |
|--------------------------------|---|
| 1)Aerospace/Aviation equipment | 6)Transportation control equipment      |
| 2)Military equipment           | 7)Power-generation control equipment    |
| 3)Seabed equipment             | which directly endanger human life      |
| 4)Safety equipment             | 8)Atomic energy-related equipment       |
| 5)Medical equipment            | 9)Other applications that are not       |
|                                | considered general-purpose applications |

If you intend to use the products in the following applications, please contact our sales office.

Transportation equipment (cars, electric trains, ships, etc.), Public information-processing equipment, Electric heating apparatus / burning equipment, Disaster prevention/crime prevention equipment

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

Xiamen ASDI Electronics Co.,Ltd.

DWG.No.  
ASDIQ-SPE-132(00)

ISSUE

CUSTOMER

ASDI PART No.  
MBPF2012KF-SERIES

CUSTOMER'S DWG NO.

## 1.INDEX

Listed item	Attachment&Tables	Page
1.Features	Please see (1)	3/7
2.Dimensions	Please see (2)	3/7
3.Part Numbering	Please see (3)	3/7
4.Electrical Specifications	Please see (4)	3/7
5.Reliability Tests	Please see (5)	4/7
6.Soldering and Mounting	Please see (6)	6/7
7.Packaging Information	Please see (7)	7/7
8.Note	Please see (8)	7/7

## 2.Manufacturing Location

China

DWG.No.

ASDIQ-SPE-132(00)

PAGE  
2/7


Xiamen ASDI Electronics Co.,Ltd.

(1)Features

- 1.Monolithic inorganic material construction.
- 2.Low DC resistance structure of electrode to prevent wasteful electric power consumption.
- 3.Closed magnetic circuit avoids crosstalk.
- 4.Suitable for flow and reflow soldering.
- 5.Shapes and dimensions follow E.I.A. spec.
- 6.Available in various sizes.
- 7.Excellent solderability and heat resistance.
- 8.High reliability.
- 9.This component is compliant with RoHS legislation and also support lead-free soldering

(2)Dimensions

Chip Size	A	B	C	D
	2.00±0.20	1.25±0.20	0.85±0.20	0.50±0.30



(3)Part Numbering

**MBPF**      **2012**      **KF**      **-**      **121**      **T**      **30**

A                      B                      C                      D                      E                      F

A: Series  
 B: Dimension      L x W  
 C: Material      Lead Free Material  
 D: Impedance      121=120Ω  
 E:Packaging      T=Taping and Reel, B=Bulk(Bags)  
 F:Rated Current      30=3000mA

(4)Electrical Specifications

Table 1






ASDI Part Number	Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)
MBPF2012KF-100T20	10±25%	60mV/100M	0.10	2000
MBPF2012KF-100T30	10±25%	60mV/100M	0.01	3000
MBPF2012KF-100T40	10±25%	60mV/100M	0.03	4000
MBPF2012KF-100T60	10±25%	60mV/100M	0.01	6000
MBPF2012KF-110T30	11±25%	60mV/100M	0.01	3000
MBPF2012KF-220T60	22±25%	60mV/100M	0.01	6000
MBPF2012KF-260T30	26±25%	60mV/100M	0.04	3000
MBPF2012KF-300T30	30±25%	60mV/100M	0.04	3000
MBPF2012KF-300T50	30±25%	60mV/100M	0.03	5000
MBPF2012KF-300T60	30±25%	60mV/100M	0.01	6000
MBPF2012KF-330T30	33±25%	60mV/100M	0.04	3000
MBPF2012KF-330T60	33±25%	60mV/100M	0.01	6000
MBPF2012KF-390T30	39±25%	60mV/100M	0.04	3000
MBPF2012KF-400T30	40±25%	60mV/100M	0.04	3000
MBPF2012KF-420T40	42±25%	60mV/100M	0.03	4000
MBPF2012KF-470T30	47±25%	60mV/100M	0.04	3000
MBPF2012KF-500T30	50±25%	60mV/100M	0.03	3000
MBPF2012KF-600T30	60±25%	60mV/100M	0.04	3000
MBPF2012KF-600T50	60±25%	60mV/100M	0.02	5000
MBPF2012KF-680T30	68±25%	60mV/100M	0.04	3000
MBPF2012KF-700T30	70±25%	60mV/100M	0.04	3000
MBPF2012KF-750T30	75±25%	60mV/100M	0.04	3000
MBPF2012KF-800T30	80±25%	60mV/100M	0.04	3000
MBPF2012KF-800T60	80±25%	60mV/100M	0.04	6000
MBPF2012KF-101T30	100±25%	60mV/100M	0.04	3000
MBPF2012KF-101T40	100±25%	60mV/100M	0.03	4000
MBPF2012KF-121T20	120±25%	60mV/100M	0.10	2000
MBPF2012KF-121T30	120±25%	60mV/100M	0.04	3000
MBPF2012KF-121T40	120±25%	60mV/100M	0.03	4000
MBPF2012KF-121T60	120±25%	60mV/100M	0.10	6000
MBPF2012KF-151T30	150±25%	60mV/100M	0.04	3000
MBPF2012KF-181T20	180±25%	60mV/100M	0.10	2000
MBPF2012KF-201T30	200±25%	60mV/100M	0.04	3000
MBPF2012KF-221T20	220±25%	60mV/100M	0.10	2000
MBPF2012KF-221T30	220±25%	60mV/100M	0.40	3000
MBPF2012KF-241T20	240±25%	60mV/100M	0.10	2000
MBPF2012KF-301T20	300±25%	60mV/100M	0.10	2000
MBPF2012KF-301T40	300±25%	60mV/100M	0.03	4000
MBPF2012KF-331T20	330±25%	60mV/100M	0.10	2000
MBPF2012KF-331T30	330±25%	60mV/100M	0.04	3000
MBPF2012KF-401T20	400±25%	60mV/100M	0.10	2000
MBPF2012KF-471T10	470±25%	60mV/100M	0.20	1000
MBPF2012KF-601T10	600±25%	60mV/100M	0.20	1000
MBPF2012KF-601T20	600±25%	60mV/100M	0.20	2000
MBPF2012KF-801T10	800±25%	60mV/100M	0.20	1000
MBPF2012KF-102T15	1000±25%	60mV/100M	0.20	1500

DWG.No.

ASDIQ-SPE-132(00)

PAGE  
3/7

(5) Reliability Tests

No.	Test item	Performance		Test details																											
0	Series	MBPF	MBSF																												
1	Operating temperature	- 55~+125°C																													
2	Storage temperature	- 55~+125°C																													
3	Impedance (Z)	Refer to standard electrical characteristics list		HP4291A, HP4287A+16092A																											
4	Inductance (Ls)																														
5	Q Factor																														
6	DC Resistance																														
7	Rated Current																														
8	Temperature Rise Test	30°C max. (ΔT)		1. Applied the allowed DC current. 2. Temperature measured by digital surface thermometer.																											
9	Solder heat Resistance	Appearance: No significant abnormality. Impedance change: Within ± 30%.	No mechanical damage. Remaining terminal electrode: 70% min.	Preheat: 150°C, 60sec. Solder: Sn-Ag3.0-Cu0.5 Solder temperature: 260±5°C Flux for lead free: rosin Dip time: 10±0.5sec. 																											
10	Solderability	More than 90% of the terminal electrode should be covered with solder.		Preheat: 150°C, 60sec. Solder: Sn-Ag3.0-Cu0.5 Solder temperature: 230±5°C Flux for lead free: rosin Dip time: 4±1sec.																											
11	Terminal strength	The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions. 		For MBPF MBSF <table border="1"> <thead> <tr> <th>Size</th> <th>Force (Kgf)</th> <th>Time(sec)</th> </tr> </thead> <tbody> <tr> <td>1005</td> <td>0.2</td> <td></td> </tr> <tr> <td>1608</td> <td>0.5</td> <td></td> </tr> <tr> <td>2012</td> <td>0.6</td> <td></td> </tr> <tr> <td>3216</td> <td>1.0</td> <td>&gt;25</td> </tr> <tr> <td>3225</td> <td>1.0</td> <td></td> </tr> <tr> <td>4516</td> <td>1.0</td> <td></td> </tr> <tr> <td>4532</td> <td>1.5</td> <td></td> </tr> <tr> <td>5750</td> <td>2.0</td> <td></td> </tr> </tbody> </table>	Size	Force (Kgf)	Time(sec)	1005	0.2		1608	0.5		2012	0.6		3216	1.0	>25	3225	1.0		4516	1.0		4532	1.5		5750	2.0	
Size	Force (Kgf)	Time(sec)																													
1005	0.2																														
1608	0.5																														
2012	0.6																														
3216	1.0	>25																													
3225	1.0																														
4516	1.0																														
4532	1.5																														
5750	2.0																														
12	Flexure strength	The terminal electrode and the dielectric must not be damaged by the forces applied on the right conditions. 		Solder a chip on a test substrate, bend the substrate by 2mm (0.079in) and return.																											
13	Bending Strength	The ferrite should not be damaged by Forces applied on the right condition. 		<table border="1"> <thead> <tr> <th>Size</th> <th>mm(inches)</th> <th>P-Kgf</th> </tr> </thead> <tbody> <tr> <td>1608</td> <td>0.80(0.033)</td> <td>0.3</td> </tr> <tr> <td>2012</td> <td>1.40(0.055)</td> <td>1.0</td> </tr> <tr> <td>3216</td> <td>2.00(0.079)</td> <td>2.5</td> </tr> <tr> <td>3225</td> <td>2.00(0.079)</td> <td>2.5</td> </tr> <tr> <td>4516</td> <td>2.70(0.106)</td> <td>2.5</td> </tr> <tr> <td>4532</td> <td>2.70(0.106)</td> <td>2.5</td> </tr> <tr> <td>5750</td> <td>2.70(0.106)</td> <td>2.5</td> </tr> </tbody> </table>	Size	mm(inches)	P-Kgf	1608	0.80(0.033)	0.3	2012	1.40(0.055)	1.0	3216	2.00(0.079)	2.5	3225	2.00(0.079)	2.5	4516	2.70(0.106)	2.5	4532	2.70(0.106)	2.5	5750	2.70(0.106)	2.5			
Size	mm(inches)	P-Kgf																													
1608	0.80(0.033)	0.3																													
2012	1.40(0.055)	1.0																													
3216	2.00(0.079)	2.5																													
3225	2.00(0.079)	2.5																													
4516	2.70(0.106)	2.5																													
4532	2.70(0.106)	2.5																													
5750	2.70(0.106)	2.5																													
14	Random Vibration Test	Appearance: Cracking, shipping and any other defects harmful to the characteristics should not be allowed. Impedance: within±30%		Frequency: 10-55-10Hz for 1 min. Amplitude: 1.52mm Directions and times: X, Y, Z directions for 2 hours. A period of 2 hours in each of 3 mutually perpendicular directions (Total 6 hours).																											

DWG.No.


ASDIQ-SPE-132(00)

PAGE  
4/7


No.	Test item	Performance	Test details									
15	Drop	Drop 10 times on a concrete floor from a height of 75cm	a: No mechanical damage b: Impedance change: $\pm 30\%$									
16	Loading at High Temperature	Appearance: no damage. Inductance: within $\pm 10\%$ of initial value.	Humidity: 90~95%RH. Temperature: $40 \pm 2^\circ\text{C}$ . Duration: $500 \pm 12$ hrs. Measured at room temperature after placing for 2 to 3hrs.									
17	Humidity		Humidity: 90~95%RH. Temperature: $40 \pm 2^\circ\text{C}$ . Duration: $500 \pm 12$ hrs. Measured at room temperature after placing for 2 to 3hrs.									
18	Thermal shock	Appearance: no damage. Impedance: within $\pm 30\%$ of initial value.  For Bead : <table border="1"> <thead> <tr> <th>Phase</th> <th>Temperature(<math>^\circ\text{C}</math>)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>-55 \pm 2^\circ\text{C}</math></td> <td><math>30 \pm 3</math></td> </tr> <tr> <td>2</td> <td><math>+125 \pm 5^\circ\text{C}</math></td> <td><math>30 \pm 3</math></td> </tr> </tbody> </table> Measured: 5 times	Phase	Temperature( $^\circ\text{C}$ )	Time(min.)	1	$-55 \pm 2^\circ\text{C}$	$30 \pm 3$	2	$+125 \pm 5^\circ\text{C}$	$30 \pm 3$	For MBPF MBSF : Condition for 1 cycle Step1: $-55 \pm 2^\circ\text{C}$ $30 \pm 3$ min. Step2: $+125 \pm 5^\circ\text{C}$ $30 \pm 3$ min. Number of cycles: 5
Phase	Temperature( $^\circ\text{C}$ )		Time(min.)									
1	$-55 \pm 2^\circ\text{C}$	$30 \pm 3$										
2	$+125 \pm 5^\circ\text{C}$	$30 \pm 3$										
19	Low temperature storage test		Temperature: $-55 \pm 2^\circ\text{C}$ . Duration: $500 \pm 12$ hrs. Measured at room temperature after placing for 2 to 3hrs.									
20	Drop	Drop 10 times on a concrete floor from a height of 75cm	a: No mechanical damage b: Impedance change: $\pm 30\%$									

**\*\*Derating Curve**

For the ferrite chip bead which withstanding current over 1.5A, as the operating temperature over  $85^\circ\text{C}$ , the derating current information is necessary to consider with. For the detail derating of current, please refer to the Derated Current vs. Operating Temperature curve.

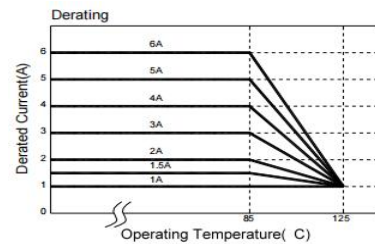

(6) Soldering and Mounting  
 6-1, Recommended PC Board Pattern



PC board should be designed so that products are not sufficient under mechanical stress as warping the board. Products shall be positioned in the sideways direction against the mechanical stress to prevent failure.

6-2, Soldering

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

6-2,1 Lead Free Solder re-flow:

Recommended temperature profiles for lead free re-flow soldering in Figure 1.

6-2,2 Solder Wave:

Wave soldering is perhaps the most rigorous of surface mount soldering processes due to the steep rise in temperature seen by the circuit when immersed in the molten solder wave, typical at 230°C. Due to the risk of thermal damage to products, wave soldering of large size products is discouraged. Recommended temperature profile for wave soldering is shown in Figure 2.

6-2,3 Soldering Iron(Figure 3):

Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

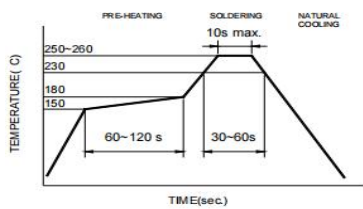


Figure 1. Re-flow Soldering(Lead Free)

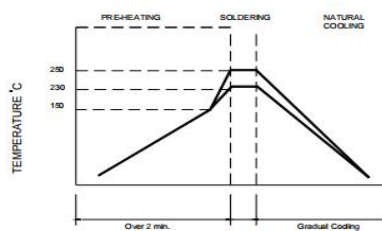


Figure 2. Wave Soldering


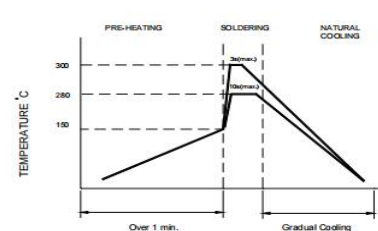


Figure 3. Hand Soldering

6-2,4 Solder Volume:

Accordingly increasing the solder volume, the mechanical stress to product is also increased. Exceeding solder volume may cause the failure of mechanical or electrical performance. Solder shall be used not to be exceed as shown in right side:



DWG.No.	ASDIQ-SPE-132(00)	PAGE 6/7
---------	-------------------	-------------





单击下面可查看定价，库存，交付和生命周期等信息

[>>ASDI](#)