

MIDI® 70V HP Fuse



MIDI® High Performance Fuse Rated 70V

The MIDI® 70V High Performance (HP) Fuse is designed for high current circuit protection up to 200A with "Diffusion Pill Technology." The MIDI® 70V HP features 1MΩ Open State Resistance after fuse opening to guarantee safe interruption at any voltage up to 70V. The MIDI® 70V HP Fuse is an ideal solution for any high current application like fans, heaters and high inrush peak loads. The new added 135% overload gate provides much better wire protection.

Specifications

Interrupting Rating:	2500A @ 70 VDC
Voltage Rating:	70 VDC
Operating Temperature Range:	-40°C to +125°C
Housing Material:	PA66 GF25 FR
Terminals:	ETP Copper (Tin plated)
Mounting Torque:	9Nm+/-1Nm
Open State Resistance (after fuse opening)	>1MΩ
Reference to:	ISO 20934 - Type SF36



Dimensions

Part Number	"A" mm	"B" mm	"C" mm
4998030.M_	0.412	8.02	4.03
4998040.M_	0.412	8.02	4.03
4998050.M_	0.412	8.02	4.03
4998060.M_	0.412	8.02	4.03
4998070.M_	0.412	8.02	4.03
4998080.M_	0.635	8.24	4.25
4998100.M_	0.635	8.24	4.25
4998125.M_	0.635	8.24	4.25
4998150.M_	0.635	8.24	4.25
4998175.M_	0.635	8.24	4.25
4998200.M_	0.635	8.24	4.25

Ordering Information


Part Number	Package Size	Bolt Hole Qty
4998xxx.M-M6	500	2
4998xxx.M-1M6	500	1
4998xxx.M-NH	500	0

Time-Current Characteristics


Rating (A)	% of Rating	Opening Time Min (s)	Opening Time Max (s)
30-200	100	360000	--
	135	300	3600
	150	90	500
	200	1	50
	300	0.3	4
	500	0.1	1
600	0.07	0.7	

Dimensions

Dimensions in mm

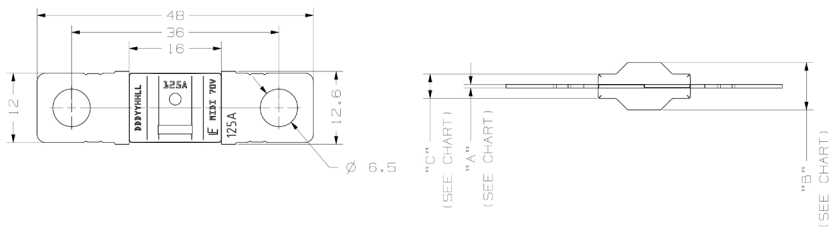

Time-Current Characteristic Curves

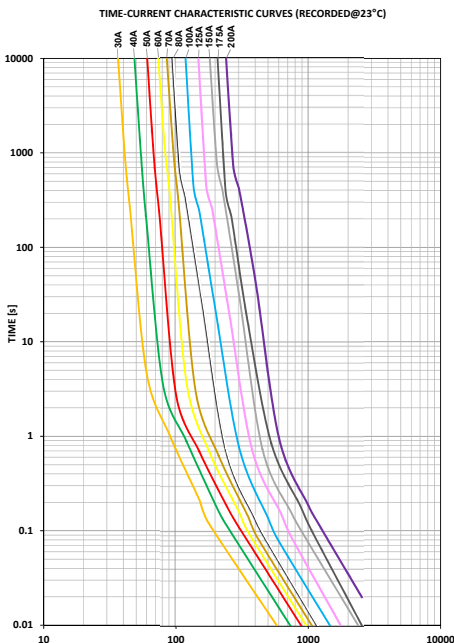

Ratings

Part Number	Current Rating (A)	Color Code	Rated Voltage (V)	Voltage Drop (mV) max.	Wire (mm²)	I ² t (A²s)
4998030.M_	30	Orange	70	120	2.5	2148
4998040.M_	40	Green	70		4	3567
4998050.M_	50	Red	70		6	5623
4998060.M_	60	Yellow	70		6	7098
4998070.M_	70	Orange/White	70	110	10	8317
4998080.M_	80	White	70		10	10403
4998100.M_	100	Blue	70	100	10	17513
4998125.M_	125	Pink	70		16	24920
4998150.M_	150	Grey	70		25	50193
4998175.M_	175	Black	70		25	57749
4998200.M_	200	Purple	70		35	119075

Littelfuse products are not designed for, and shall not be used for, any purpose (including, without limitation, automotive, military, aerospace, medical, life-saving, life-sustaining or nuclear facility applications, devices intended for surgical implant into the body, or any other application in which the failure or lack of desired operation of the product may result in personal injury, death, or property damage) other than those expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse documentation. The sale and use of Littelfuse products is subject to Littelfuse Terms and Conditions of Sale, unless otherwise agreed by Littelfuse.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Littelfuse\(美国力特\)](#)