

Messrs. _____

ALUMINUM ELECTROLYTIC CAPACITORS SPECIFICATION SHEET

RoHS Compliance

CUSTOMER PART No.		
Rubycon PART No.	450 BXC 3R3 M EFC 10X12.5	
DRAWING No.	RER-203095	ISSUE No.1
ISSUE DATE	14 September 2016	



RUBYCON CORPORATION
ENGINEERING DIVISION

1938-1, NISHIMINOWA, INA-SHI, NAGANO-KEN, JAPAN
TEL No. 0265-72-7116
FAX No. 0265-73-3380

DESIGN	SHOJI WATANABE
	<i>S. Watanabe</i>
CHECK	TOSHIHIRO KOIKE
	<i>T. Koike</i>
APPROVAL	TAKESHI KOBAYASHI
	<i>T. Kobayashi</i>


1.Scope

This specification covers polarized aluminum electrolytic capacitors with non-solid electrolyte for use in electronic equipments.
Style: CE 04 (Radial Leaded)

2.Numbering System

Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Size
<u>450</u>	<u>BXC</u>	<u>3R3</u>	<u>M</u>	<u>EFC</u>	<u>□□</u>	<u>10X12.5</u>

3.Diagram of dimensions Unit : mm

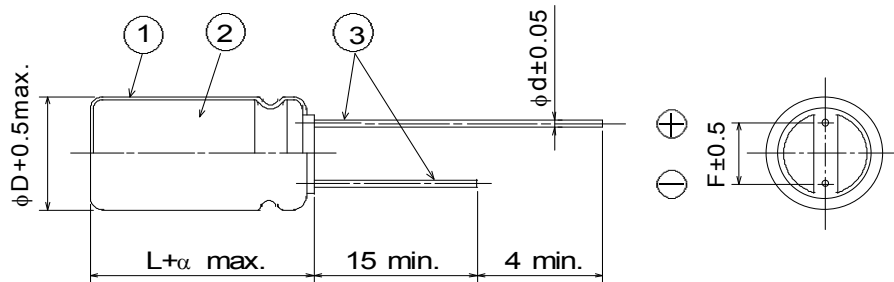

Dimensions				
φD	L	F	φd	α
10	12.5	5	0.6	2


①	Sleeve	P.E.T.	
②	Case	Aluminum	
③	Lead Wire	Copper clad steel wire	Tin plated

A safety vent shall be provided.

4.Marking

Unless otherwise specified, capacitor shall be clearly marked the following items on its body.

Sleeve color: Black, Lettering color: White

(1)Trade mark	Rubycon
(2)Rated Voltage	450V
(3)Nominal Capacitance	3.3μF
(4)Polarity	 (Negative Polarity)
(5)Series	BXC
(6)Lot Number	
(7)Maximum Operating Temperature	105°C
(8)PET sleeve mark	PET

5.Electrical Performance

Table-1

Operating Temperature Range	-25 ~105	(°C)
Nominal Capacitance	20°C, 120Hz	3.3 (μF)
Capacitance Tolerance	-20 ~ 20	(%)
Rated Voltage	450	(V.DC)
Surge Voltage	500	(V.DC)
Leakage Current	20°C, 1min.	159 (μA max.)
	20°C, 5min.	54.7 (μA max.)
Dissipation Factor (tanδ)	20°C, 120Hz	0.20 (max.)
Rated Ripple Current	105°C, 100kHz	130 (mAr.m.s.)
Impedance Ratio	120Hz Z-25°C/Z20°C	6 (max.)

6. PERFORMANCE

Table-2

1	Load Life Test	<p><Condition> Capacitor under the test shall be applied the rated voltage continuously through 1000Ω series protective resistor (with maximum ripple current) at following temperature and time. After the test and returned in standard condition for 1 to 2 hours, and the capacitor shall meet following requirements.</p> <p style="text-align: center;">Temperature: 105 ±2°C Time: 8000 $\begin{matrix} +72 \\ 0 \end{matrix}$ h</p> <p><Criteria></p> <table border="1" data-bbox="560 600 1465 745"> <tbody> <tr> <td>Leakage Current</td> <td>Not more than the specified value</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value</td> </tr> <tr> <td>Appearance</td> <td>Notable changes shall not be found. (except sleeve Condition)</td> </tr> </tbody> </table>	Leakage Current	Not more than the specified value	Capacitance Change	Within ±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value	Appearance	Notable changes shall not be found. (except sleeve Condition)															
Leakage Current	Not more than the specified value																								
Capacitance Change	Within ±20% of the initial value																								
Dissipation Factor	Not more than 200% of the specified value																								
Appearance	Notable changes shall not be found. (except sleeve Condition)																								
2	Shelf Life Test	<p><Condition> Capacitor shall be stored at following temperature and time with no voltage applied . After the test and returned in standard condition for 1 to 2 hours and the capacitor shall meet following requirements. (If any doubt arises on the judgment, the capacitors shall be subjected to voltage treatment specified in JIS C 5141,5.2.)</p> <p style="text-align: center;">Temperature: 105 ±2°C Time: 1000 $\begin{matrix} +48 \\ 0 \end{matrix}$ h</p> <p><Criteria></p> <table border="1" data-bbox="560 1077 1465 1223"> <tbody> <tr> <td>Leakage Current</td> <td>Not more than the specified value</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of the initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value</td> </tr> <tr> <td>Appearance</td> <td>Notable changes shall not be found</td> </tr> </tbody> </table>	Leakage Current	Not more than the specified value	Capacitance Change	Within ±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value	Appearance	Notable changes shall not be found															
Leakage Current	Not more than the specified value																								
Capacitance Change	Within ±20% of the initial value																								
Dissipation Factor	Not more than 200% of the specified value																								
Appearance	Notable changes shall not be found																								
3	Maximum Permissible Ripple Current	<p>(1) The maximum permissible ripple current is the maximum A.C. current at 100kHz and can be applied at maximum operating temperature.</p> <p>(2) The combined value of D.C. voltage and the peak A.C. voltage shall not exceed the rated voltage and shall not be reverse voltage.</p> <p><Frequency Coefficient></p> <table border="1" data-bbox="459 1451 1126 1626"> <thead> <tr> <th>Frequency (Hz)</th> <th>120</th> <th>1k</th> <th>10k</th> <th>100k≤</th> </tr> </thead> <tbody> <tr> <th>Capacitance (μF)</th> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>3.3</td> <td>0.2</td> <td>0.4</td> <td>0.8</td> <td>1</td> </tr> </tbody> </table> <p><Temperature Coefficient ></p> <table border="1" data-bbox="459 1693 1015 1771"> <tbody> <tr> <td>Temperature(°C)</td> <td>105</td> <td>85</td> <td>65≥</td> </tr> <tr> <td>Coefficient</td> <td>1.0</td> <td>1.7</td> <td>2.1</td> </tr> </tbody> </table> <p>◇Temperature coefficient shows a limit of ripple current exceeding the rated ripple current that can be passed through a capacitor at each temperature when the life expectancy of a capacitor becomes to be nearly equal with the lifetime at the rated maximum operating temperature.</p> <p>◇Use of aluminum electrolytic capacitor under ripple voltage with wide amplitude is equivalent to quick charge-discharge operation. When ripple voltage with the amplitude over 70Vp-p is expected for the products with rated voltage over 100V, please contact us.</p>	Frequency (Hz)	120	1k	10k	100k≤	Capacitance (μF)					3.3	0.2	0.4	0.8	1	Temperature(°C)	105	85	65≥	Coefficient	1.0	1.7	2.1
Frequency (Hz)	120	1k	10k	100k≤																					
Capacitance (μF)																									
3.3	0.2	0.4	0.8	1																					
Temperature(°C)	105	85	65≥																						
Coefficient	1.0	1.7	2.1																						

Notes on use of aluminum electrolytic capacitors

(1) Charge and discharge

Do not use for the circuit that repeats quick charge or discharge.

(2) External stress

Do not apply excessive force of pushing, pulling bending, and/or twisting to the main body, lead wire and terminals.

(3) Heat resistance at soldering process

In the soldering process of PC board with Capacitors mounted, secondary shrinkage or crack of sleeve may be observed when soldering temperature is too high and /or soldering time is too long.

If lead wire of other components or pattern of double sided PC board touches the capacitor, the similar failure may be also originated at pre-heating, heating at hardening process of adhesive and soldering process.

(4) Insulation and PC board mounting

Sleeve is for marking purpose only.

It is not recognized as insulation materials.

When double sided PC board is employed, note that it could cause a short circuit if lead wire of other components or pattern of double sided PC board touches capacitor. Please avoid circuit pattern runs underneath capacitor.

In addition, case and cathode terminal are not insulated.

(5) Adhesives and coating materials

Do not use the adhesives and coating materials that contain halogenated organic solvents or chloroprene as polymer.

(6) Storage

Keep at a normal temperature and humidity. During a long storage time, leakage current will be increased. To prevent heat rise or any trouble that high leakage current possibly causes, voltage treatment is recommended for the capacitors that have been stored for a long time.

(Storage Condition)

*Aluminum electrolytic capacitors should not be stored in high temperatures or where there is a high level of humidity. The suitable storage condition is 5°C-35°C and less than 75% in relative humidity.

*Aluminum electrolytic capacitors should not be stored in damp conditions such as water, saltwater spray or oil spray.

*Do not store aluminum electrolytic capacitors in an environment full of hazardous gas (hydrogen sulfide, sulfurous acid gas, nitrous acid, chlorine gas, ammonia or bromine gas).

*Aluminum electrolytic capacitors should not be stored under exposure to ozone, ultraviolet rays or radiation.

(7) Fumigation and halogenated flame retardant

It may cause corrosion of internal electrodes, aluminum cases and terminal surface when the following conditions exist.

*Fumigation of wooden pallets before shipment to disinfect vermin.

*Existence of components or parts that contain halogenated flame retardant agent (bromine etc.) together with capacitors.

*When halogenated detergents of antiseptics for preventing infection of epidemic diseases contact directly to capacitors.

(8) PC board cleaning after soldering

Please consult us when cleaning is subjected.

*Guide to application except the above are described in our catalog and EIAJ RCR-2367C.

EIAJ RCR-2367C: "Safety Application Guide for fixed aluminum electrolytic capacitors for use in electronic equipment."

Published by Japan Electronics and Information Technology Industries Association.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Rubycon\(红宝石\)](#)