


6 5 4 3 2 1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © Copyright 2022 TE Connectivity Ltd. ALL RIGHTS RESERVED.

REVISIONS					
REV.	ECR#	ZONE	DESCRIPTION	CHANGED BY/DATE	APPROVED BY/DATE
AA			INITIAL RELEASE	S.J. 9/9/2008	S.J. 9/9/2008
AB	3881		CHANGED VSWR VALUE FROM 1.20:1 TO 1.3:1	MCL 1/22/2009	T.P. 1/22/2009
AC	MAN-4213	TABLE	CORRECTED BEAMWIDTH FROM: 54° TO: 70°	MCL 1/17/2011	T.P. 1/17/2011
AD	MAN-4305	TABLE	CORRECTED AXIAL RATIO WAS 2 dB	MCL 4/21/2011	S.J. 4/21/2011

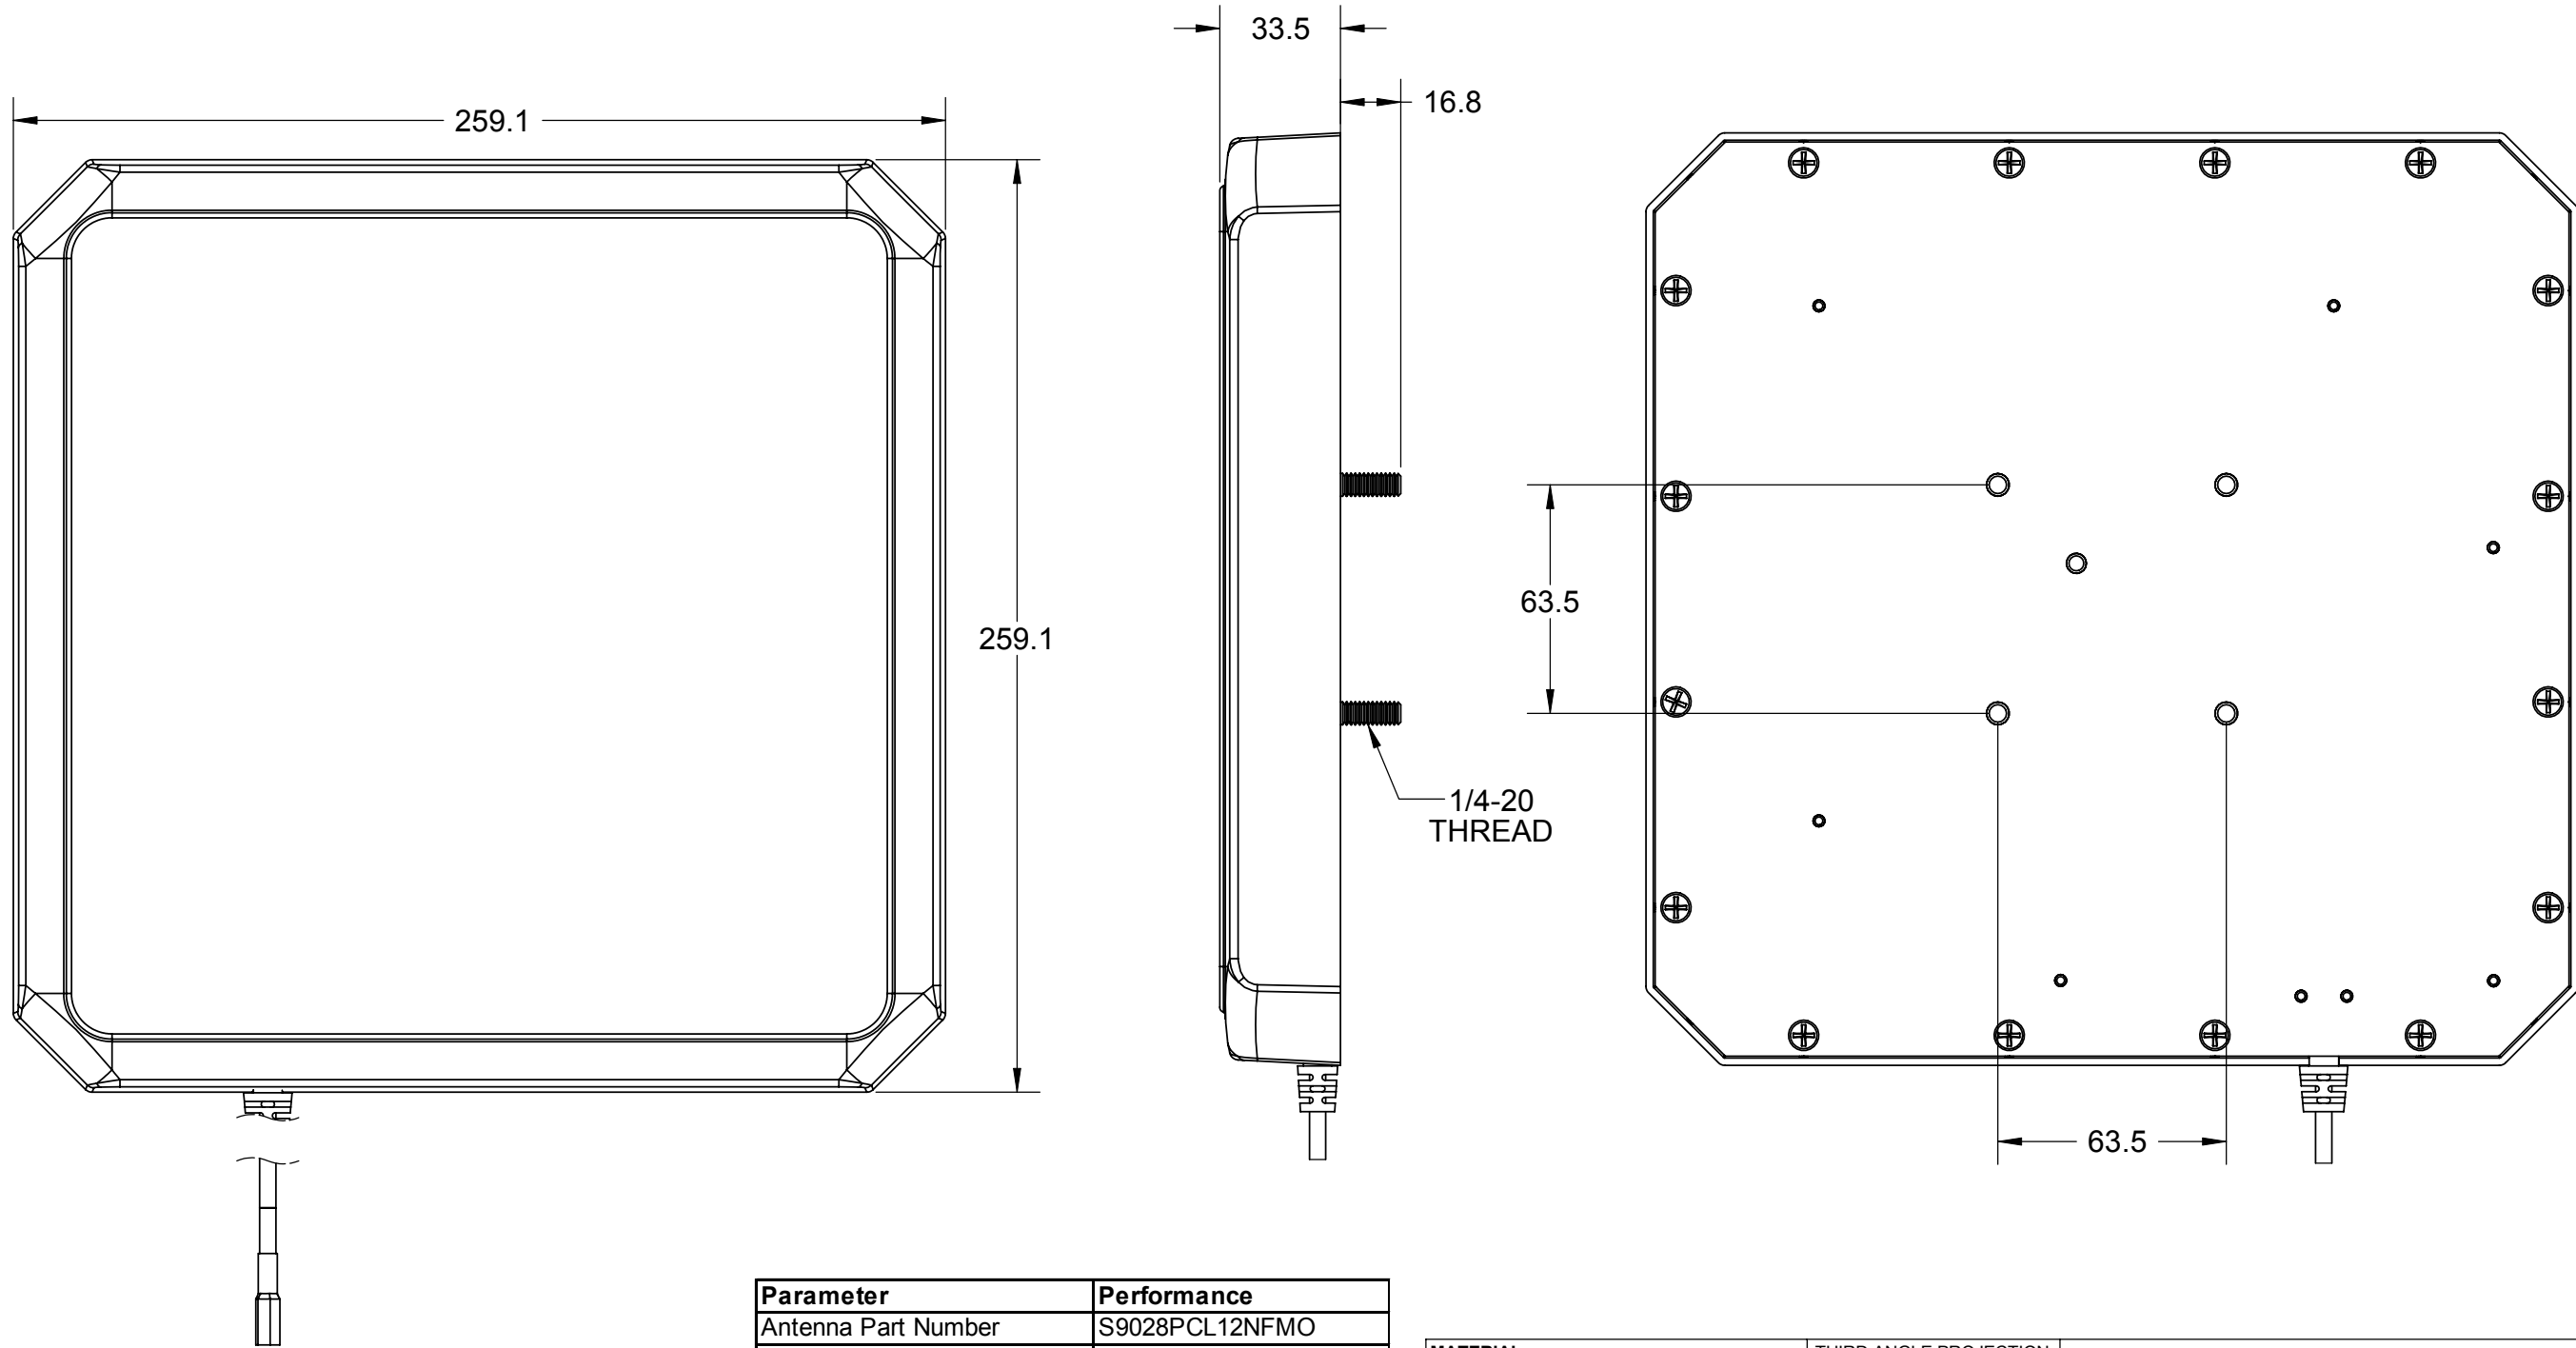

Parameter	Performance
Antenna Part Number	S9028PCL12NFMO
Frequency	902-928 MHz
Gain	9dBic
Polarization	Left Hand Circular
VSWR	1.3:1
Beamwidth (3dB)	70 Degrees x 70 Degrees
Front to Back Ratio	20 dB
Axial Ratio	1 dB Typical
Pigtail	RG-58, 12"
RF Connector	N(f)
Power	10 Watts
Weight	2.3 lbs

MATERIAL: N/A		THIRD ANGLE PROJECTION			
FINISH: N/A		DO NOT SCALE DRAWING			
APPROVALS		DATE		TITLE: <h1>S9028PCL12NF</h1>	
DRAWN BY	S. JOHNSON	09/09/08			
PROJ. ENG.	T. PETROPOULOS	09/09/08			
APPL. MECH.	K. SEARL	09/09/08			
MFG.	I. CHICKLIS	09/09/08		SIZE: A3	
INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ASME Y14.5M-1994 TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS				DWG. NO. S9028PCL12NFMO	
ANGLE: ±30' 0 PLACE DECIMAL: ±0.5 1 PLACE DECIMAL: ±0.25 2 PLACE DECIMAL: ±0.13 SURFACE ROUGHNESS 1.6/√				SCALE: 1:2 PREVIOUS#	
				REV AD	
				SHEET 1 OF 1	

6 5 4 3 2 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)