



SAW Components

SAW GPS + GLONASS filter

Series/Type: B8(\$%

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39162B8401P810	B39162B8(3/8)13P810	2014-02-28	2014-12-31	2015-02-27

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Data sheet


Application


- ESD robust low-loss RF GPS + GLONASS filter with ESD protection at the Input
- Usable passbands: up to 8.0 MHz for GPS and 8.34 MHz for GLONASS
- Very low insertion attenuation
- Unbalanced to unbalanced operation
- No matching network required for operation at 50 Ω


Features

- Package size 1.4 x 1.1 x 0.72 mm³
- RoHS compatible
- Approximate weight 0.003 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

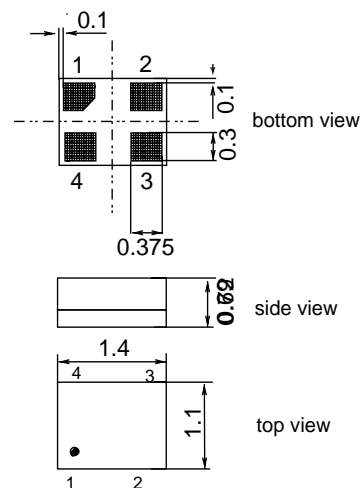
Pin configuration

- 1 Input
- 3 Output
- 2,4 Case ground

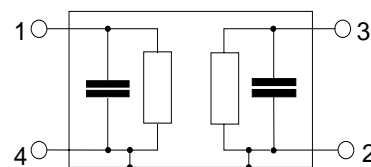
 Please read *cautions and warnings and important notes* at the end of this document.

SAW Components
B8401
SAW GPS + GLONASS filter
1588.655 MHz

Data sheet


Characteristics of Filter

Temperature range for specification: T = -30 °C to +85 °C
 Terminating source impedance: Z_S = 50 Ω
 Terminating load impedance: Z_L = 50 Ω

		B8401			
		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	1588.65		MHz
Maximum insertion attenuation	α_{max}				
1573.42 ... 1577.42 MHz		—	0.9	1.4	dB
1571.42 ... 1605.89 MHz		—	1.0	1.7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
1573.42 ... 1577.42 MHz		—	0.2	0.7	dB
1571.42 ... 1605.89 MHz		—	0.3	1.0	dB
VSWR Input					
1573.42 ... 1577.42 MHz		—	1.4	1.8	
1597.55 ... 1605.89 MHz		—	1.3	1.8	
VSWR Output					
1573.42 ... 1577.42 MHz		—	1.4	1.8	
1597.55 ... 1605.89 MHz		—	1.2	1.8	
Group delay ripple¹⁾ (p-p)	$\Delta\tau$				
1573.42 ... 1577.42 MHz		—	2	8	ns
1597.55 ... 1605.89 MHz		—	3	8	ns
Deviation within GLONASS band relative to L1 1575.42 MHz		—	-3	—	ns
Attenuation	α				
0.1 ... 698.0 MHz		40	51	—	dB
698.0 ... 716.0 MHz		40	51	—	dB
716.0 ... 776.0 MHz		45	50	—	dB
776.0 ... 787.0 MHz		46	50	—	dB
787.0 ... 824.0 MHz		46	50	—	dB
824.0 ... 849.0 MHz		45	49	—	dB
849.0 ... 880.0 MHz		45	49	—	dB
880.0 ... 915.0 MHz		45	49	—	dB
915.0 ... 1427.0 MHz		44	48	—	dB
1427.0 ... 1452.0 MHz		42	47	—	dB
1452.0 ... 1525.0 MHz		30	38	—	dB
1625.0 ... 1660.0 MHz		1.0	2.7	—	dB
1660.0 ... 1710.0 MHz		30	44	—	dB

Please read *cautions and warnings and important notes* at the end of this document.

SAW Components
B8401
SAW GPS + GLONASS filter
1588.655 MHz

Data sheet



				B8401			
				min.	typ. @ 25 °C	max.	
1710.0	...	1785.0	MHz	45	50	—	dB
1785.0	...	1850.0	MHz	45	57	—	dB
1850.0	...	1920.0	MHz	45	56	—	dB
1920.0	...	1980.0	MHz	45	55	—	dB
1980.0	...	2010.0	MHz	40	54	—	dB
2010.0	...	2025.0	MHz	40	53	—	dB
2025.0	...	2305.0	MHz	40	48	—	dB
2305.0	...	2360.0	MHz	40	48	—	dB
2360.0	...	2402.0	MHz	40	47	—	dB
2402.0	...	2480.0	MHz	40	46	—	dB
2480.0	...	2496.0	MHz	40	46	—	dB
2496.0	...	2570.0	MHz	40	45	—	dB
2570.0	...	2690.0	MHz	30	44	—	dB
2690.0	...	3168.0	MHz	30	42	—	dB
3168.0	...	4224.0	MHz	15	31	—	dB
4224.0	...	4752.0	MHz	10	15	—	dB
4752.0	...	4900.0	MHz	10	18	—	dB
4900.0	...	5825.0	MHz	5	9	—	dB
5825.0	...	6336.0	MHz	—	11	—	dB
6336.0	...	8976.0	MHz	—	12	—	dB
H2 (2nd Harmonics)							
1 tone (cw) method:							
P _{in} @15dBm @F1= 777MHz..805MHz							
P _{out} @F2=2*F1							
				—	-104	—	dBm
IIP2 (2nd order Input Intercept Point)²⁾							
2 tone (cw) method:							
P1@14dBm @F1=824MHz..915MHz							
P2 @10dBm @F2=F1+1575.42MHz							
				—	126	—	dBm
IIP3 (3rd order Input Intercept Point)							
2 tone (cw) method:							
P1@14dBm @F1=1710MHz..1980MHz							
P2 @10dBm @F2=2*F1+1575.42MHz ³⁾							
				—	75	—	dBm
P1@10dBm @F1=1850MHz..1910MHz							
P2 @14dBm @F2=1712.71MHz..1742.71MHz ⁴⁾							
				—	71	—	dBm
P1@10dBm @F1=2444.58MHz..2474.58MHz							
P2 @14dBm @F2=2010MHz..2025MHz ⁴⁾							
				—	69	—	dBm

1) measured with an aperture of 2 MHz

2) IIP2=P1+P2-Poutimd2-IL

3) IIP3=P1+(P2-Poutimd3-IL)/2

4) IIP3=P2+(P1-Poutimd3-IL)/2

 Please read *cautions and warnings and important notes* at the end of this document.

SAW Components
B8401
SAW GPS + GLONASS filter
1588.655 MHz

Data sheet


Maximum ratings of Filter

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5	V	
ESD voltage @ Input				
Contact Discharge	V _{ESD}	± 8 ¹⁾	kV	at input pin 1
Air Discharge	V _{ESD}	± 15 ²⁾	kV	at input pin 1
Machine Model	V _{ESD}	± 1000 ³⁾	V	at input pin 1
Machine Model	V _{ESD}	± 100 ³⁾	V	at output pin 3
Charge Device Model	V _{ESD}	± 750 ⁴⁾	V	at input and output (pin 1 and 3)
Human Body Model	V _{ESD}	± 1000 ⁵⁾	V	at input pin 1
Human Body Model	V _{ESD}	± 400 ⁵⁾	V	at output pin 3

¹⁾ acc. to IEC61000-4-2 (Contact discharge, R_s = 330 R, C_s = 150 pF)

²⁾ acc. to IEC61000-4-2 (Air discharge, R_s = 330 R, C_s = 150 pF)

³⁾ acc. to JESD22-A115A (machine model, R_s = 0 R, C_s = 200 pF)


⁴⁾ acc. to JESD22-C101 (charge device model)

⁵⁾ acc. to JESD22-A114 (Human body model, R_s = 1500 R, C_s = 100 pF)


Data sheet



Transfer function (passband)

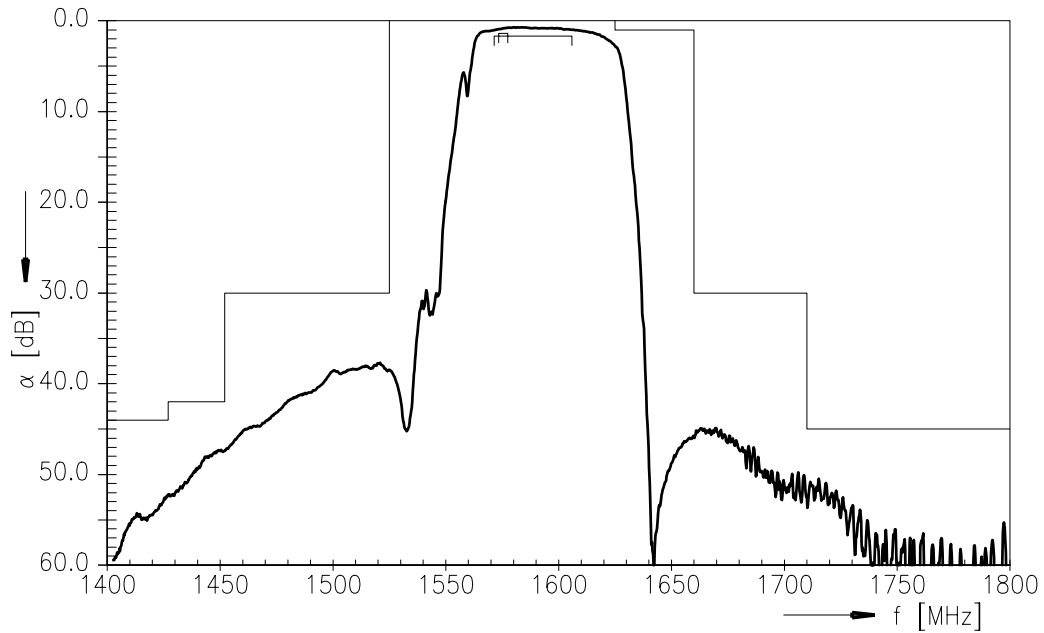

Transfer function

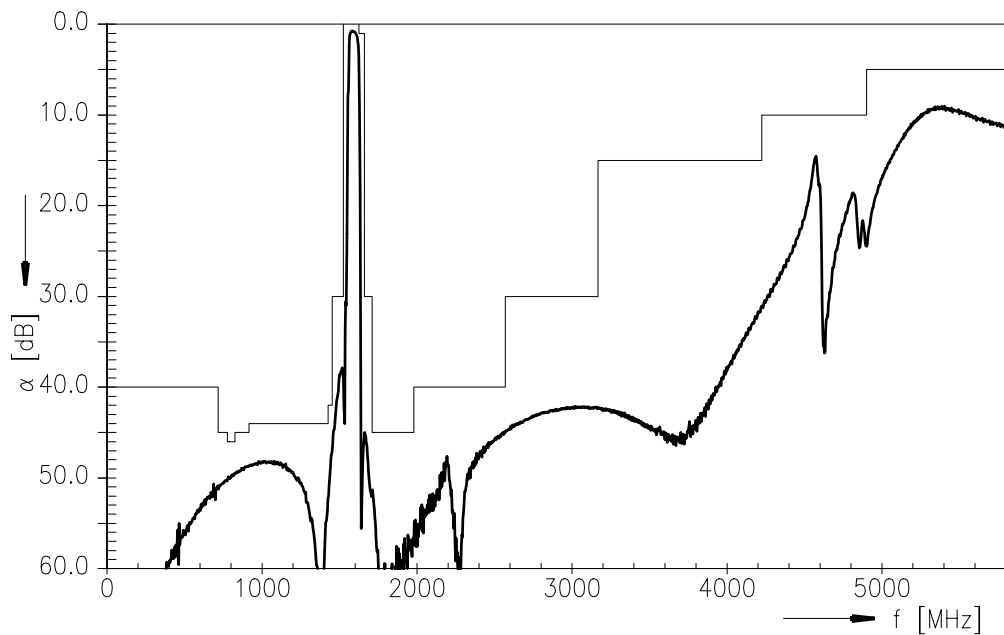



Please read *cautions and warnings* and *important notes* at the end of this document.

Data sheet





Smith chart / VSWR

S_{11} function

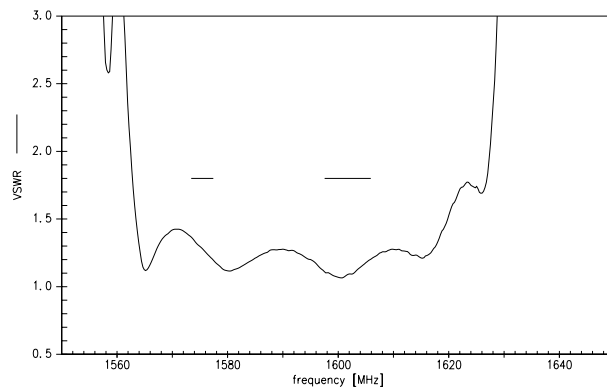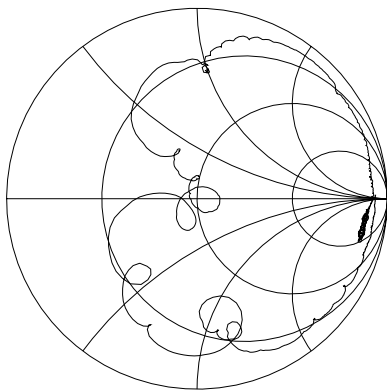

S_{22} function

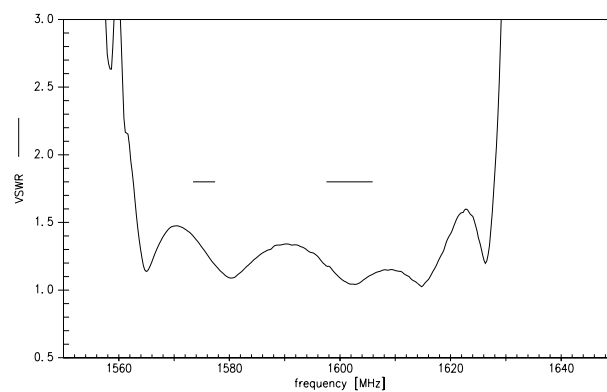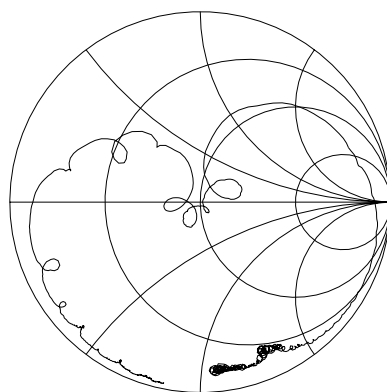

Please read *cautions and warnings* and *important notes* at the end of this document.

SAW Components	B8401
SAW GPS + GLONASS filter	1588.655 MHz

Data sheet



Type	B8401
Ordering code	B39162B8401P810
Marking and package	C61157-A8-A31
Packaging	F61074-V8249-Z000
Date codes	L_1126
S-parameters	B8401_NB.s2p, B8401_WB.s2p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)