



SAW Components

SAW Duplexer

LTE Band 2 / CDMA BC1


Series/type:	B8522
Ordering code:	B39202B8522P810
Date:	January 07, 2015
Version:	2.1

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.


EPCOS AG is a TDK Group Company.

Application


- Low-loss SAW duplexer for mobile telephone
LTE Band 2 and CDMA BC1 systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 60 MHz


Features

- Package size 1.8 x 1.4 mm²,
max. height 0.475 mm
- RoHS compatible
- Approx. weight 0.0035g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- Fully matched by integrated matching network except for RX port matching
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

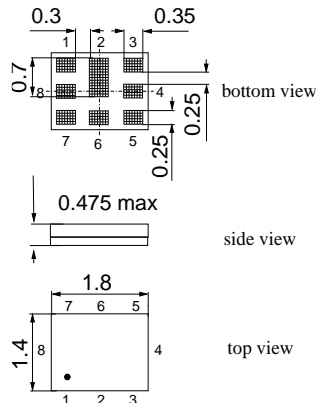
Pin configuration

- 3 TX input
- 1 RX output
- 6 Antenna
- 2, 4, 5, 7, 8 To be grounded



SAW Components	B8522
SAW Duplexer	1880.0 / 1960.0 MHz

Data sheet



Characteristics

Temperature range for specification: T = -20 °C to +90 °C
 TX terminating impedance: Z_{TX} = 50 Ω
 ANT terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω + 2.2nH

		B8522			
		min.	typ. @ 25°C	max.	
Characteristics TX - ANT¹⁾					
Center frequency	f _C	—	1880	—	MHz
Maximum insertion attenuation	α _{max}				
1850.24 ... 1909.76 MHz	α _{LTE}	—	2.0	2.9	dB
1851.25 ... 1908.75 MHz	α _{CDMA}	—	1.9	2.7 ²⁾	dB
@f _{Carrier} 1852.40 ... 1907.60 MHz	α _{WCDMA} ³⁾	—	1.8	2.4 ⁴⁾	dB
Error Vector Magnitude	EVM ⁵⁾				
@f _{Carrier} 1852.40 ... 1907.60 MHz		—	0.9	3.0	%
@f _{Carrier} 1852.40 ... 1907.60 MHz		—	0.9	2.5 ⁶⁾	%
Input VSWR (TX port)					
1850.24 ... 1909.76 MHz		—	1.5	2.0	
Output VSWR (ANT port)					
1850.24 ... 1909.76 MHz		—	1.5	2.0	
Attenuation	α				
10.0 ... 894.0 MHz		37	40	—	dB
1565.4 ... 1605.9 MHz		45	50	—	dB
1605.9 ... 1680.0 MHz		30	49	—	dB
1930.24 ... 1989.76 MHz		44	51	—	dB
2010.0 ... 2025.0 MHz		20	45	—	dB
2110.0 ... 2155.0 MHz		44	48	—	dB
2400.0 ... 2500.0 MHz		25	32	—	dB
3690.0 ... 3830.0 MHz		21	26	—	dB
5150.0 ... 5850.0 MHz		18	23	—	dB

1) Specified min./max. values are valid for a testing power of +10 dBm.
 2) Valid for extended temperature range from -30 °C to +90 °C
 3) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (6).
 4) Valid for reduced temperature range from -20 °C to +85 °C
 5) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.
 6) Valid for room temperature 25 °C

SAW Components	B8522
SAW Duplexer	1880.0 / 1960.0 MHz

Data sheet



Characteristics

Temperature range for specification: T = -20 °C to +90 °C
 TX terminating impedance: Z_{TX} = 50 Ω
 ANT terminating impedance: Z_{ANT} = 50 Ω
 RX terminating impedance: Z_{RX} = 50 Ω + 2.2nH

		B8522			
Characteristics ANT - RX¹⁾		min.	typ. @ 25 °C	max.	
Center frequency	f _C	—	1960	—	MHz
Maximum insertion attenuation	α _{max}				
1930.24 ... 1989.76MHz	α _{LTE}	—	2.3	3.4	dB
1931.25 ... 1988.75MHz	α _{CDMA}	—	2.2	3.2 ²⁾	dB
@f _{Carrier} 1932.40 ... 1987.60MHz	α _{WCDMA} ³⁾	—	2.1	2.9 ⁴⁾	dB
Input VSWR (ANT port)					
1930.24 ... 1989.76 MHz		—	1.5	2.0	
Output VSWR (RX port)					
1930.24 ... 1989.76 MHz		—	1.4	2.0	
Attenuation	α				
1.0 ... 700.0MHz		40	43	—	dB
80.0MHz		50	58	—	dB
700.0 ... 1850.0MHz		34	37	—	dB
1850.24 ... 1909.76 MHz		45	53	—	dB
2050.0 ... 2075.0MHz		25	38	—	dB
2075.0 ... 2400.0MHz		27	32	—	dB
2400.0 ... 2550.0MHz		25	29	—	dB
2550.0 ... 3000.0MHz		33	38	—	dB
3000.0 ... 6000.0MHz		40	46	—	dB

1) Specified min./max. values are valid for a testing power of +10 dBm.
 2) Valid for extended temperature range from -30 °C to +90 °C
 3) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (6).
 4) Valid for reduced temperature range from -20 °C to +85 °C

SAW Components	B8522
SAW Duplexer	1880.0 / 1960.0 MHz

Data sheet



Characteristics

Temperature range for specification: $T = -20\text{ °C to }+90\text{ °C}$
 TX terminating impedance: $Z_{TX} = 50\ \Omega$
 ANT terminating impedance: $Z_{ANT} = 50\ \Omega$
 RX terminating impedance: $Z_{RX} = 50\ \Omega + 2.2\text{ nH}$

Characteristics TX - RX ¹⁾	B8522			
	min.	typ. @ 25 °C	max.	
Isolation				
1574.00 ... 1577.00 MHz	40	60	—	dB
1850.24 ... 1909.76 MHz	53	56	—	dB
1930.24 ... 1989.76 MHz	50	54	—	dB
3700.00 ... 3820.00 MHz	20	58	—	dB
5550.00 ... 5850.00 MHz	20	53	—	dB

¹⁾ Specified min./max. values are valid for a testing power of +10 dBm.

Linearity	B8522			
	min.	typ. @ 25 °C	max.	
Triple beat test ¹⁾	—	70	—	dB
IMD product levels²⁾				
IMD2, Blocker 1 80.0 MHz	—	105	—	dBm
IMD2, Blocker 2 3780.0 ... 3900.0 MHz	—	115	—	dBm
IMD3, Blocker 3 1770.0 ... 1830.0 MHz	—	107	—	dBm
IMD3, Blocker 4 5630.0 ... 5810.0 MHz	—	120	—	dBm

¹⁾ Blocker1 - Tx + Blocker2 @ CW input powers at Ant.-port, Setup1/2/3: Tx: 1855/1880/1911 MHz @ +21.5 dBm, Blocker1: 1856/1881/1911 MHz @ +21.5 dBm, Blocker2: 1935/1960/1990 MHz @ -27 dBm, TB Product: 1934&1936/1959&1961/1989&1991 MHz

²⁾ @ $f_{TX}=[1850 \dots 1910\text{ MHz}]$, $f_{RX}=[1930 \dots 1990\text{ MHz}]$, $f_{RX} - f_{TX}=80\text{ MHz}$, IMD product levels for power levels $P_{TX}=21\text{ dBm}$ (antenna port output power) and $P_{Blocker}=-15\text{ dBm}$ (antenna port input power)

Maximum ratings

Operable temperature range	T	-30/+90	°C	
Storage temperature range	T _{stg}	-40/+90	°C	
DC voltage	V _{DC}	0	V	
ESD voltage	V _{ESD}	300 ¹⁾	V	human body model, 1 pulse charged device model, 3 pulses source and load impedance 50 Ω
		600 ²⁾	V	
Input power at 1850.24 ... 1909.76 MHz elsewhere	P _{IN}	28	dBm	} continuous wave T = 50°C, >5.000 h
		10	dBm	

¹⁾ acc. to JESD22-A114F (human body model), 1 negative & 1 positive pulse.

²⁾ acc. to JESD22-C101C (charged device model), 3 negative & 3 positive pulses.

Annotation for characteristics section

Attenuation of WCDMA signal ("Powertransferfunction", α_{WCDMA}) is determined by

$$\int_{-\infty}^{\infty} |S_{\text{ds21}}(f) H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$


f_{Carrier} according to 3GPP TS 25.101 (e.g. for WCDMA Band 2 Passband, f_{Carrier} ranges from 1852.4 MHz (lowest Tx channel) to 1907.6 MHz (highest Tx channel)). $H_{\text{RRC}}(f)$ is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:

$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$


Data sheet



Frequency response TX - ANT (passband, LTE specification)

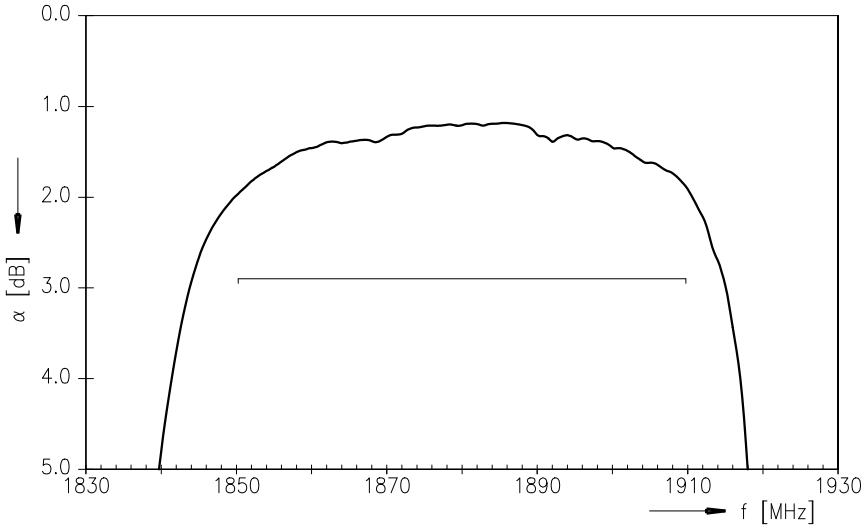


Frequency response TX - ANT

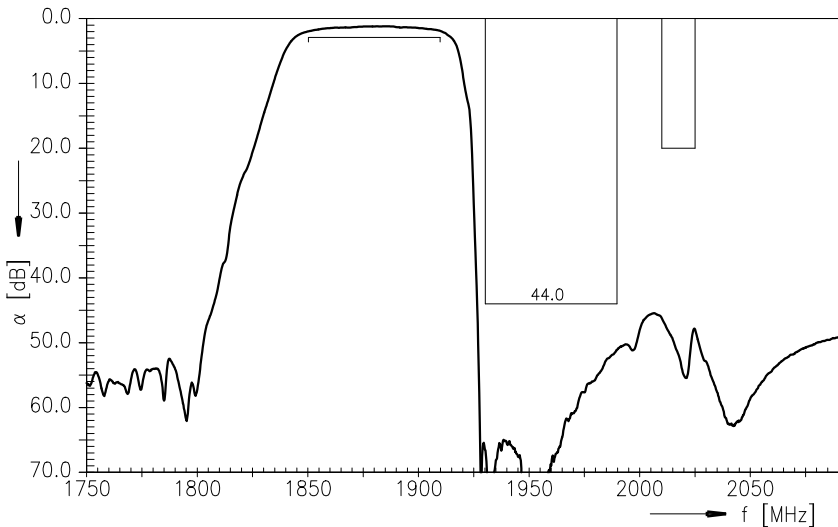


Data sheet



Frequency response TX - ANT (wideband)

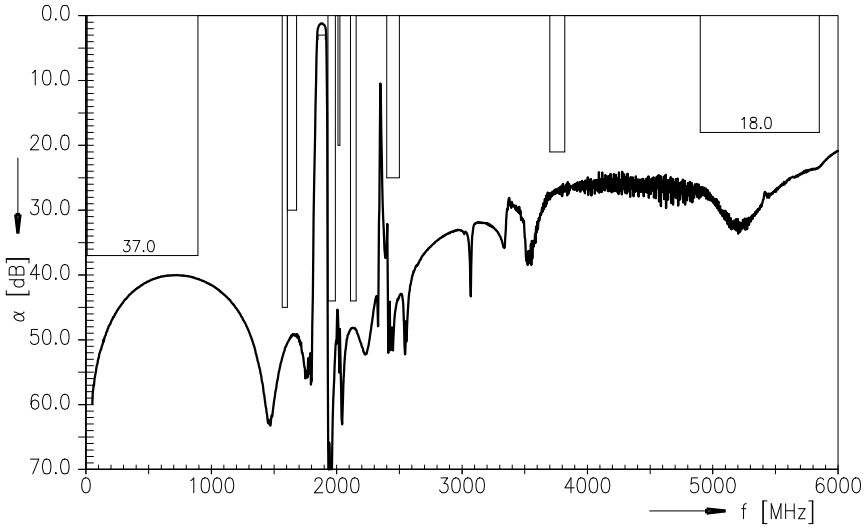


Frequency response ANT - RX (passband, LTE specification)

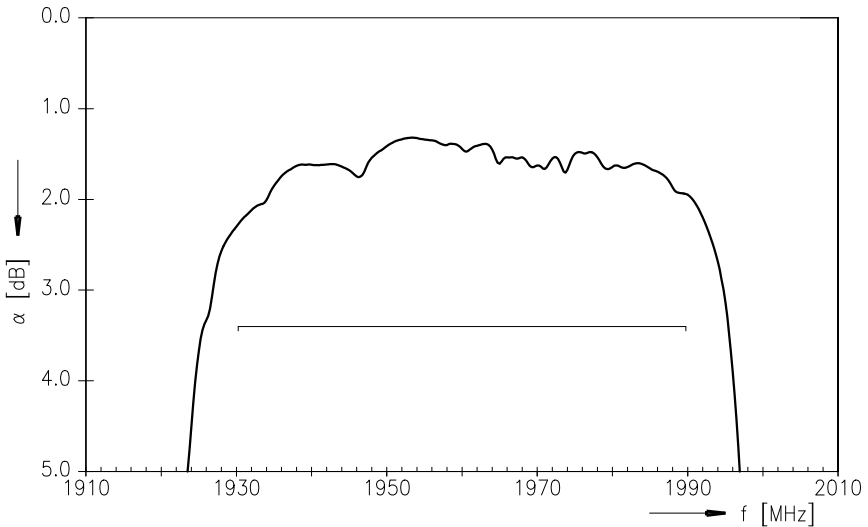


Data sheet



Frequency response ANT - RX

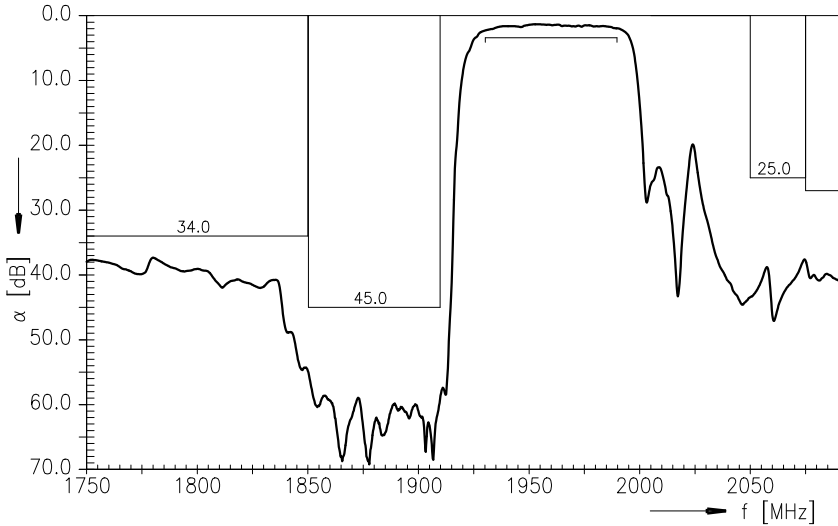


Frequency response ANT - RX (wideband)

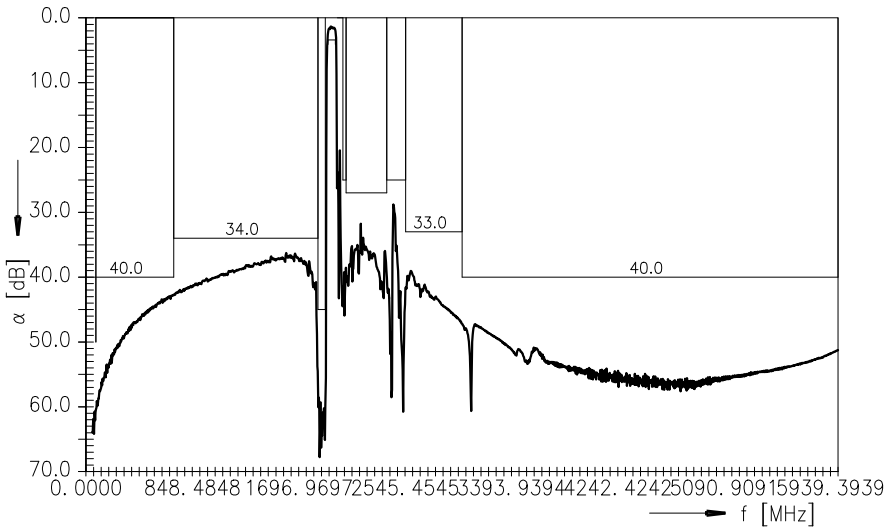

Data sheet



Frequency response TX - RX isolation


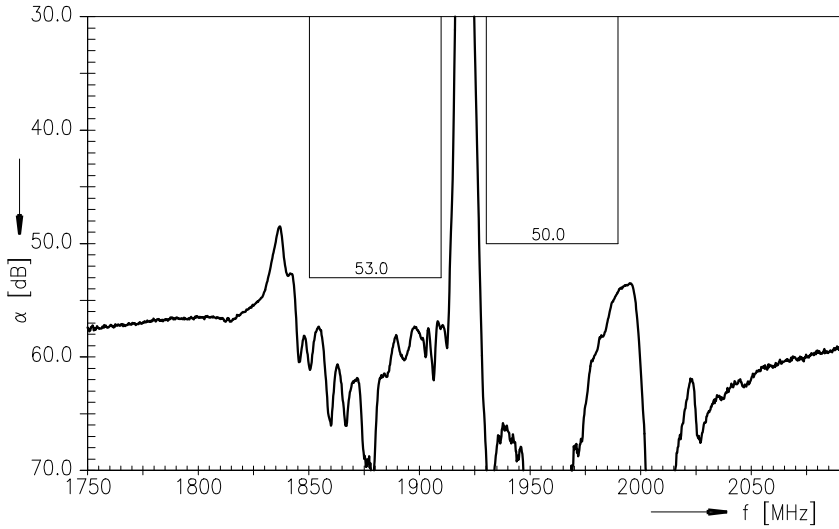


SAW Components **B8522**
SAW Duplexer **1880.0 / 1960.0 MHz**



Data sheet





VSWR S₁₁ TX-port

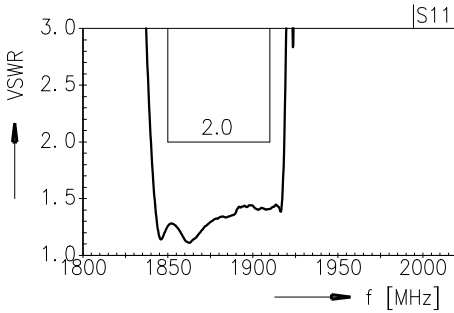

VSWR S₃₃ RX-port

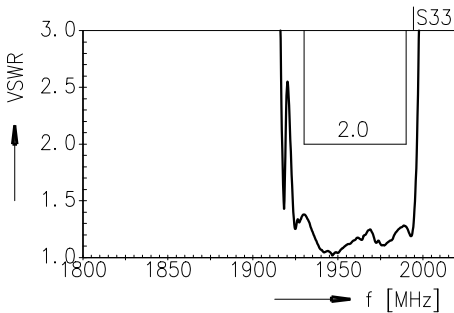

VSWR S₂₂ ANT-port

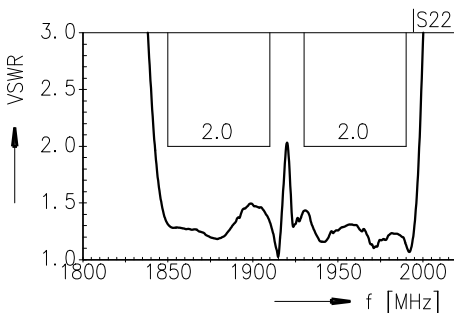

SAW Components	B8522
SAW Duplexer	1880.0 / 1960.0 MHz

Data sheet



References

Type	B8522
Ordering Code	B39202-B8522-P810
Marking and package	C61157-A8-A87
Packaging	F61074-V8259-Z000
Date codes	L_1126
S-parameters	B8522_NB_UN.s3p (unmatched, narrow band) B8522_WB_UN.s3p (unmatched, wide band) see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8th, 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm for a large variety of matching coils.

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2015. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)