



SAW Components

SAW Duplexer

LTE Band 20

Series/type:	B8621
Ordering code:	B39851B8621P810
Date:	March 19, 2014
Version:	2.1

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.


Datasheet

Application


- Low-loss SAW duplexer for LTE Band 20 systems
- Very high isolation
- Usable passband 30 MHz
- Single-ended to balanced transformation in Antenna-Rx path
- Impedance transformation 50 Ω to 100 Ω in Antenna-Rx path
- Very small size and low height


Features


- Package size 2.0 * 1.6 * 0.47 mm³
- RoHS compatible
- Package for **Surface Mount Technology (SMT)**
- Ni, Au-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitivity Level 3**

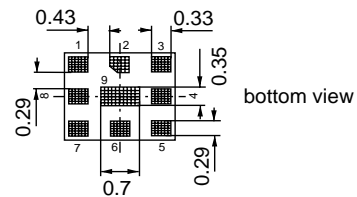

bottom view




side view



top view

Pin configuration

- 3 Tx input
- 1, 8 Rx output (balanced)
- 6 Antenna
- 2, 4, 5, 7, 9 To be grounded



Please read *cautions and warnings and important notes* at the end of this document.

Datasheet

Characteristics

Temperature range for specification:	T = -15 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 11 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced) 45 nH

Characteristics Tx-Antenna		Development status ¹⁾			
		min.	typ. @ 25 °C	max.	
Center frequency	f _c		847.0		MHz
Maximum insertion attenuation	α				
832.0 ... 862.0 MHz		-	2.0	2.8	dB
832.0 ... 862.0 MHz		-	2.0	2.5 ²⁾	dB
Amplitude ripple (p-p)	Δα				
832.0 ... 862.0 MHz		-	1.0	1.9	dB
Input VSWR (Tx port)					
832.0 ... 862.0 MHz		-	1.6	2.0	
Output VSWR (Ant Port)					
832.0 ... 862.0 MHz		-	1.5	2.0	
Absolute attenuation	α				
10.0 ... 771.0 MHz		35	40	-	dB
771.0 ... 791.0 MHz		35	43	-	dB
791.0 ... 821.0 MHz		45	50	-	dB
873.0 ... 903.0 MHz		13	23	-	dB
925.0 ... 960.0 MHz		30	40	-	dB
1565.0 ... 1606.0 MHz		44	46	-	dB
1664.0 ... 2170.0 MHz		35	48	-	dB
2400.0 ... 2620.0 MHz		33	38	-	dB
2620.0 ... 2690.0 MHz		35	47	-	dB
3328.0 ... 3448.0 MHz		35	47	-	dB
4000.0 ... 6000.0 MHz		13	18	-	dB

¹⁾ Values in columns min., typ. and max. indicate the development status of the current version.

²⁾ in +25,+55 °C temperature range

Datasheet

Characteristics

Temperature range for specification:	T = -15 °C to +85 °C
TX terminating impedance:	Z _{Tx} = 50 Ω
ANT terminating impedance:	Z _{Ant} = 50 Ω 11 nH
RX terminating impedance:	Z _{Rx} = 100 Ω (balanced) 45 nH

Characteristics Antenna-Rx		Development status ¹⁾			
		min.	typ. @ 25 °C	max.	
Center frequency	f _c		806.0		MHz
Maximum insertion attenuation	α				
791.0 ... 821.0 MHz		-	2.4	3.5	dB
791.0 ... 821.0 MHz		-	2.4	3.0 ²⁾	dB
Amplitude ripple (p-p)	Δα				
791.0 ... 821.0 MHz		-	1.2	2.5	dB
Input VSWR (Ant port)					
791.0 ... 821.0 MHz		-	1.7	2.0	
Output VSWR (Rx Port)					
791.0 ... 821.0 MHz		-	1.6	2.0	
Common mode rejection ratio					
791.0 ... 821.0 MHz		25	30	-	dB
Absolute attenuation	α				
10.0 ... 770.0 MHz		45	55	-	dB
770.0 ... 782.0 MHz		10	35	-	dB
832.0 ... 833.5 MHz		35	60	-	dB
833.5 ... 862.0 MHz		50	54	-	dB
873.0 ... 903.0 MHz		40	54	-	dB
1623.0 ... 1683.0 MHz		45	62	-	dB
2400.0 ... 2545.0 MHz		45	53	-	dB
2545.0 ... 4000.0 MHz		45	55	-	dB
4000.0 ... 6000.0 MHz		30	34	-	dB
Absolute mean attenuation	α _{mean}				
782.0 ... 790.0 MHz		4	8	-	dB
782.0 ... 790.0 MHz		6 ³⁾	8	-	dB

¹⁾ Values in columns min., typ. and max. indicate the development status of the current version.

²⁾ At +25 °C

³⁾ At +25 °C

Datasheet

Characteristics

Temperature range for specification:	T	=	-15 °C to +85 °C
TX terminating impedance:	Z _{Tx}	=	50 Ω
ANT terminating impedance:	Z _{Ant}	=	50 Ω 11nH
RX terminating impedance:	Z _{Rx}	=	100 Ω (balanced) 45 nH

Characteristics Tx-Rx	Development status ¹⁾			
	min.	typ. @ 25 °C	max.	
Differential mode isolation				
				α
791.0 ... 821.0 MHz	50	54	-	dB
832.0 ... 834.0 MHz	40	60	-	dB
834.0 ... 862.0 MHz	54	57	-	dB
1574.0 ... 1577.0 MHz	40	71	-	dB
1664.0 ... 1724.0 MHz	20	68	-	dB
2496.0 ... 2586.0 MHz	20	62	-	dB
Common mode isolation				
				α
832.0 ... 862.0 MHz	60	63	-	dB

1) Values in columns min., typ. and max. indicate the development status of the current version.

Maximum Ratings

Storage temperature range	T _{stg}	-40/+85	°C	
DC voltage	V _{DC}	5 ¹⁾	V	
ESD voltage, Tx, Ant Port	V _{ESD}	50 ²⁾	V	MM Model
ESD voltage, Tx, Ant Port	V _{ESD}	150 ³⁾	V	HB Model
ESD voltage	V _{ESD}	500 ⁴⁾	V	CD Model
Input power at Tx Port				
832.0 ...862.0 MHz	P _{in}	29	dBm	} LTE UP 5 MHz 50 °C, 5000h
elsewhere	P _{in}	10	dBm	

1) 168h Damp Heat Steady State acc. to IEC60068-2-67 Cy


2) Acc. to FESD22-A115B (MM-Machine Model), 10 negative & 10 positive pulses.

3) Acc. to FESD22-A114F (HBM-Human Body Level), 1 negative & 1 positive pulses.

4) Acc. to FESD22-C101C (CDM-Fiel Inducted Charged device Model), 3 negative & 3 positive pulses.




Matching network (element values depend on PCB layout)

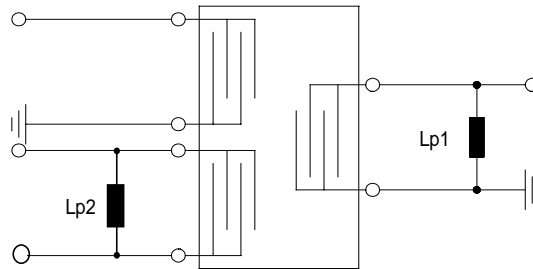


$L_{p1}=11\text{nH}$, $L_{p2}=45\text{nH}$

Frequency Response TX-ANT

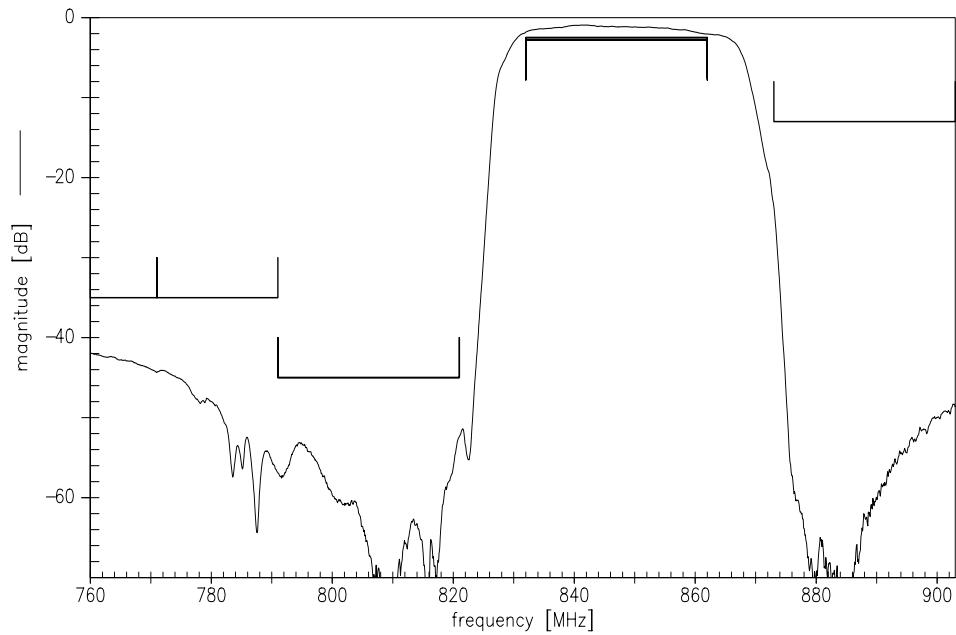


Frequency Response TX-ANT

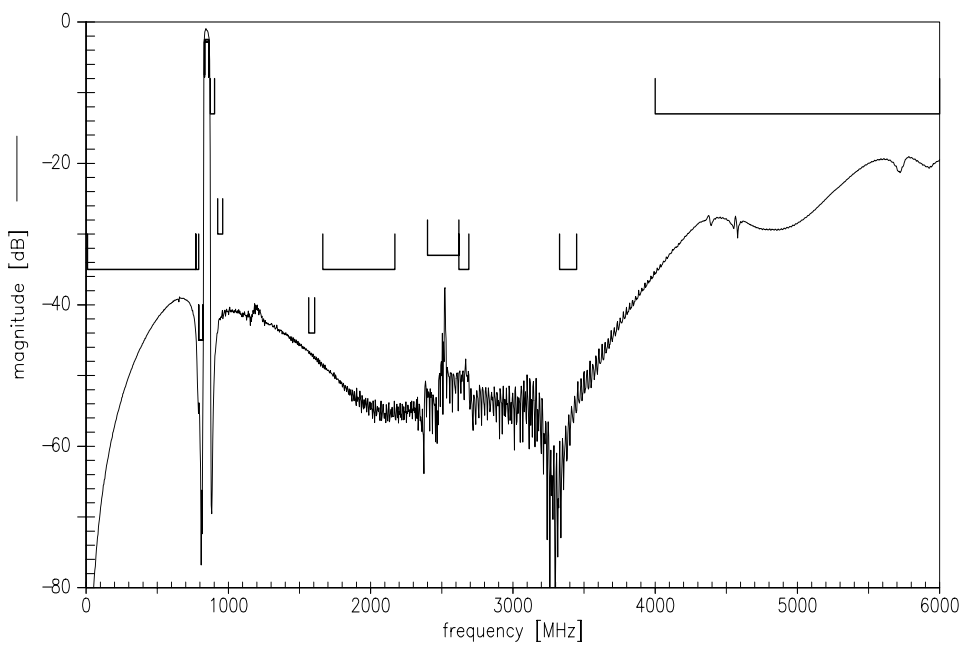


Please read *cautions and warnings* and *important notes* at the end of this document.



Frequency Response ANT-RX

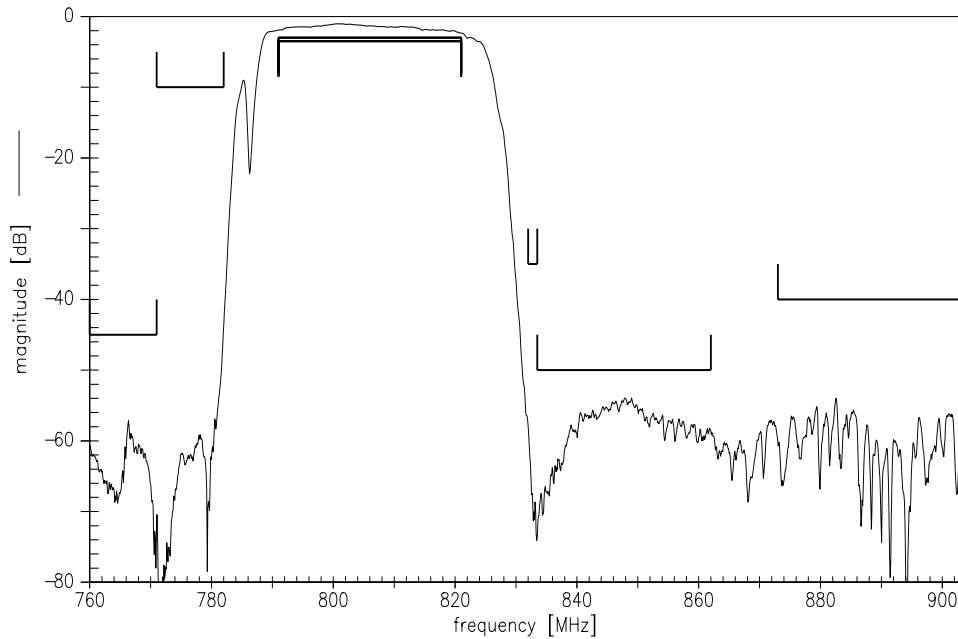


Frequency Response ANT-RX

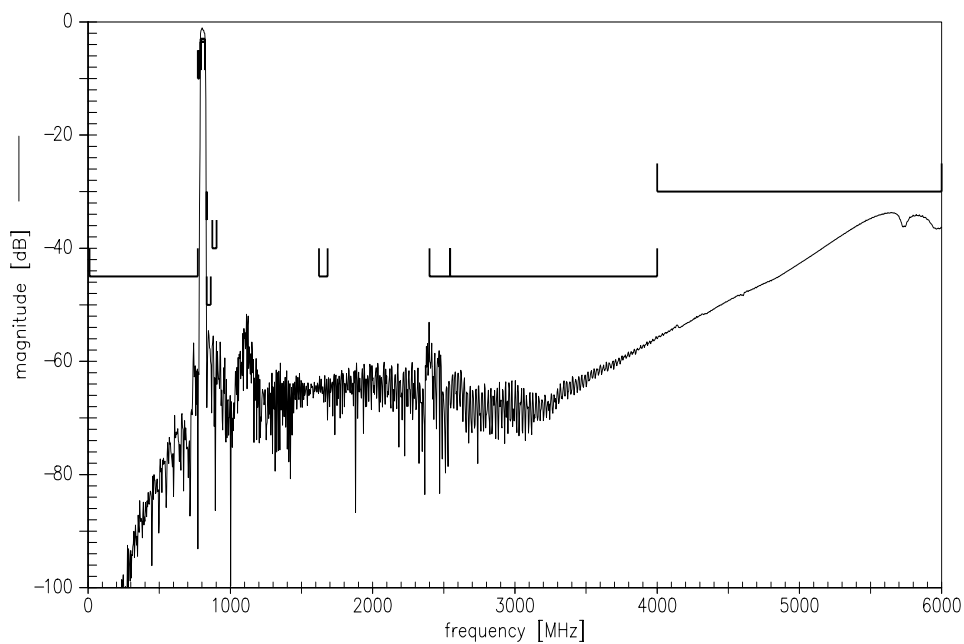


Please read *cautions and warnings* and *important notes* at the end of this document.



Frequency Response TX-RX (ISOLATION)

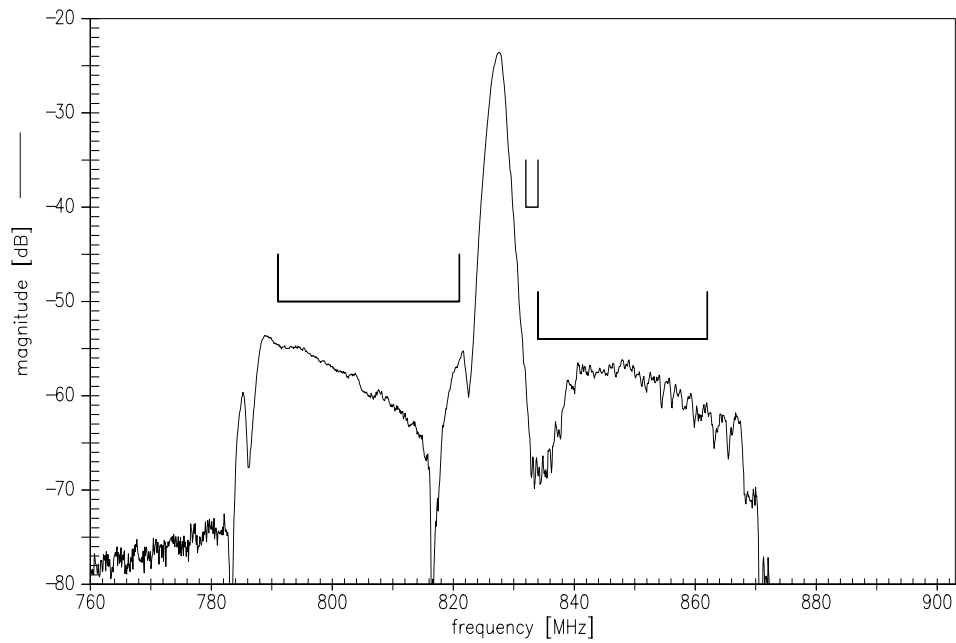



Frequency Response Common Mode Isolation

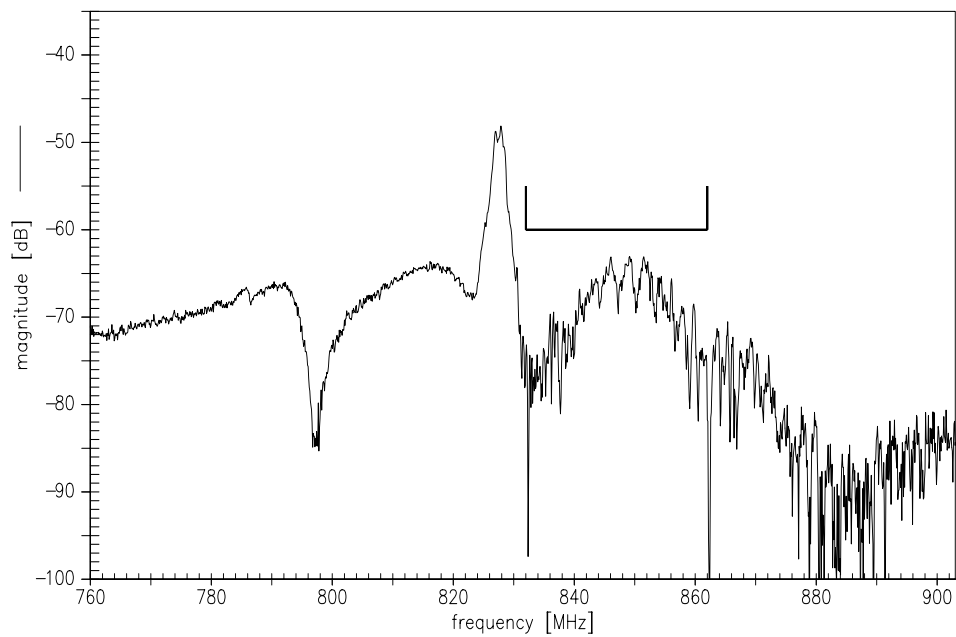



Please read *cautions and warnings* and *important notes* at the end of this document.





S11 VSWR (TX)

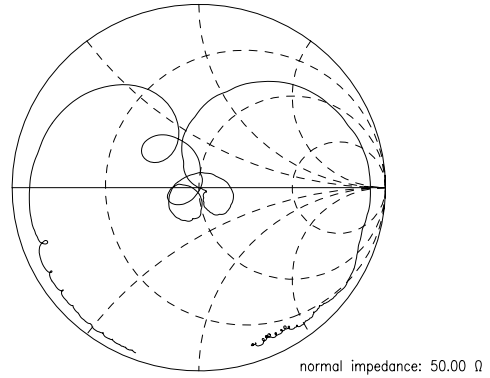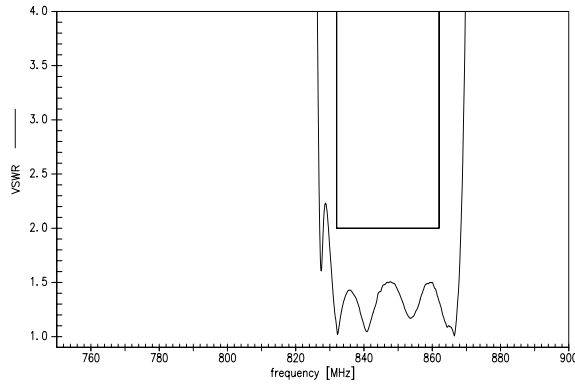

S22 VSWR (ANT)

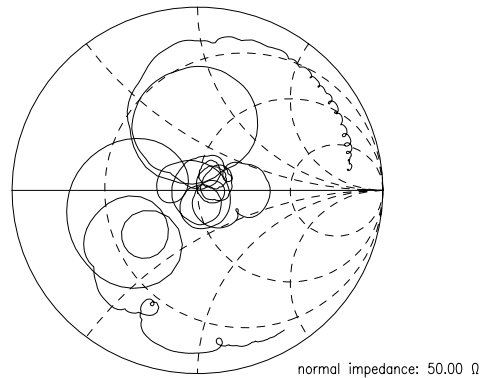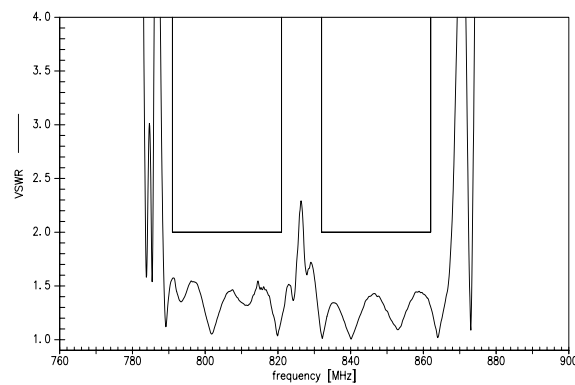

S33 VSWR (RX)

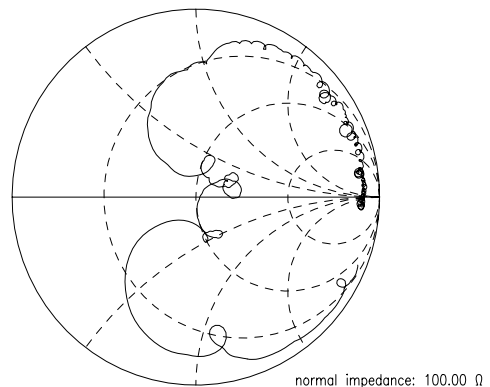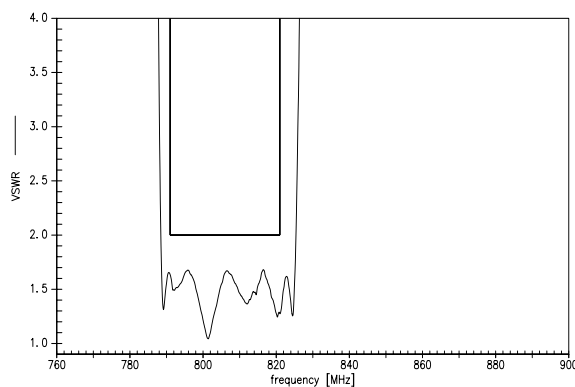

Please read *cautions and warnings* and *important notes* at the end of this document.

SAW Components
B8621
SAW Duplexer
847.0 / 806.0 MHz

Datasheet



References

Type	B8621
Ordering code	B39851B8621P810
Marking and package	C61074-V8248-Z000
Packaging	C61157-A8-A99
Date codes	L_1126
S-parameters	B8621_NB_UN.s4p, B8621_WB_UN.s4p See file header for port/pin assignment table.
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.

11 March 19, 2014

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Qualcomm-RF360](#)