


CUSTOMER DRAWING

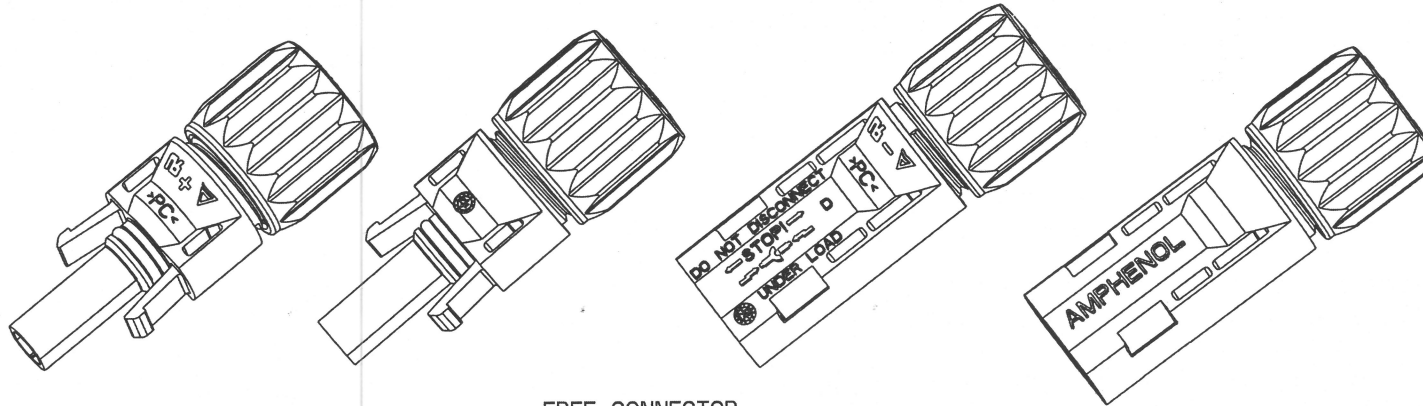

FREE CONNECTOR
(HELIOS H4 CABLEGLAND)

3. SPECIFICATIONS:


DESCRIPTIONS	SPECIFICATIONS		
CONTACT SIZE	2.5mm ² /14AWG	4mm ² /12AWG	6mm ² /10AWG
RATED CURRENT (IEC 62852)	25A @85°C;	35A @85°C;	45A @85°C;
RATED CURRENT (UL 6703)	15A	20A	30A
RATED SYSTEM VOLTAGE	1500V DC(UL) 1000V DC(TUV)		
CERTIFICATE NO(TUV 62852).	R 50388083		
CERTIFICATE NO(UL 6703).	E 339277		
CONTACT RESISTANCE WITH C&F	0.25mΩ TYP.		
CONTACT RESISTANCE WITH S&F	0.30mΩ TYP.		
DEGREE OF PROTECTION,MATED	IP68(1m,1h)		
PIN CONTACT MATERIAL	COPPER, TIN PLATED		
INSULATION MATERIAL	THERMOPLASTIC		
AMBIENT TEMPERATURE RANGE	-40°C TO +85°C		
STRIP LENGTH	7.0±0.5 mm		
CABLE JACKET DIAMETER	4.5 TO 7.8mm		

2. INSTALLATION SPECIFICATIONS REFER TO THE INSTALLATION MANUAL WI-S037-ENG.
1. RECOMMEND USE AMPHENOL SPECIFIC CRIMP TOOL FOR HAND CRIMP.

NOTES:

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

N/A	PRO/ENGINEER INFORMATION
NEXT ASSEMBLY	Pro/e Model Used:
METRIC DOCUMENT	H4_CB_CUSTOMER_DRAWING_PART
	Drawing Name:
	H4_CB_CUSTOMER_DRAWING





REVISIONS		
LTR	DESCRIPTION	DATE
I	ADD H4-R DETAIL	2014-11-18
J	UPDATE RATED CURRENT	2015-09-18
K	UPDATE UL1000V TO 1500V	2015-11-11
L	UPDATE IEC 62852	2017-12-03
M	UPDATE SPECIFICATIONS AND NOTES	2018-06-14
N	UPDATE NOTES AND SPECIFICATIONS	2020-10-09

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; OTHER AMPHENOL STANDARDS: 9-9318	MATERIAL SPEC. N/A	APPROVALS	DATE	PARTS LIST		
	PROCESS SPEC. N/A	PREPARED BY: Jimly	2014-11-18	Amphenol Technology (ShenZhen) Co.,Ltd Building C, 2nd Industrial Zone of Xia Shi Jia, Jiangshi Community, Gongming Sub-district, Guangming New District, Shenzhen, PRC		
		DESIGN MANAGER: Allen		Helios H4 Cablegland connector customer drawing		
		DESIGN ACTIVITY GROUP: C&I		SIZE: C	CASE CODE: 77820	DOCUMENT NO: H4C(I)C(I)
LEGENDS: △ FLAG NOTE CALL OUT REFERENCE ONLY		THIRD ANGLE PROJECTION		SCALE: 1:0		SHEET 1 OF 4

DOCUMENT NO: H4C(I)C(I) SHEET 1 OF 4 REV: N



DOCUMENT NO: H4C(I)C(I) SHEET 1 OF 4 REV: N

FREE CONNECTOR
(HELIOS H4 CABLEGLAND)

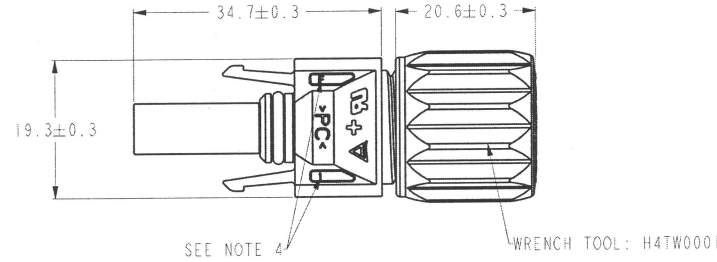

ORIGINAL COPY (正本)
10 OCT 2020
DOCUMENT CONTROL

FEMALE

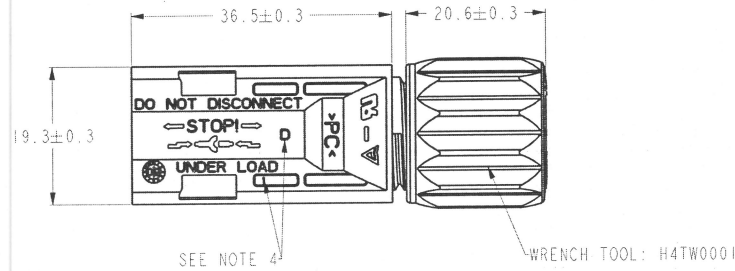

MALE



7. IT IS FORBIDDEN TO MATING WITH OTHER BRAND CONNECTOR.
6. SUGGEST CUSTOMER USING DOUBLE 1.25 SAFTY FACTOR FOR FILELD USING.
5. PLEASE BE AWARE THAT THE 3rd PARTY LABORATORY TEST JUST AS A REFERENCE FOR APPLICATION DESIGN. IT'S CUSTOMER'S RESPONSIBILITY TO VALIDATE SYSTEM FUNCTION AND CONNECTOR DURABILITY AT SPECIFIC APPLICATION AND EXTREME ENVIRONMENT CONDITIONS. WE RECOMMEND CUSTOMER TO CONSIDER MARGIN IN APPLICATION DESIGN TO AVOID OVERHEAT IN HIGH CURRENT SITUATION.
4. THE MARK OF LETTERS JUST THE VERSION OF THE PLASTIC PARTS AND CAVITY NUMBER FOR AMPHENOL'S MANUFACTURE PROCEDURE. WHEN THE CUSTOMER INSPECT THE PRODUCT, THEY CAN IGNORE THESE NUMBERS.

NOTES:



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

SIZE C	CAGE CODE 77820	DOCUMENT NO. H4C(IC)	REV. N
SCALE: 1:0		REF:	SHEET 2 OF 4


STAMPING & FORMING CONTACT

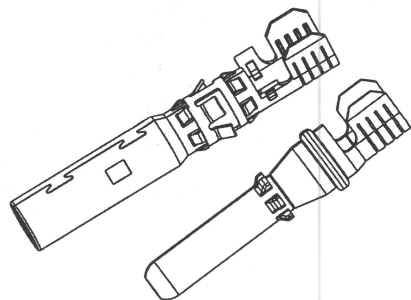

SOCKET (FEMALE)




PIN (MALE)




CABLE SIZE	A (mm)
1.5 & 2.5mm ²	4.8
4.0 & 6.0mm ²	5.8

COLD FORGING CONTACT




ACCEPT WIRE CONDUCTOR SIZE mm ² (AWG)	"A"	"B"
2.5 (14)	2.30	3.51
4.0 (12)	3.05	4.57
6.0 (10)	3.76	6.00




ACCEPT WIRE CONDUCTOR SIZE mm ² (AWG)	"C"	"D"	"E"
2.5 (14)	2.30	3.51	27.5
4.0 (12)	3.05	4.57	27.5
6.0 (10)	3.76	6.00	28.3

ORIGINAL COPY (正本原稿)
10 OCT 2020
DOCUMENT CONTROL

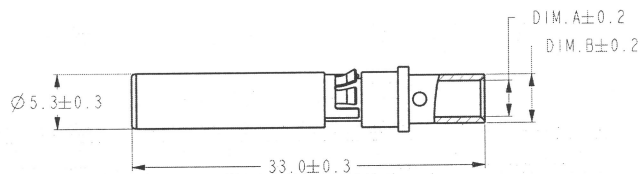

SOCKET (FEMALE)

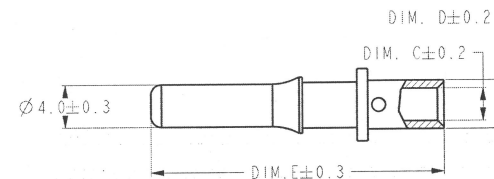

PIN (MALE)

NOTES:


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

SIZE C	CASE CODE 77820	DOCUMENT NO. H4C(I)C(1)	REV. N
SCALE: 1:0		REF:	SHEET 3 OF 4

ORDER P/N IN SYSTEM:

H4CFC4DMS

- (BLANK): COLD FORGING CONTACT OR WITHOUT CONTACT
- S: STAMPING & FORMING CONTACT
- I: INDIVIDUAL PACKING WITH PE BAG (800PCS PER BOX)
- C: BULK PACK 100PCS WITH PE BAG (1000PCS PER BOX)
- M: BULK PACK 500PCS PER PE BAG (1000PCS PER BOX)
- D: TUV & UL APPROVAL
- O: WITHOUT CONTACT
- 2: FOR 2.5mm²/14AWG CABLE (FOR CF, ALSO FOR 15 & 2.5mm²/16 & 14AWG S&F)
- 4: FOR 4.0mm²/12AWG CABLE (FOR CF, ALSO FOR 4.0 & 6.0mm²/12 & 10AWG S&F)
- 6: FOR 6.0mm²/10AWG CABLE (FOR CF ONLY)
- C: H4 CABLE GLAND
- F: FEMALE
- M: MALE



NOTES:

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

SIZE C	CAGE CODE 77820	DOCUMENT NO. H4C(I)C	REV. N
SCALE: 1:0		REF.	SHEET 4 OF 4

DOCUMENT NO. H4C(I)C SHEET 4 OF 4 REV. N

DOCUMENT NO. H4C(I)C SHEET 4 OF 4 REV. N

单击下面可查看定价，库存，交付和生命周期等信息

[>>Amphenol\(安费诺\)](#)