

HUW Series

Features

- 135°C, 2,000 ~ 4,000 hours assured
- Low ESR and High ripple current
- RoHS compliance
- AEC-Q200 qualified




Marking color: Dark Green

Specifications

| Items | Performance | | | | | | | | | | | | | | | | | | | |
|---|--|--|------------------------------|----------------|--|-----------------|------------------------|------------------------------|------------------------|-----------------------|-----------------------------------|-----|-----|-----------------------------------|-----|-----------------------|------------------------|-----|-----|-----|
| Category Temperature Range | -55°C ~ +135°C | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (at 120 Hz, 20°C) | | | | | | | | | | | | | | | | | | | |
| Leakage Current (at 20°C) | I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V | | | | | | | | | | | | | | | | | | | |
| Tanδ (at 120 Hz, 20°C) | See Standard Ratings | | | | | | | | | | | | | | | | | | | |
| Low Temperature Characteristics (at 100k Hz) | Impedance ratio shall not exceed the values given in the table below | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio</td> <td>Z (-25°C) / Z (+20°C)</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> </tr> <tr> <td>Z (-55°C) / Z (+20°C)</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> </tr> </tbody> </table> | Rated Voltage | | 16 | 25 | 35 | 50 | 63 | Impedance ratio | Z (-25°C) / Z (+20°C) | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | Z (-55°C) / Z (+20°C) | 2.0 | 2.0 | 2.0 | 2.0 |
| Rated Voltage | | 16 | 25 | 35 | 50 | 63 | | | | | | | | | | | | | | |
| Impedance ratio | Z (-25°C) / Z (+20°C) | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | | | | | | | | | | | | | | |
| | Z (-55°C) / Z (+20°C) | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 | | | | | | | | | | | | | | |
| Endurance | <table border="1"> <thead> <tr> <th rowspan="2">Test Time</th> <th>135°C</th> <th>125°C</th> </tr> </thead> <tbody> <tr> <td>2,000 Hrs for φ D = 6.3 mm 4,000 Hrs for φ D = 8~ 10 mm</td> <td>4,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td colspan="2">Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td colspan="2">Less than 200% of specified value</td> </tr> <tr> <td>ESR</td> <td colspan="2">Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td colspan="2">Within specified value</td> </tr> </tbody> </table> | Test Time | 135°C | 125°C | 2,000 Hrs for φ D = 6.3 mm 4,000 Hrs for φ D = 8~ 10 mm | 4,000 Hrs | Capacitance Change | Within ±30% of initial value | | Tanδ | Less than 200% of specified value | | ESR | Less than 200% of specified value | | Leakage Current | Within specified value | | | |
| | Test Time | | 135°C | 125°C | | | | | | | | | | | | | | | | |
| | | 2,000 Hrs for φ D = 6.3 mm 4,000 Hrs for φ D = 8~ 10 mm | 4,000 Hrs | | | | | | | | | | | | | | | | | |
| | Capacitance Change | Within ±30% of initial value | | | | | | | | | | | | | | | | | | |
| | Tanδ | Less than 200% of specified value | | | | | | | | | | | | | | | | | | |
| ESR | Less than 200% of specified value | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | |
| | * The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 / 4,000 hours at 125 or 135°C. | | | | | | | | | | | | | | | | | | | |
| Shelf Life Test | * After storage for 1,000 hours at 135 ± 2°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment) | | | | | | | | | | | | | | | | | | | |
| Resistance to Soldering Heat (Please refer to page 15 for reflowsoldering conditions) | <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Within specified value</td> </tr> <tr> <td>ESR</td> <td>Within specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> | Capacitance Change | Within ±10% of initial value | Tanδ | Within specified value | ESR | Within specified value | Leakage Current | Within specified value | | | | | | | | | | | |
| | Capacitance Change | Within ±10% of initial value | | | | | | | | | | | | | | | | | | |
| | Tanδ | Within specified value | | | | | | | | | | | | | | | | | | |
| | ESR | Within specified value | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| Ripple Current and Frequency Multipliers | <table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>120 ≤ f < 1k</th> <th>1k ≤ f < 10k</th> <th>10k ≤ f < 100k</th> <th>100k ≤ f < 500k</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.1</td> <td>0.3</td> <td>0.6</td> <td>1.0</td> </tr> </tbody> </table> | Frequency (Hz) | 120 ≤ f < 1k | 1k ≤ f < 10k | 10k ≤ f < 100k | 100k ≤ f < 500k | Multiplier | 0.1 | 0.3 | 0.6 | 1.0 | | | | | | | | | |
| | Frequency (Hz) | 120 ≤ f < 1k | 1k ≤ f < 10k | 10k ≤ f < 100k | 100k ≤ f < 500k | | | | | | | | | | | | | | | |
| Multiplier | 0.1 | 0.3 | 0.6 | 1.0 | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |

Diagram of Dimensions

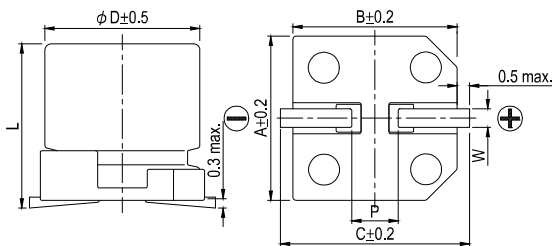

Lead Spacing and Diameter



Unit: mm

| φ D | L | A | B | C | W | P ± 0.2 |
|-----|------------|------|------|------|-----------|---------|
| 6.3 | 5.8 ± 0.3 | 6.6 | 6.6 | 7.2 | 0.5 ~ 0.8 | 2.0 |
| 6.3 | 7.7 ± 0.3 | 6.6 | 6.6 | 7.2 | 0.5 ~ 0.8 | 2.0 |
| 8 | 10.0 ± 0.5 | 8.3 | 8.3 | 9.0 | 0.7 ~ 1.1 | 3.1 |
| 10 | 10.0 ± 0.5 | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7 |
| 10 | 12.5 ± 0.5 | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7 |
| 10 | 16.5 ± 0.5 | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7 |

Marking

φ D = 6.3

φ D = 8 ~ 10

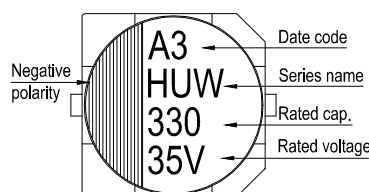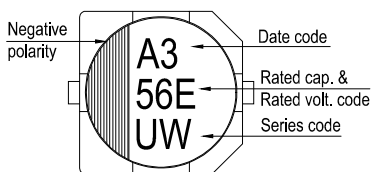



Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 100k Hz

Standard Ratings

| Rated Voltage (V) | Surge Voltage (V) | Capacitance (μ F) | Size $\phi D \times L$ (mm) | Tan δ (120 Hz, 20°C) | L C (μ A) | E S R (m Ω /at 100kHz, 20°C max.) | Rated R. C. (mA/rms at 100k Hz) | |
|-------------------|-------------------|------------------------|-----------------------------|-----------------------------|----------------|--|---------------------------------|-------|
| | | | | | | | 125°C | 135°C |
| 16V (1C) | 18.4 | 82 | 6.3 × 5.8 | 0.16 | 13.1 | 45 | 1,700 | 950 |
| | | 150 | 6.3 × 7.7 | | 24.0 | 27 | 2,500 | 1,450 |
| | | 270 | 8 × 10 | | 43.2 | 20 | 3,050 | 1,700 |
| | | 470 | 10 × 10 | | 75.2 | 18 | 3,400 | 2,100 |
| | | 560 | 10 × 12.5 | | 89.6 | 15 | 4,200 | 2,550 |
| 25V (1E) | 28.8 | 56 | 6.3 × 5.8 | 0.14 | 14.0 | 50 | 1,400 | 900 |
| | | 100 | 6.3 × 7.7 | | 25.0 | 30 | 2,100 | 1,400 |
| | | 220 | 8 × 10 | | 55.0 | 22 | 2,900 | 1,600 |
| | | 330 | 10 × 10 | | 82.5 | 20 | 3,300 | 2,000 |
| | | 470 | 10 × 12.5 | | 117 | 16 | 4,050 | 2,500 |
| | | 560 | 10 × 16.5 | | 140 | 14 | 4,300 | 2,500 |
| 35V (1V) | 40.3 | 47 | 6.3 × 5.8 | 0.12 | 16.5 | 60 | 1,400 | 900 |
| | | 68 | 6.3 × 7.7 | | 23.8 | 35 | 2,100 | 1,400 |
| | | 150 | 8 × 10 | | 52.5 | 22 | 2,900 | 1,600 |
| | | 270 | 10 × 10 | | 94.5 | 20 | 3,300 | 2,000 |
| | | 330 | 10 × 12.5 | | 115 | 17 | 3,950 | 2,400 |
| | | 470 | 10 × 16.5 | | 164 | 14 | 4,300 | 2,500 |
| 50V (1H) | 57.5 | 33 | 8 × 10 | 0.10 | 16.5 | 30 | 2,400 | 1,250 |
| | | 47 | 8 × 10 | | 23.5 | 30 | 2,400 | 1,250 |
| | | 56 | 10 × 10 | | 28.0 | 25 | 2,900 | 1,600 |
| | | 68 | 8 × 10 | | 34.0 | 30 | 2,400 | 1,250 |
| | | 100 | 10 × 10 | | 50.0 | 25 | 2,900 | 1,600 |
| | | 120 | 10 × 10 | | 60.0 | 25 | 2,900 | 1,600 |
| | | 150 | 10 × 12.5 | | 75.0 | 19 | 3,700 | 2,250 |
| | | 220 | 10 × 16.5 | | 110 | 16 | 4,100 | 2,400 |
| 63V (1J) | 72.5 | 22 | 8 × 10 | 0.08 | 13.9 | 40 | 2,100 | 1,100 |
| | | 33 | 8 × 10 | | 20.8 | 40 | 2,100 | 1,100 |
| | | 33 | 10 × 10 | | 20.8 | 30 | 2,600 | 1,400 |
| | | 47 | 8 × 10 | | 29.6 | 40 | 2,100 | 1,100 |
| | | 56 | 10 × 10 | | 35.3 | 30 | 2,600 | 1,400 |
| | | 82 | 10 × 10 | | 51.7 | 30 | 2,600 | 1,400 |
| | | 100 | 10 × 12.5 | | 63.0 | 22 | 3,450 | 2,100 |
| | | 150 | 10 × 16.5 | | 94.5 | 16 | 4,100 | 2,400 |

Part Numbering System

HUW Series 470 μ F \pm 20% 25V Carrier Tape 10 ϕ × 12.5L Pb-free and Coated Case
HUW **471** **M** **1E** **TR** - **1013**
 Series Name Capacitance Capacitance Tolerance Rated Voltage Package Type Terminal Type Case Size Lead Wire and Case Type

Note: For more details, please refer to "Part Numbering System" on page 87.

单击下面可查看定价，库存，交付和生命周期等信息

[>>LELON\(立隆\)](#)